


Installation Instructions for Glass Back Shade MR16

IMPORTANT INFORMATION

- This product is ETL listed for indoor dry locations.

SAVE THESE INSTRUCTIONS!



Install the Accessory Shade in Low Rider Type Fixtures

A

LOUVER HOLDER BASE
LOUVER HOLDER CAP

1: Unscrew and remove the louver holder cap from the louver holder base.

B

GLASS SHADE
MR16 LAMP
SLOTTED SHADE HOLDER

2: Insert the lamp into the glass shade and push the lamp pins completely into the socket holes; simultaneously push the glass shade onto the slotted shade holder.

3: The glass shade must fit snugly onto the slotted shade holder. If adjustment is necessary, carefully bend the slotted shade holder tabs slightly in or out with needle-nose pliers.


C

HEXCELL LOUVER AND/OR GLASS LENS
GLASS SHADE
CAP

4: Place a hexcell louver (Optional) or a glass lens (Optional) or a combination of a hexcell louver and a glass lens on the front of MR16 lamp.



5: Replace and tighten the louver holder cap to the louver holder base.

Install the Accessory shade in Vespa Type MR16 Sockets

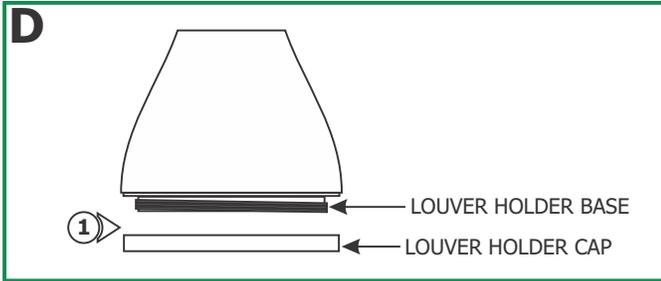

1: Unscrew and remove the louver holder cap from the louver holder base.

2: Push the spring clip completely onto the center of the socket groove until it snaps in place.

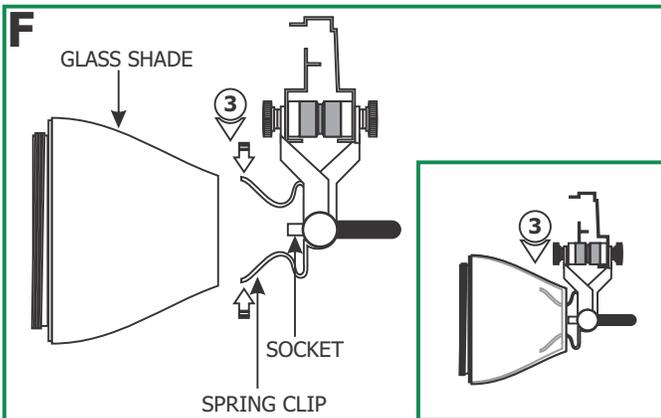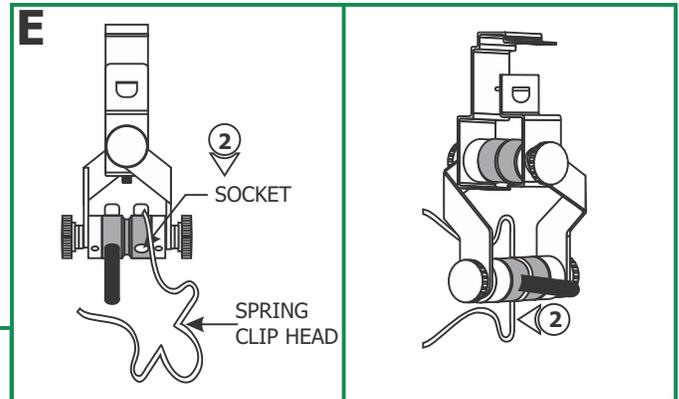

3: Squeeze the spring clip ends while inserting it into the glass shade.

- 4:** Place the lamp into the glass shade, align and push the lamp pins completely into the socket holes.
- 5:** Place a hexcell louver (Optional) or a glass lens (Optional) or a combination of a hexcell louver and a glass lens on front of the MR16 lamp.
- 6:** Replace and tighten the louver holder cap to the louver holder base.

