


# FAST JACK 5, 7, 9 & 17 PORT CANOPIES

REV.04.20.15



**FJP-16RD-9-50W-SN**

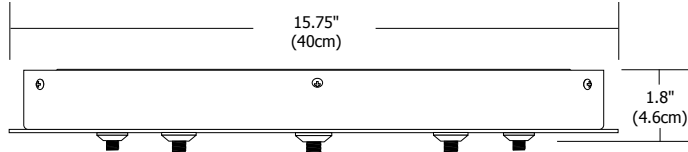

## 16" Round 5, 7 and 9 Port Fast Jack Canopy

The 16" round canopy contains 5, 7 or 9 Fast Jack Ports and mounts to a standard 4" electrical box with plaster ring, or to an octagon box. It includes 3 drywall anchors for additional ceiling support. Halogen version accepts a maximum 12 volt, 50 watt load per port and LED version accepts 40 watt maximum load per port, totaling: 250W (200W LED) for 5-Port, 350W (280W LED) for 7-Port or 450W (360W LED) for 9-Port. Halogen version is dimmable with standard electronic dimmer. **LED** dimming range varies: reference corresponding fixture specification sheet, at [www.edgelighting.com](http://www.edgelighting.com), for dimming details. \*LED version can also be used with maximum of 50 watt halogen load per port.


### Weight:

10 lb (4.5kg)

System	Canopy	Type	Ports	Watts	Finish	Voltage Input
<b>FJP</b>	<b>16RD</b>	Halogen (leave blank)	<b>5</b>	<b>50W</b>	<b>SN</b>	Standard 120V (leave blank)
FJP Fast Jack Power Feed	16RD 16" Round	LED LED	5 5 Ports 7 7 Ports 9 9 Ports	50W 50 Watts per Port	SN Satin Nickel	2 230V 50Hz 3 277V 60Hz (Halogen only)



**FJP-20RD-17-20W-SN**

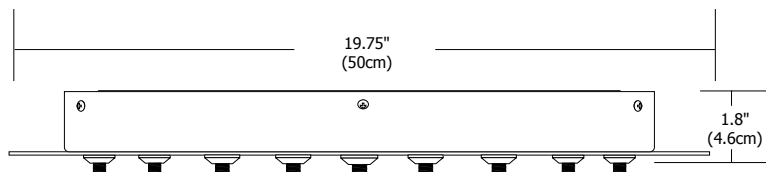

## 20" Round 17 Port Fast Jack Canopy

The 20" Round 17-Port Fast Jack Canopy mounts to a standard 4" electrical box with plaster ring, or to an octagon box. It includes 3 anchors for additional ceiling support. Both halogen and **LED** versions accept maximum of 20 watt 12 volt load per port, total of 340 watts. Halogen version is dimmable with standard electronic dimmer. **LED** dimming range varies: reference corresponding fixture specification sheet, at [www.edgelighting.com](http://www.edgelighting.com), for dimming details.

### Weight:

16 lb (7.3kg)

System	Canopy	Type	Ports	Watts	Finish	Voltage Input
<b>FJP</b>	<b>20RD</b>	Halogen (leave blank)	<b>17</b>	<b>20W</b>	<b>SN</b>	Standard 120V (leave blank)
FJP Fast Jack Power Feed	20RD 20" Round	LED LED	17 17 Ports	20W 20 Watts per Port	SN Satin Nickel	2 230V 50Hz 3 277V 60Hz (Halogen only)

PROJECT:

FIXTURE  
TYPE:

DATE:

