


**CIRRUS MIYO (MAKE IT YOUR OWN) SQUARE WARM DIM LED SUSPENSION WITH POWER**

REV.05.14.18

DESIGNED BY GREGORY KAY | MADE IN USA





Diffused White Lens



Diffused White Lens with White Louver



Diffused White Lens with Black Louver

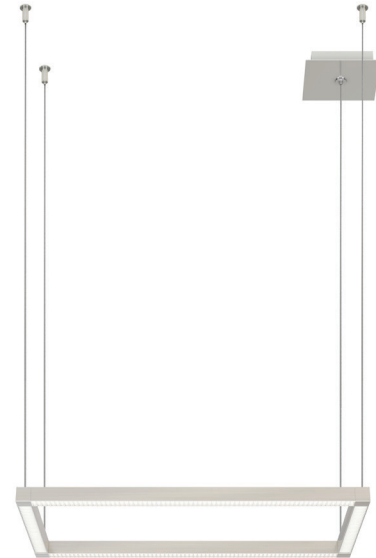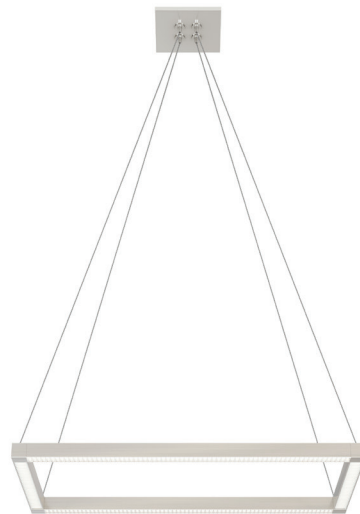

**Description**

With the combination of clean, linear channels that create a geometric shape, the Cirrus MIYO (Make-It-Your-Own) Square LED Suspension is as minimalist as it is futuristic in design. The linear channel that is available in 5 or 7 watts per foot features a diffused flat lens with a 100° beam spread. The LED strip light is available in 85+ or 92+ CRI and can be ordered in various lengths, from 11" to 90" square. An optional white or black louver is available to help reduce glare. On smaller sizes (less than 34" for 5w and 20" for 7w), a flush 4.6" square canopy is supplied. For larger sizes and/or if adding a Fast Jack port in the center of the canopy, an 8.5" square canopy is included. The Fast Jack Connector option in the canopy allows the addition of a pendant or a track head so that you can accent any art work for your unique design. Available in 22K, Warm Dim, and Tunable White options.

**Finishes**

Available in Satin Nickel, Black, Chrome and White finishes with Satin Nickel hardware. Satin Brass comes with Black connectors and canopy.

**Applications**

Designed for indoor use only. Ideal environments include: conference rooms, kitchens, dining rooms, architectural lighting, general lighting, and retail

**Lenses**

- Diffused White Lens with 100° beam spread
- Optional black or white louver

**Lamp**


- Choose from 9 color temperatures from 2200K-5700K including Warm Dim and Tunable White
- Warm Dim (optional): 2700K to 2000K (27D) or 3000K to 2000K (30D)
- Tunable White 2000K-4000K
- 50,000 Hour Lamp Life

**Power Supply (included in canopy)**


- 120V input, 24VDC Class 2 output; electronic low voltage LED power supply
- FJ port power supply 12V

**Dimming**

- Dimmable with ELV dimmer: Legrand, Adorne ADTP703TU; Lutron: Diva DVELV-300P, Skylark SELV-300P, Maestro MAELV-600 and Radio Ra 2



Channel Without Louver (Actual Size)



Channel With Louver (Actual Size)

| System   | Canopy  | Wattage Per Foot  | Canopy                               | Nominal Size (Inches drawing pg. 6)   | Color Temperature   | Finish  |
|--|---|---|--------------------------------------|---|---|---|
| <b>CSDP</b>  | <b>SQ</b>   | <b>5W</b>   | <b>C</b>                             | <b>24</b>   | <b>22K</b>  | <b>SN</b>   |
| <b>CSDP</b> Cirrus MIYO Diffused lens, Power<br><b>CSDWP</b> Cirrus MIYO Diffused Lens with White louver, Power<br><b>CSDBP</b> Cirrus MIYO Diffused Lens with Black louver, Power | <b>SQ</b> Square<br><b>SQF</b> Square with Fast Jack<br>(For fast Jack and 2K4K tunable white center feed 8" round canopy only) | <b>5W</b> 4.4 watt (50° Max Warm Dim)<br><b>7W</b> 7.3 watt (60° Max) | <b>C</b> Center<br><b>E</b> End Feed | 12" to 84" square for 5 watts per foot (Maximum for Warm Dim is 50")<br>12" to 60" square for 7 watts per foot<br><br>Maximum shipping length for Chrome is 84" | <b>22K</b> 2200K Amber White<br><b>27K</b> 2700K Very Warm White<br><b>27D</b> 2700K Warm Dim (5W only)<br><b>30K</b> 3000K Warm White<br><b>30D</b> 3000K Warm Dim (5W only)<br><b>35K</b> 3500K Neutral White<br><b>40K</b> 4000K Cool White<br><b>57K</b> 5700K Daylight White<br><b>2K4K</b> 2000-4000K Tunable White | <b>SN</b> Satin Nickel<br><b>BK</b> Black<br><b>WH</b> White<br><b>CH</b> Chrome<br><b>SB</b> Satin Brass*<br><br>*Includes Black Connectors and Canopy |

|         |  |              |  |      |  |
|---------|--|--------------|--|------|--|
| PROJECT |  | FIXTURE TYPE |  | DATE |  |
|---------|--|--------------|--|------|--|

CIRRUS MIYO (MAKE IT YOUR OWN) SQUARE WARM DIM LED SUSPENSION WITH POWER

REV.05.14.18

DESIGNED BY GREGORY KAY | MADE IN USA


**Finishes:** Finishes available for the Cirrus MiYo Square Warm Dim LED Suspension with Power



CSDP-SQ-5W-C-31-22K-BK



CSDP-SQ-5W-C-31-22K-CH

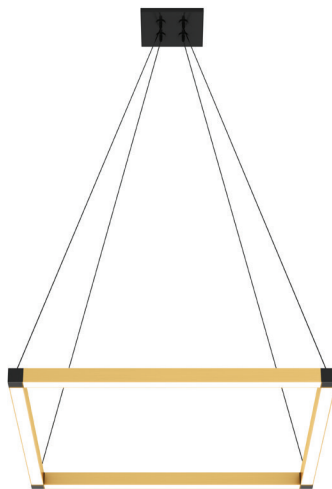

CSDP-SQ-5W-C-31-22K-SB



CSDP-SQ-5W-C-31-22K-SN



CSDP-SQ-5W-C-31-22K-WH

|         |  |              |  |      |  |
|---------|--|--------------|--|------|--|
| PROJECT |  | FIXTURE TYPE |  | DATE |  |
|---------|--|--------------|--|------|--|

# CIRRUS MIYO (MAKE IT YOUR OWN) SQUARE WARM DIM LED SUSPENSION WITH POWER

REV.05.14.18 DESIGNED BY GREGORY KAY | MADE IN USA

## Lamp Data: Lamp data for Downlight Channel


| CSDP   |                |     |      |     |      |     |     |                |     |     |     |     |     |     |
|--|----------------|-----|------|-----|------|-----|-----|----------------|-----|-----|-----|-----|-----|-----|
| Standard Efficiency, 100 Degree Diffused White Lens without Louver |                |     |      |     |      |     |     |                |     |     |     |     |     |     |
| DESCRIPTION  | 5w (4.4 watts) |     |      |     |      |     |     | 7w (7.3 watts) |     |     |     |     |     |     |
| WATTS PER FOOT   | 5w (4.4 watts) |     |      |     |      |     |     | 7w (7.3 watts) |     |     |     |     |     |     |
| COLOR TEMPERATURE  | 22K            | 27K | 27D* | 30K | 30D* | 35K | 40K | 57K            | 22K | 27K | 30K | 35K | 40K | 57K |
| LUMENS PER FOOT (lm/ft)  | 195            | 238 | 236  | 260 | 259  | 298 | 324 | 345            | 307 | 374 | 409 | 469 | 509 | 542 |
| LUMENS PER WATT (lm/w)   | 44             | 54  | 49   | 59  | 54   | 68  | 74  | 78             | 42  | 51  | 56  | 64  | 70  | 74  |
| CRI  | 85+            | 95+ | 95+  | 95+ | 95+  | 85+ | 84  | 84             | 85+ | 95+ | 95+ | 85+ | 84  | 84  |

| CSDP   |                |     |      |     |      |     |     |                |     |     |     |     |     |     |
|--|----------------|-----|------|-----|------|-----|-----|----------------|-----|-----|-----|-----|-----|-----|
| High Efficiency, 100 Degree Diffused White Lens without Louver |                |     |      |     |      |     |     |                |     |     |     |     |     |     |
| DESCRIPTION  | 5w (4.4 watts) |     |      |     |      |     |     | 7w (7.3 watts) |     |     |     |     |     |     |
| WATTS PER FOOT   | 5w (4.4 watts) |     |      |     |      |     |     | 7w (7.3 watts) |     |     |     |     |     |     |
| COLOR TEMPERATURE  | 22K            | 27K | 27D* | 30K | 30D* | 35K | 40K | 57K            | 22K | 27K | 30K | 35K | 40K | 57K |
| LUMENS PER FOOT (lm/ft)  | 240            | 293 | 291  | 320 | 318  | 366 | 398 | 424            | 377 | 461 | 503 | 576 | 627 | 667 |
| LUMENS PER WATT (lm/w)   | 55             | 67  | 61   | 73  | 66   | 83  | 91  | 96             | 52  | 63  | 69  | 79  | 86  | 91  |
| CRI  | 85+            | 95+ | 95+  | 95+ | 95+  | 85+ | 84  | 84             | 85+ | 95+ | 95+ | 85+ | 84  | 84  |

\*27D, 30D - Warm Dim (4.8 Watts)


| CSDWP  |                |     |      |     |      |     |     |                |     |     |     |     |     |     |
|--|----------------|-----|------|-----|------|-----|-----|----------------|-----|-----|-----|-----|-----|-----|
| 100 Degree Diffused White Lens with White Louver |                |     |      |     |      |     |     |                |     |     |     |     |     |     |
| DESCRIPTION                                      | 5w (4.4 watts) |     |      |     |      |     |     | 7w (7.3 watts) |     |     |     |     |     |     |
| WATTS PER FOOT                                   | 5w (4.4 watts) |     |      |     |      |     |     | 7w (7.3 watts) |     |     |     |     |     |     |
| COLOR TEMPERATURE                                | 22K            | 27K | 27D* | 30K | 30D* | 35K | 40K | 57K            | 22K | 27K | 30K | 35K | 40K | 57K |
| LUMENS PER FOOT (lm/ft)                          | 161            | 196 | 218  | 215 | 238  | 246 | 267 | 284            | 253 | 309 | 338 | 387 | 420 | 448 |
| LUMENS PER WATT (lm/w)                           | 37             | 45  | 45   | 49  | 50   | 56  | 61  | 65             | 35  | 42  | 46  | 53  | 58  | 61  |
| CRI  | 85+            | 95+ | 95+  | 95+ | 95+  | 85+ | 84  | 84             | 85+ | 95+ | 95+ | 85+ | 84  | 84  |

| CSDBP  |                |     |      |     |      |     |     |                |     |     |     |     |     |     |
|--|----------------|-----|------|-----|------|-----|-----|----------------|-----|-----|-----|-----|-----|-----|
| 100 Degree Diffused White Lens with Black Louver |                |     |      |     |      |     |     |                |     |     |     |     |     |     |
| DESCRIPTION                                      | 5w (4.4 watts) |     |      |     |      |     |     | 7w (7.3 watts) |     |     |     |     |     |     |
| WATTS PER FOOT                                   | 5w (4.4 watts) |     |      |     |      |     |     | 7w (7.3 watts) |     |     |     |     |     |     |
| COLOR TEMPERATURE                                | 22K            | 27K | 27D* | 30K | 30D* | 35K | 40K | 57K            | 22K | 27K | 30K | 35K | 40K | 57K |
| LUMENS PER FOOT (lm/ft)                          | 93             | 113 | 139  | 124 | 152  | 142 | 154 | 164            | 146 | 178 | 195 | 223 | 243 | 258 |
| LUMENS PER WATT (lm/w)                           | 21             | 26  | 29   | 28  | 32   | 32  | 35  | 37             | 20  | 24  | 27  | 31  | 33  | 35  |
| CRI  | 85+            | 95+ | 95+  | 95+ | 95+  | 85+ | 84  | 84             | 85+ | 95+ | 95+ | 85+ | 84  | 84  |

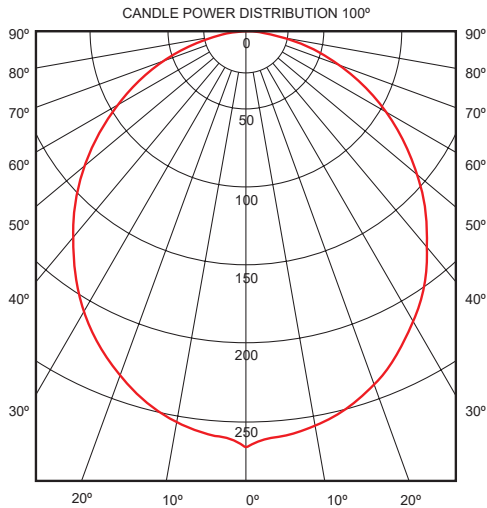


| 5 Watt 100° |              |
|-------------|--------------|
| Distance    | Foot Candles |
| 1'          | 122          |
| 1.5'        | 80           |
| 2'          | 59           |
| 3'          | 38           |
| 4'          | 27           |
| 5'          | 20           |
| 6'          | 15           |
| 7'          | 12           |
| 8'          | 10           |

| 7 Watt 100° |              |
|-------------|--------------|
| Distance    | Foot Candles |
| 1'          | 200          |
| 1.5'        | 131          |
| 2'          | 96           |
| 3'          | 62           |
| 4'          | 45           |
| 5'          | 33           |
| 6'          | 26           |
| 7'          | 21           |
| 8'          | 18           |

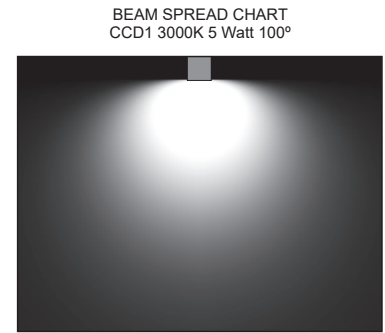

## Finishes: The finishes available for the Cirrus Power Suspension Downlight

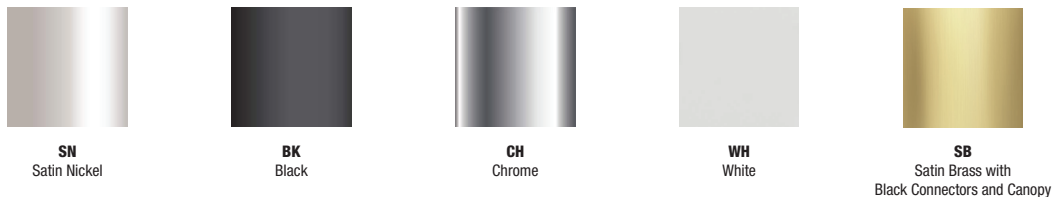

|         |              |      |
|---------|--------------|------|
| PROJECT | FIXTURE TYPE | DATE |
|---------|--------------|------|

# CIRRUS MIYO (MAKE IT YOUR OWN) SQUARE WARM DIM LED SUSPENSION WITH POWER

REV.05.14.18 DESIGNED BY GREGORY KAY | MADE IN USA

**Length Chart:** Actual lengths for Cirrus MIYO Square LED Suspension with Power

| 22K, 27K, 30K, 35K, 40K, 57K & 2K4K |                |                    |             |                         |                                |                                |                    |             |                         |                                |                                |
|-------------------------------------|----------------|--------------------|-------------|-------------------------|--------------------------------|--------------------------------|--------------------|-------------|-------------------------|--------------------------------|--------------------------------|
| Nominal Length (Inches)             | Dim A (Inches) | Total Wattage (5W) | Canopy (5W) | Total Lumens 3000K (5W) | Total Lumens White Louver (5W) | Total Lumens Black Louver (5W) | Total Wattage (7W) | Canopy (7W) | Total Lumens 3000K (7W) | Total Lumens White Louver (7W) | Total Lumens Black Louver (7W) |
| 12                                  | 11.750         | 16                 | 4" Square   | 739                     | 608                            | 352                            | 22                 | 4" Square   | 1309                    | 1082                           | 624                            |
| 14                                  | 14.150         | 20                 | 4" Square   | 924                     | 760                            | 440                            | 28                 | 4" Square   | 1636                    | 1352                           | 780                            |
| 17                                  | 16.550         | 24                 | 4" Square   | 1109                    | 912                            | 528                            | 34                 | 4" Square   | 1963                    | 1622                           | 936                            |
| 19                                  | 18.950         | 28                 | 4" Square   | 1294                    | 1064                           | 616                            | 39                 | 4" Square   | 2290                    | 1893                           | 1092                           |
| 21                                  | 21.350         | 32                 | 4" Square   | 1478                    | 1216                           | 704                            | 45                 | 4" Square   | 2618                    | 2163                           | 1248                           |
| 24                                  | 23.750         | 36                 | 4" Square   | 1663                    | 1368                           | 792                            | 50                 | 4" Square   | 2945                    | 2434                           | 1404                           |
| 26                                  | 26.150         | 40                 | 4" Square   | 1848                    | 1520                           | 880                            | 56                 | 6" Square   | 3272                    | 2704                           | 1560                           |
| 29                                  | 28.550         | 44                 | 4" Square   | 2033                    | 1672                           | 968                            | 62                 | 6" Square   | 3599                    | 2974                           | 1716                           |
| 31                                  | 30.950         | 48                 | 4" Square   | 2218                    | 1824                           | 1056                           | 67                 | 6" Square   | 3926                    | 3245                           | 1872                           |
| 33                                  | 33.350         | 52                 | 6" Square   | 2402                    | 1976                           | 1144                           | 73                 | 6" Square   | 4254                    | 3515                           | 2028                           |
| 36                                  | 35.750         | 56                 | 6" Square   | 2587                    | 2128                           | 1232                           | 78                 | 6" Square   | 4581                    | 3786                           | 2184                           |
| 38                                  | 38.150         | 60                 | 6" Square   | 2772                    | 2280                           | 1320                           | 84                 | 6" Square   | 4908                    | 4056                           | 2340                           |
| 41                                  | 40.550         | 64                 | 6" Square   | 2957                    | 2432                           | 1408                           | 90                 | 6" Square   | 5235                    | 4326                           | 2496                           |
| 43                                  | 42.950         | 68                 | 6" Square   | 3142                    | 2584                           | 1496                           | 95                 | 6" Square   | 5562                    | 4597                           | 2652                           |
| 45                                  | 45.350         | 72                 | 6" Square   | 3326                    | 2736                           | 1584                           | 101                | 6" Square   | 5890                    | 4867                           | 2808                           |
| 48                                  | 47.750         | 76                 | 6" Square   | 3511                    | 2888                           | 1672                           | 106                | 6" Square   | 6217                    | 5138                           | 2964                           |
| 50                                  | 50.150         | 80                 | 6" Square   | 3696                    | 3040                           | 1760                           | 112                | 6" Square   | 6544                    | 5408                           | 3120                           |
| 53                                  | 52.550         | 84                 | 6" Square   | 3881                    | 3192                           | 1848                           | 118                | 6" Square   | 6871                    | 5678                           | 3276                           |
| 55                                  | 54.950         | 88                 | 6" Square   | 4066                    | 3344                           | 1936                           | 123                | 6" Square   | 7198                    | 5949                           | 3432                           |
| 57                                  | 57.350         | 92                 | 6" Square   | 4250                    | 3496                           | 2024                           | 129                | 6" Square   | 7526                    | 6219                           | 3588                           |
| 60                                  | 59.750         | 96                 | 6" Square   | 4435                    | 3648                           | 2112                           | 134                | 6" Square   | 7853                    | 6490                           | 3744                           |
| 62                                  | 62.150         | 100                | 6" Square   | 4620                    | 3800                           | 2200                           | 140                | 6" Square   | 8180                    | 6760                           | 3900                           |
| 65                                  | 64.550         | 104                | 6" Square   | 4805                    | 3952                           | 2288                           |                    |             |                         |                                |                                |
| 67                                  | 66.950         | 108                | 6" Square   | 4990                    | 4104                           | 2376                           |                    |             |                         |                                |                                |
| 69                                  | 69.350         | 112                | 6" Square   | 5174                    | 4256                           | 2464                           |                    |             |                         |                                |                                |
| 72                                  | 71.750         | 116                | 6" Square   | 5359                    | 4408                           | 2552                           |                    |             |                         |                                |                                |
| 74                                  | 74.150         | 120                | 6" Square   | 5544                    | 4560                           | 2640                           |                    |             |                         |                                |                                |
| 77                                  | 76.550         | 124                | 6" Square   | 5729                    | 4712                           | 2728                           |                    |             |                         |                                |                                |
| 79                                  | 78.950         | 128                | 6" Square   | 5914                    | 4864                           | 2816                           |                    |             |                         |                                |                                |
| 81                                  | 81.350         | 132                | 6" Square   | 6098                    | 5016                           | 2904                           |                    |             |                         |                                |                                |
| 84                                  | 83.750         | 136                | 6" Square   | 6283                    | 5168                           | 2992                           |                    |             |                         |                                |                                |

|         |  |              |  |      |  |
|---------|--|--------------|--|------|--|
| PROJECT |  | FIXTURE TYPE |  | DATE |  |
|---------|--|--------------|--|------|--|

# CIRRUS MIYO (MAKE IT YOUR OWN) SQUARE WARM DIM LED SUSPENSION WITH POWER

REV.05.14.18

DESIGNED BY GREGORY KAY | MADE IN USA

**Length Chart:** Actual lengths for Cirrus MIYO Square LED Suspension with Power

| WARM DIM (27D & 30D)    |                |                    |             |                         |                                |                                |
|-------------------------|----------------|--------------------|-------------|-------------------------|--------------------------------|--------------------------------|
| Nominal Length (Inches) | Dim A (Inches) | Total Wattage (5W) | Canopy (5W) | Total Lumens 3000K (5W) | Total Lumens White Louver (5W) | Total Lumens Black Louver (5W) |
| 8                       | 8.150          | 10                 | 4" Square   | 518                     | 476                            | 304                            |
| 11                      | 11.150         | 15                 | 4" Square   | 777                     | 714                            | 456                            |
| 14                      | 14.150         | 20                 | 4" Square   | 1036                    | 952                            | 608                            |
| 17                      | 17.150         | 25                 | 4" Square   | 1295                    | 1190                           | 760                            |
| 20                      | 20.150         | 30                 | 4" Square   | 1554                    | 1428                           | 912                            |
| 23                      | 23.150         | 35                 | 4" Square   | 1813                    | 1666                           | 1064                           |
| 26                      | 26.150         | 40                 | 4" Square   | 2072                    | 1904                           | 1216                           |
| 29                      | 29.150         | 45                 | 4" Square   | 2331                    | 2142                           | 1368                           |
| 32                      | 32.150         | 50                 | 4" Square   | 2590                    | 2380                           | 1520                           |
| 35                      | 35.150         | 55                 | 6" Square   | 2849                    | 2618                           | 1672                           |
| 38                      | 38.150         | 60                 | 6" Square   | 3108                    | 2856                           | 1824                           |
| 41                      | 41.150         | 65                 | 6" Square   | 3367                    | 3094                           | 1976                           |
| 44                      | 44.150         | 70                 | 6" Square   | 3626                    | 3332                           | 2128                           |
| 47                      | 47.150         | 75                 | 6" Square   | 3885                    | 3570                           | 2280                           |
| 50                      | 50.150         | 80                 | 6" Square   | 4144                    | 3808                           | 2432                           |
| 53                      | 53.150         | 85                 | 6" Square   | 4403                    | 4046                           | 2584                           |
| 56                      | 56.150         | 90                 | 6" Square   | 4662                    | 4284                           | 2736                           |
| 59                      | 59.150         | 95                 | 6" Square   | 4921                    | 4522                           | 2888                           |


|         |  |              |  |      |  |
|---------|--|--------------|--|------|--|
| PROJECT |  | FIXTURE TYPE |  | DATE |  |
|---------|--|--------------|--|------|--|

CIRRUS MIYO (MAKE IT YOUR OWN) SQUARE WARM DIM LED SUSPENSION WITH POWER


REV.05.14.18

DESIGNED BY GREGORY KAY | MADE IN USA

Drawings: Dimension drawings for the Cirrus MiYO Square LED Suspension fixture, Center Feed

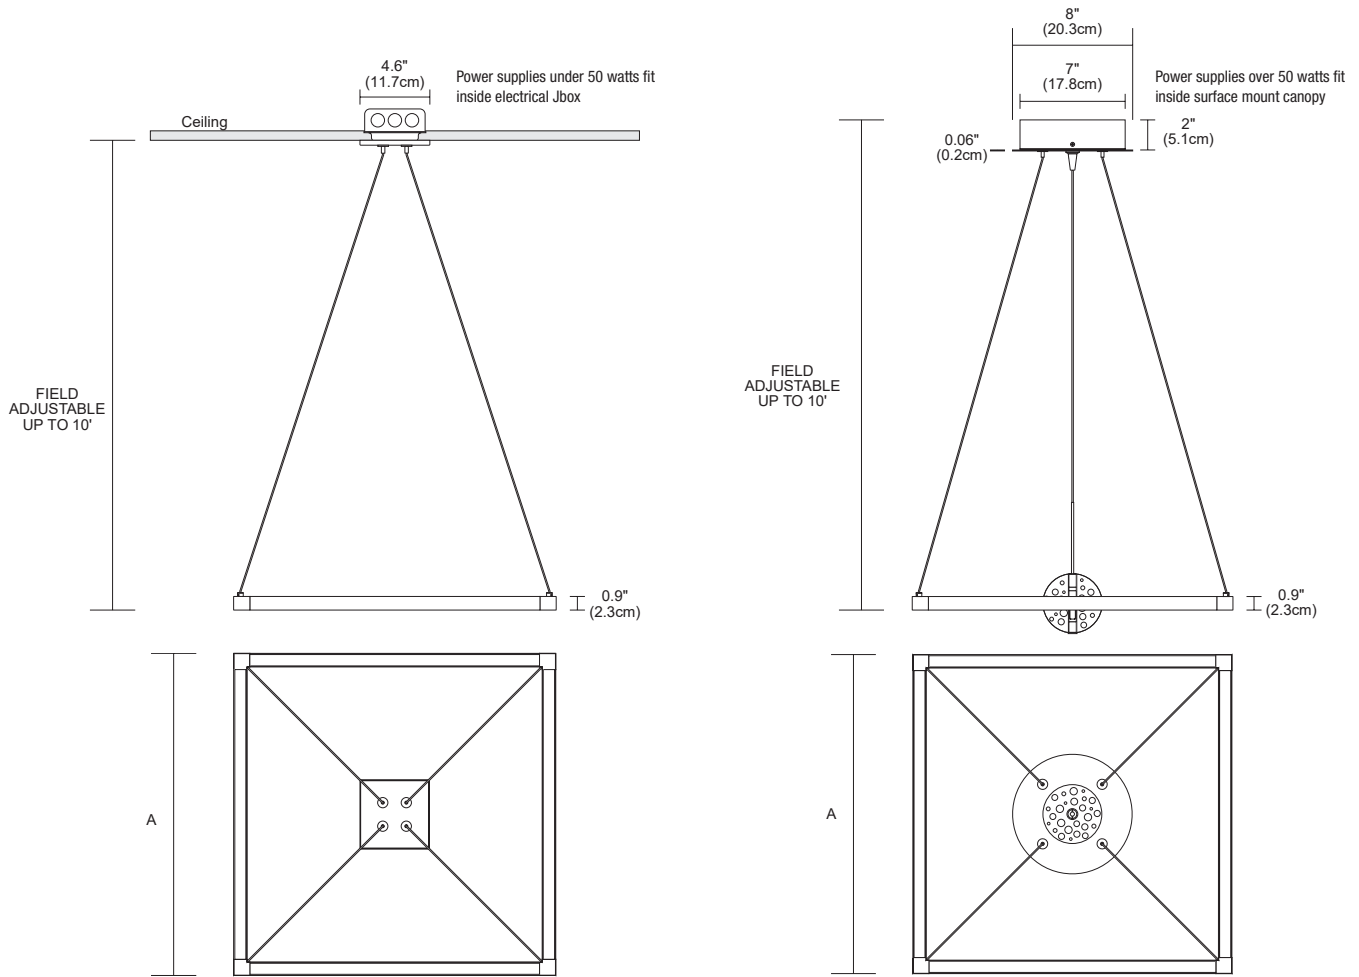

Drawings: Dimension drawings for the Cirrus MiYO Square LED Suspension fixture, End Feed

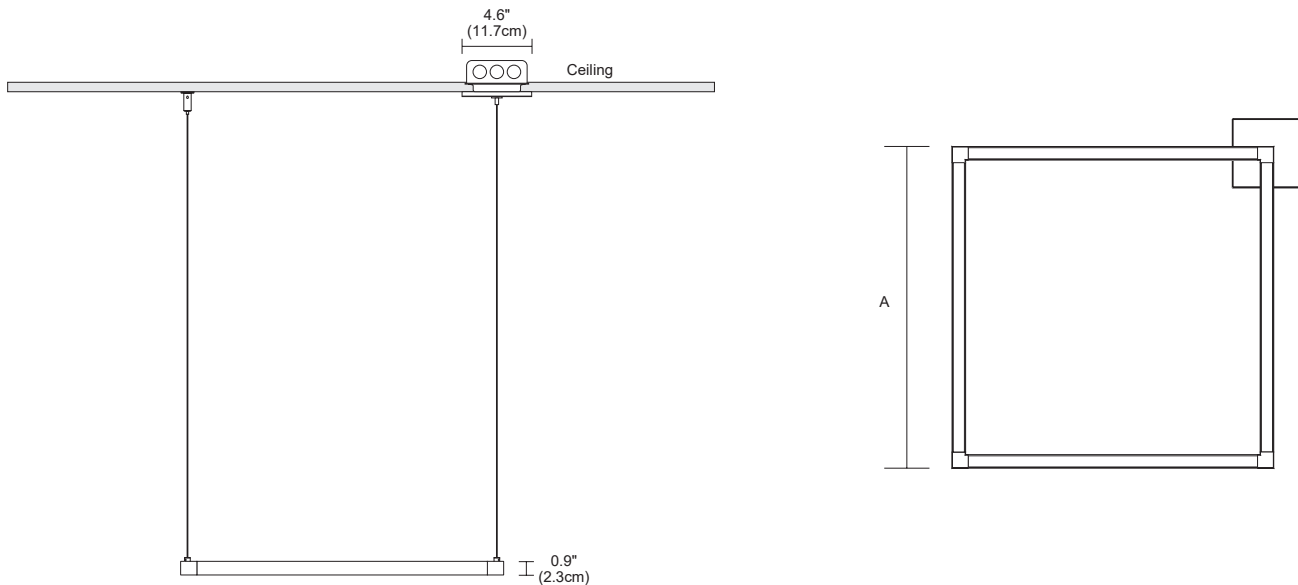

|         |              |      |
|---------|--------------|------|
| PROJECT | FIXTURE TYPE | DATE |
|---------|--------------|------|

**CIRRUS MIYO (MAKE IT YOUR OWN) SQUARE WARM DIM LED SUSPENSION WITH POWER**


REV.05.14.18

DESIGNED BY GREGORY KAY | MADE IN USA

**Wiring Diagram:** Wiring diagram for Static White with ELV Dimmer

**Application:** ELV dimming for Cirrus MiYo Hexagon LED Power Suspension, Center Feed Canopy, Static White

**Dimming:** Dimmable with ELV dimmer: Legrand, Adorne ADTP703TU;  
Lutron: Diva DVELV-300P, Skylark SELV-300P, Maestro MAELV-600 and Radio Ra 2

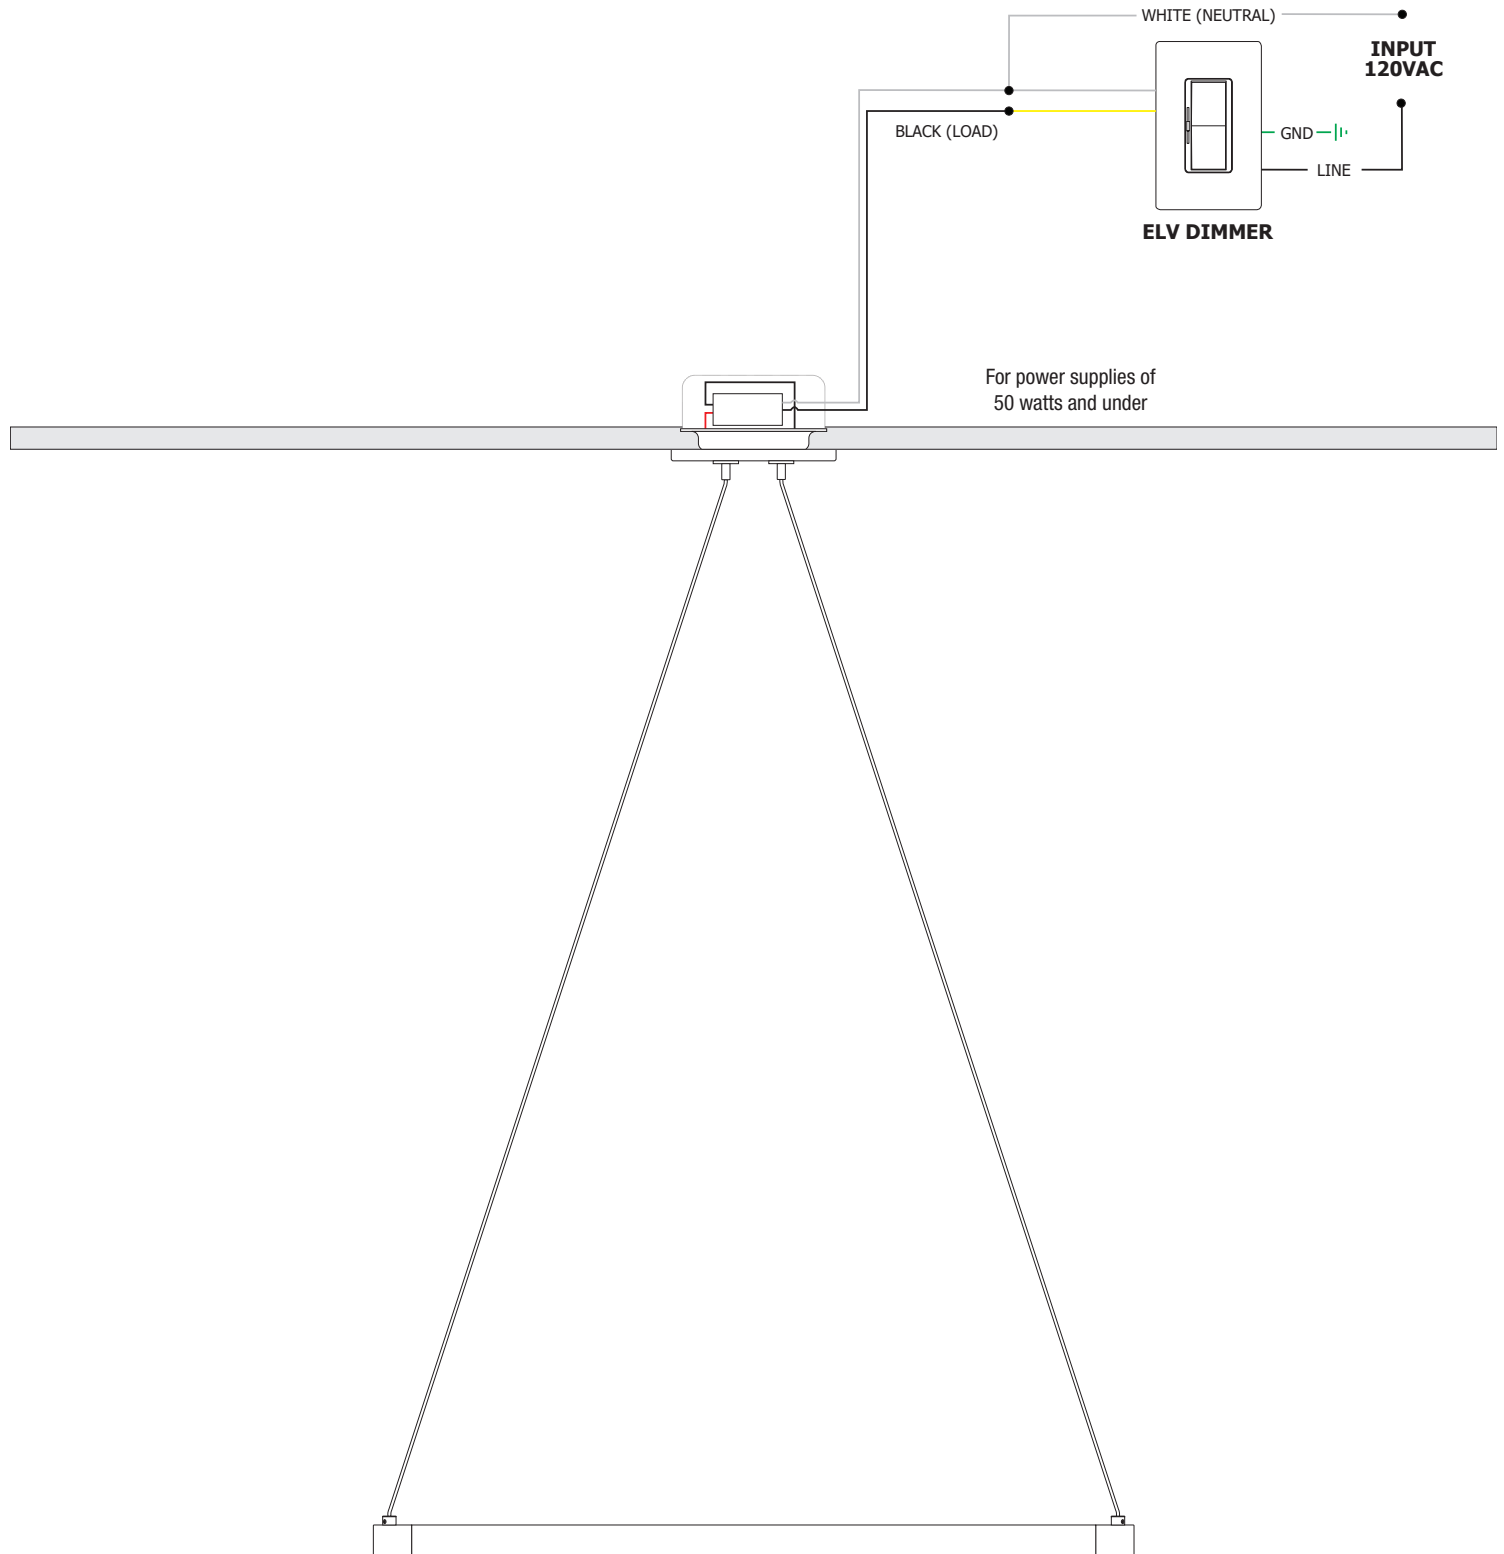

|         |              |      |
|---------|--------------|------|
| PROJECT | FIXTURE TYPE | DATE |
|---------|--------------|------|


CIRRUS MIYO (MAKE IT YOUR OWN) SQUARE WARM DIM LED SUSPENSION WITH POWER

REV.05.14.18 DESIGNED BY GREGORY KAY | MADE IN USA

**Wiring Diagram:** Wiring diagram for Tunable White with Dual ELV Dimmers

**Application:** ELV dimming for Cirrus MiYo Hexagon LED Power Suspension, Center Feed Canopy, Tunable White 2000K-4000K

**Dimming:** Dimmable with ELV dimmer: Legrand, Adorne ADTP703TU;  
Lutron: Diva DVELV-300P, Skylark SELV-300P, Maestro MAELV-600 and Radio Ra 2

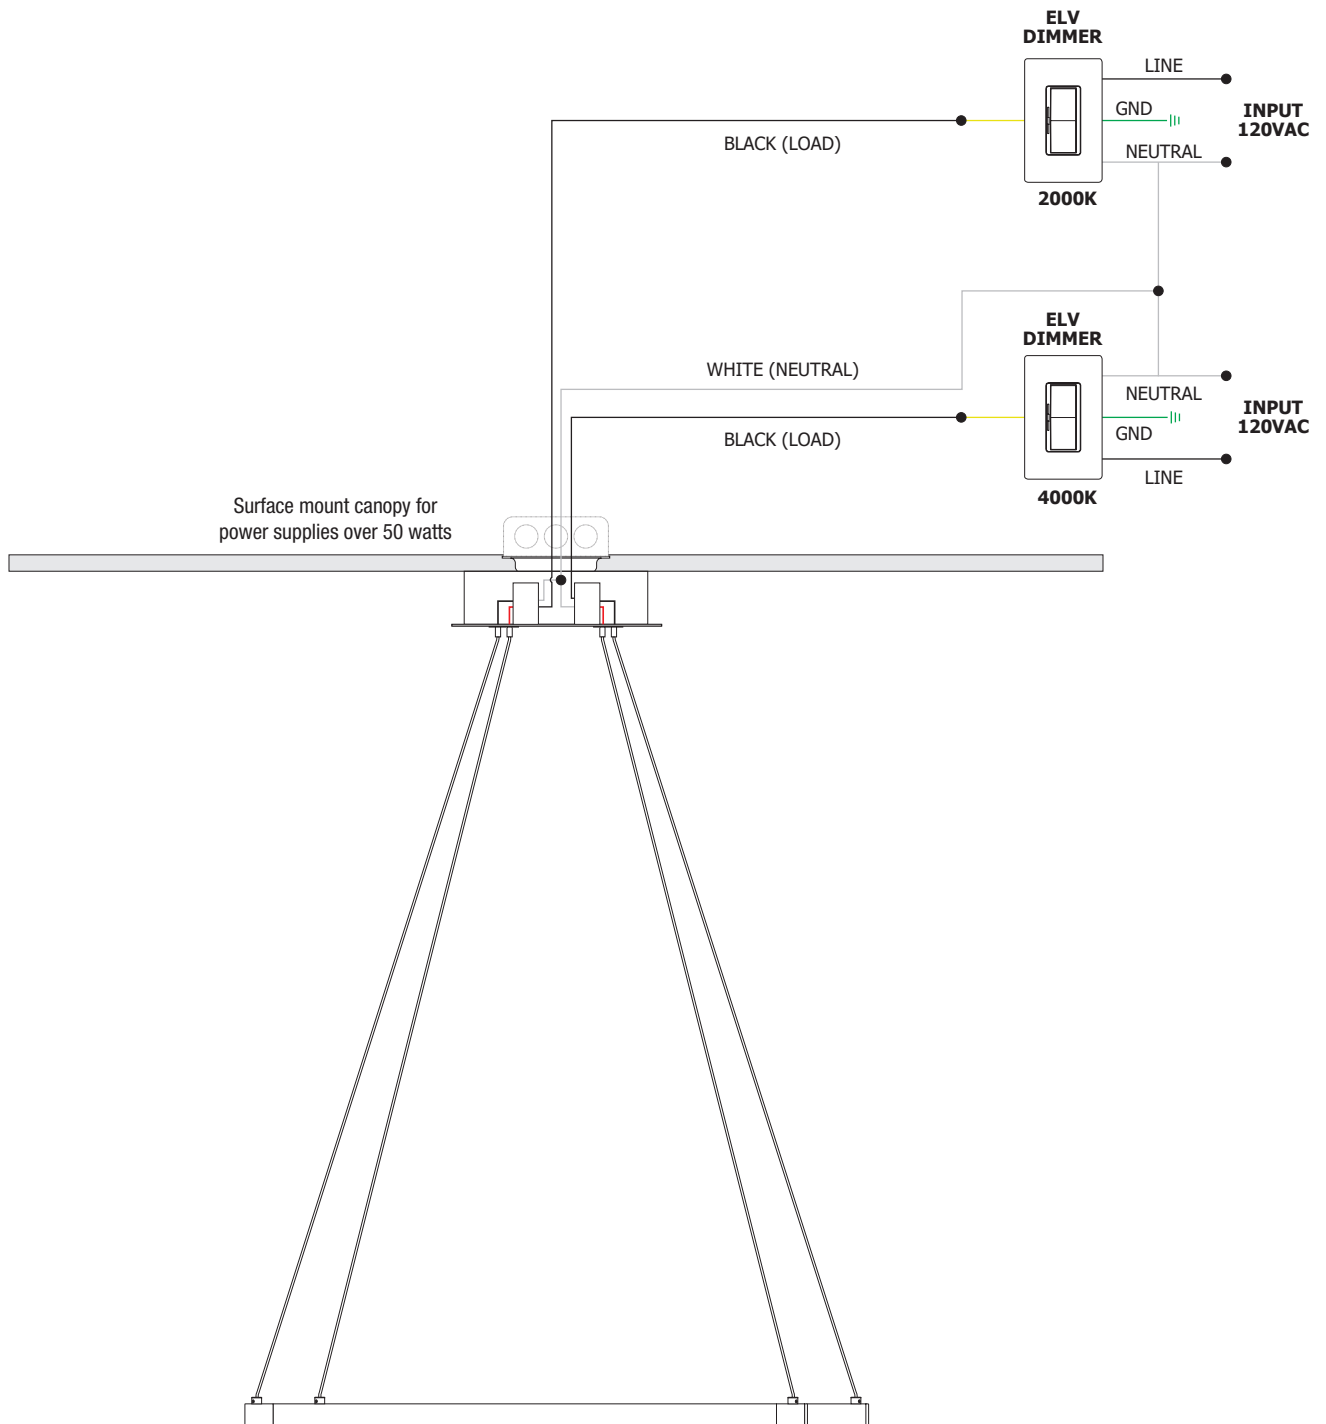

|         |              |      |
|---------|--------------|------|
| PROJECT | FIXTURE TYPE | DATE |
|---------|--------------|------|




CIRRUS MIYO (MAKE IT YOUR OWN) SQUARE WARM DIM LED SUSPENSION WITH POWER

REV.05.14.18 DESIGNED BY GREGORY KAY | MADE IN USA

**Wiring Diagram:** Wiring diagram for Static White with dual ELV Dimmers

**Application:** ELV dimming for Cirrus MiYo Hexagon LED Power Suspension, Center Feed Canopy with Fast Jack, Static White

**Dimming:** Dimmable with ELV dimmer: Legrand, Adorne ADTP703TU;  
Lutron: Diva DVELV-300P, Skylark SELV-300P, Maestro MAELV-600 and Radio Ra 2

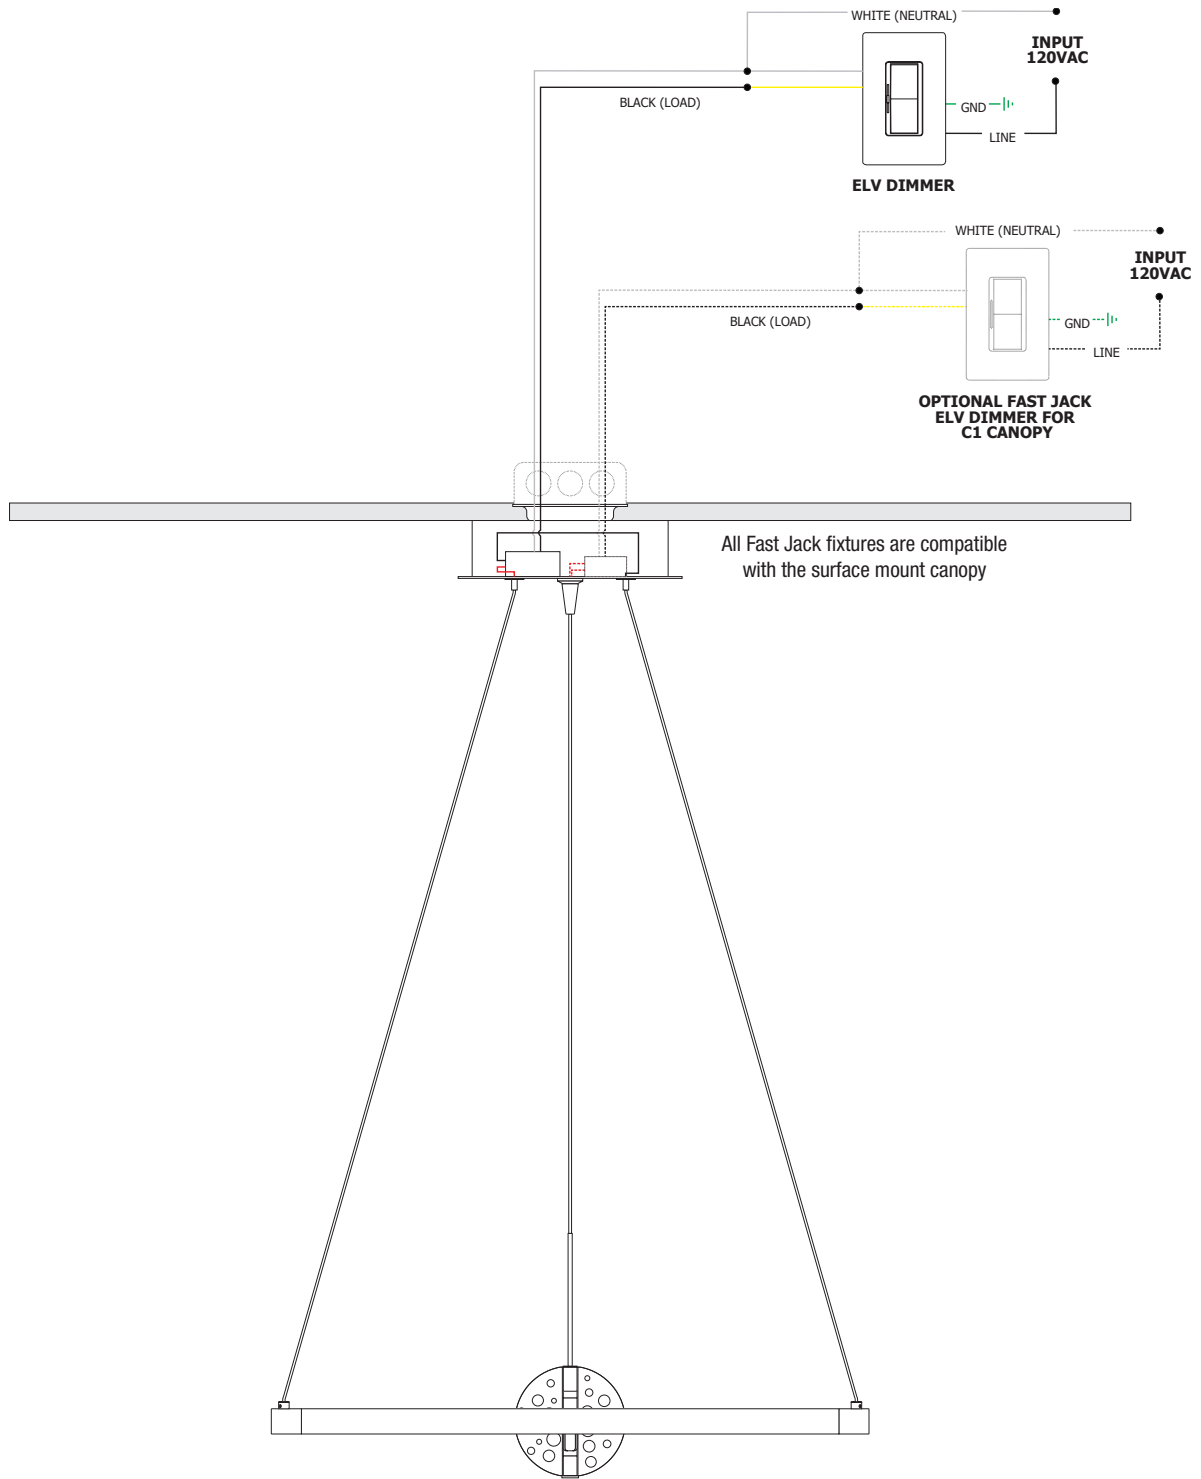

|         |              |      |
|---------|--------------|------|
| PROJECT | FIXTURE TYPE | DATE |
|---------|--------------|------|

**CIRRUS MIYO (MAKE IT YOUR OWN) SQUARE WARM DIM LED SUSPENSION WITH POWER**


REV.05.14.18

DESIGNED BY GREGORY KAY | MADE IN USA

**Wiring Diagram:** Wiring diagram for Static White with ELV Dimmer

**Application:** ELV dimming for Cirrus MiYo Hexagon LED Power Suspension, End Feed Canopy, Static White

**Dimming:** Dimmable with ELV dimmer: Legrand, Adorne ADTP703TU;  
Lutron: Diva DVELV-300P, Skylark SELV-300P, Maestro MAELV-600 and Radio Ra 2

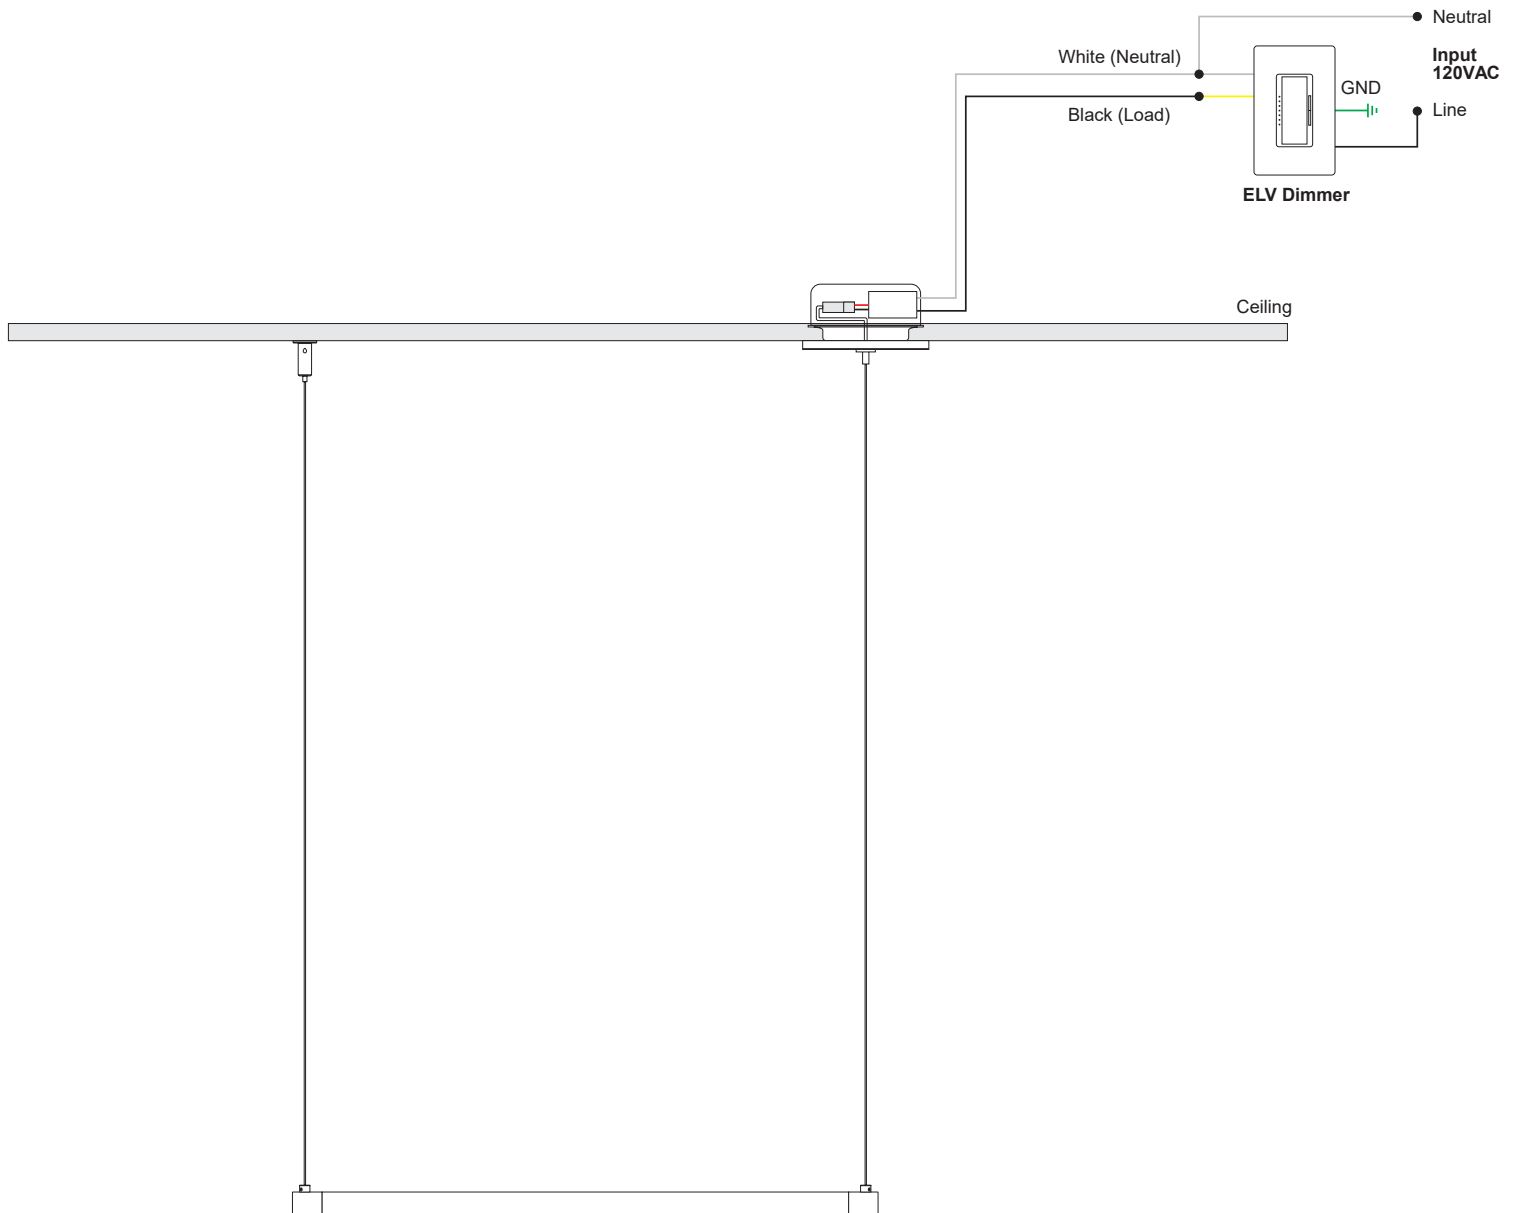

|         |  |              |  |      |  |
|---------|--|--------------|--|------|--|
| PROJECT |  | FIXTURE TYPE |  | DATE |  |
|---------|--|--------------|--|------|--|

**CIRRUS MIYO (MAKE IT YOUR OWN) SQUARE WARM DIM LED SUSPENSION WITH POWER**


REV.05.14.18

DESIGNED BY GREGORY KAY | MADE IN USA

**Wiring Diagram:** Wiring diagram for Tunable White with Dual ELV Dimmers

**Application:** ELV dimming for Cirrus MiYo Hexagon LED Power Suspension, End Feed Canopy, Tunable White 2000K-4000K

**Dimming:** Dimmable with ELV dimmer: Legrand, Adorne ADTP703TU;  
Lutron: Diva DVELV-300P, Skylark SELV-300P, Maestro MAELV-600 and Radio Ra 2

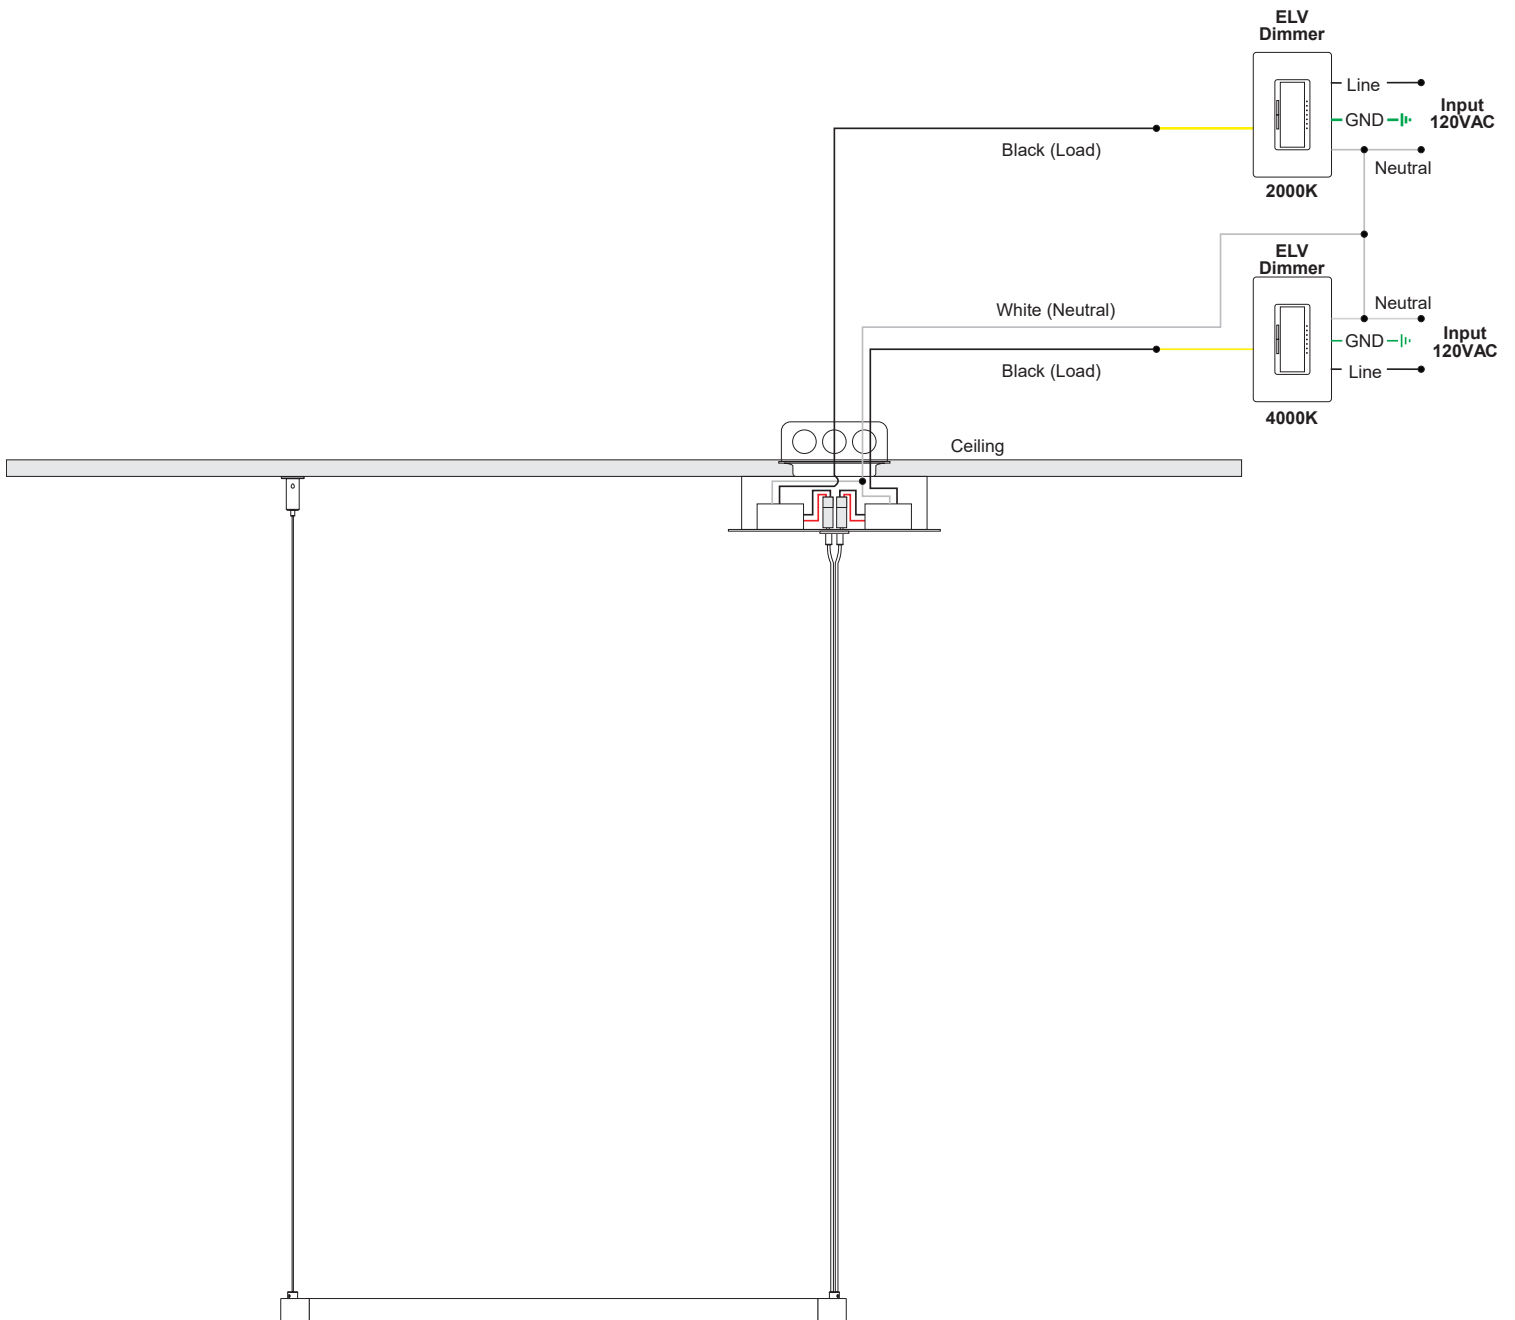

|         |  |              |  |      |  |
|---------|--|--------------|--|------|--|
| PROJECT |  | FIXTURE TYPE |  | DATE |  |
|---------|--|--------------|--|------|--|

# CIRRUS MIYO (MAKE IT YOUR OWN) SQUARE WARM DIM LED SUSPENSION WITH POWER

REV.05.14.18

DESIGNED BY GREGORY KAY | MADE IN USA



**FJ-SCO-1-PN**  
Fast Jack Scope LED  
9W, 315 lumens 3000K  
(adjustable beam spread  
from 20°-50°)  
Fixture Finishes: SN, PN, BZ, WH



**FJ-PST-SP-1-30K-SN**  
Fast Jack Piston  
9W, 650 lumens  
SP 15°, NF 25°, FL 35°  
& WF 45° Beam Spreads  
Fixture Finishes: SN, PN, WH



**FJ-FOR-SQ-3-PN**  
**FJ-FOR-RD-3-PN**  
Fast Jack Form Round or Square  
Fixture Finishes: SN, PN



**FJ-FOR-2RD-3-SN**  
**FJ-FOR-2SQ-3-SN**  
Fast Jack Form  
Round or Square 2-Head  
Fixture Finishes: SN, PN



**FJ-REB-1-PN**  
Fast Jack Rebel  
Fixture Finishes: SN, PN, BZ, WH



**FJ-CHO-1-SN**  
Fast Jack Chopper with LED  
Fixture Finishes: SN, PN, BZ



**FJ-SPI-3-PN with S1-PN**  
Fast Jack Spirit, S1 Shade  
Fixture Finishes: SN, PN, BZ  
S1 Shade Finishes: SN, PN, BZ, BK



**FJ-LOW-1-SN with S1-SN**  
Fast Jack Low Rider, S1 Shade  
Fixture Finishes: SN, PN, BZ  
S1 Shade Finishes: SN, PN, BZ, BK

## FAST JACK FIXTURE & SHADE FINISHES

|                        |                           |                          |                 |                 |
|------------------------|---------------------------|--------------------------|-----------------|-----------------|
| <b>SN</b> Satin Nickel | <b>PN</b> Polished Nickel | <b>BZ</b> Antique Bronze | <b>WH</b> White | <b>BK</b> Black |
|------------------------|---------------------------|--------------------------|-----------------|-----------------|

### 2700K MR16 12V LED LAMPS

| BRAND                       | SORAA               |                     |                     | TCP                |                   | GREEN CREATIVE       |                      |                      |
|-----------------------------|---------------------|---------------------|---------------------|--------------------|-------------------|----------------------|----------------------|----------------------|
|                             |                     |                     |                     |                    |                   |                      |                      |                      |
| <b>ORDERING CODE</b>        | SMT16-07-10D-927-03 | SMT16-09-25D-927-03 | SMT16-09-36D-927-03 | LED712VMR16927KNFL | LED712VMR16927KFL | 7.5MR16G4DIM/927SP15 | 7.5MR16G4DIM/927NF25 | 7.5MR16G4DIM/927FL36 |
| <b>CRI</b>                  | 95                  | 95                  | 95                  | 92                 | 92                | 92                   | 92                   | 92                   |
| <b>BEAM ANGLE (DEGREES)</b> | 10                  | 25                  | 36                  | 20                 | 40                | 15                   | 25                   | 36                   |
| <b>TOTAL LUMENS</b>         | 390                 | 465                 | 465                 | 425                | 425               | 410                  | 485                  | 485                  |
| <b>LUMENS PER WATT</b>      | 52                  | 52                  | 52                  | 61                 | 61                | 55                   | 63                   | 63                   |
| <b>HALOGEN EQUIVALENT</b>   | 50                  | 60                  | 60                  | 50                 | 50                | 75                   | 75                   | 75                   |

### 3000K MR16 12V LED LAMPS

| BRAND                       | SORAA               |                     |                     | TCP                |                   | GREEN CREATIVE       |                      |                      |
|-----------------------------|---------------------|---------------------|---------------------|--------------------|-------------------|----------------------|----------------------|----------------------|
|                             |                     |                     |                     |                    |                   |                      |                      |                      |
| <b>ORDERING CODE</b>        | SMT16-07-10D-930-03 | SMT16-09-25D-930-03 | SMT16-09-36D-930-03 | LED712VMR16930KNFL | LED712VMR16930KFL | 7.5MR16G4DIM/930SP15 | 7.5MR16G4DIM/930NF25 | 7.5MR16G4DIM/930FL36 |
| <b>CRI</b>                  | 95                  | 95                  | 95                  | 92                 | 92                | 92                   | 92                   | 92                   |
| <b>BEAM ANGLE (DEGREES)</b> | 10                  | 25                  | 36                  | 20                 | 40                | 15                   | 25                   | 36                   |
| <b>TOTAL LUMENS</b>         | 410                 | 490                 | 490                 | 425                | 425               | 430                  | 505                  | 505                  |
| <b>LUMENS PER WATT</b>      | 55                  | 54                  | 54                  | 61                 | 61                | 57                   | 66                   | 66                   |
| <b>HALOGEN EQUIVALENT</b>   | 50                  | 60                  | 60                  | 50                 | 50                | 75                   | 75                   | 75                   |

|         |              |      |
|---------|--------------|------|
| PROJECT | FIXTURE TYPE | DATE |
|---------|--------------|------|

CIRRUS MIYO (MAKE IT YOUR OWN) SQUARE WARM DIM LED SUSPENSION WITH POWER

REV.05.14.18

DESIGNED BY GREGORY KAY | MADE IN USA

**Pendants:** Various Pendants available for the Cirrus MiYO Fast Jack



**FJ-DROP2-12-SN WITH S1-SN**  
Fast Jack Drop 2  
Fixture Finishes: SN



**FJ-BBCL-10FT-12-SN**  
Fast Jack Bubble Ball  
Fixture Finishes: SN



**FJ-EVE-PL-12-SN**  
Fast Jack Everest  
Color: Clear(CL), Platinum(PL)  
Fixture Finishes: SN, PN, BZ



**FJ-TOL-CS-12-SN-TCRY**  
Fast Jack Tower of Crystal Love  
Color: Clear Satin Frost(CS)  
Fixture Finishes: SN, PN, BZ



**FJ-ICE-12-SN**  
Fast Jack Ice  
Fixture Finishes: SN, PN, BZ



**FJ-K2-12-SN**  
Fast Jack K2  
Fixture Finishes: SN



**FJ-LPIP-12-SN**  
Fast Jack LED Pipe  
Fixture Finishes: SN



**FJ-SALUTI-LG-L1-CR-SN**  
Fast Jack Saluti  
Size: 3"(SM), 4"(MD), 5.5"(LG)  
Glass Color: Cristallo(CR), Gray(GY)  
Fixture Finishes: SN, PN, BZ



**FJ-SCLP-12-SN**  
Fast Jack Scope LED  
Fixture Finishes: SN, PN, BZ

Lamps included with all pendants shown above  
For more lamp data see product spec sheets on [www.PureEdgeLighting.com](http://www.PureEdgeLighting.com)

|         |  |              |  |      |  |
|---------|--|--------------|--|------|--|
| PROJECT |  | FIXTURE TYPE |  | DATE |  |
|---------|--|--------------|--|------|--|

CIRRUS MIYO (MAKE IT YOUR OWN) SQUARE WARM DIM LED SUSPENSION WITH POWER


REV.05.14.18 DESIGNED BY GREGORY KAY | MADE IN USA

**TM-30-15 DATA**

The data below is for SS5C bare LED Soft Strips. Consistent color temperatures throughout a single strip and among multiple strips is possible through a 3 phase binning process in which each order is inspected with a color meter to ensure uniformity.

**2200K | Rf: 83.9 | Rg: 94.9**

COLOR VECTOR GRAPHIC




■ Test ■ Reference

| HUE BIN | Rf   | GRAPHIC SHIFTS % |        |
|---------|------|------------------|--------|
|         |      | CHROMA           | HUE    |
| 1       | 77.6 | -10.0%           | 1.8%   |
| 2       | 80.7 | -7.5%            | 7.0%   |
| 3       | 79.5 | -2.9%            | 8.9%   |
| 4       | 90.5 | -3.1%            | 2.4%   |
| 5       | 93.9 | -1.3%            | 1.9%   |
| 6       | 91.9 | -0.9%            | -0.2%  |
| 7       | 87.6 | -6.3%            | -2.7%  |
| 8       | 90.5 | -5.4%            | 2.7%   |
| 9       | 83.8 | -4.7%            | 6.5%   |
| 10      | 81.2 | -2.5%            | 10.0%  |
| 11      | 83.3 | 3.9%             | 9.4%   |
| 12      | 86.4 | 5.6%             | 2.6%   |
| 13      | 86.2 | 4.5%             | -12.4% |
| 14      | 64.3 | -1.0%            | -21.9% |
| 15      | 85.1 | -4.4%            | -7.5%  |
| 16      | 75.0 | -9.9%            | -12.0% |

**2700K | Rf: 87.7 | Rg: 96.1**

COLOR VECTOR GRAPHIC




■ Test ■ Reference

| HUE BIN | Rf   | GRAPHIC SHIFTS % |        |
|---------|------|------------------|--------|
|         |      | CHROMA           | HUE    |
| 1       | 86.4 | -5.6%            | 2.3%   |
| 2       | 89.7 | -3.3%            | 3.1%   |
| 3       | 90.5 | -1.5%            | 3.8%   |
| 4       | 90.0 | -4.3%            | 1.1%   |
| 5       | 92.9 | -3.7%            | 0.2%   |
| 6       | 93.5 | -2.5%            | -0.8%  |
| 7       | 86.3 | -7.2%            | 2.5%   |
| 8       | 90.7 | -4.0%            | 3.2%   |
| 9       | 85.2 | -2.4%            | 8.1%   |
| 10      | 81.7 | 0.9%             | 10.8%  |
| 11      | 85.4 | 4.5%             | 8.9%   |
| 12      | 88.7 | 5.7%             | -1.4%  |
| 13      | 88.3 | 1.3%             | -7.9%  |
| 14      | 85.1 | 2.4%             | -10.4% |
| 15      | 88.1 | -4.8%            | -2.7%  |
| 16      | 81.7 | -4.3%            | -10.9% |

**3000K | Rf: 88.1 | Rg: 99.7**

COLOR VECTOR GRAPHIC




■ Test ■ Reference

| HUE BIN | Rf   | GRAPHIC SHIFTS % |        |
|---------|------|------------------|--------|
|         |      | CHROMA           | HUE    |
| 1       | 87.7 | -5.9%            | -0.3%  |
| 2       | 87.9 | -4.4%            | 4.3%   |
| 3       | 82.9 | -1.2%            | 7.9%   |
| 4       | 89.9 | 0.6%             | 4.7%   |
| 5       | 92.7 | 3.0%             | 3.5%   |
| 6       | 92.7 | 3.6%             | -1.7%  |
| 7       | 90.8 | -1.3%            | -4.4%  |
| 8       | 93.7 | -2.5%            | -2.2%  |
| 9       | 91.7 | -3.7%            | 2.3%   |
| 10      | 85.5 | -2.8%            | 7.8%   |
| 11      | 83.3 | 0.7%             | 11.0%  |
| 12      | 86.4 | 5.5%             | 3.8%   |
| 13      | 90.6 | 4.6%             | -3.6%  |
| 14      | 85.6 | 5.9%             | -8.4%  |
| 15      | 89.5 | -0.6%            | -5.7%  |
| 16      | 82.6 | -2.7%            | -12.0% |

**3500K | Rf: 86.1 | Rg: 95.5**

COLOR VECTOR GRAPHIC




■ Test ■ Reference

| HUE BIN | Rf   | GRAPHIC SHIFTS % |        |
|---------|------|------------------|--------|
|         |      | CHROMA           | HUE    |
| 1       | 86.6 | -4.2%            | 3.4%   |
| 2       | 91.7 | -1.4%            | 1.8%   |
| 3       | 94.9 | -0.7%            | 0.4%   |
| 4       | 87.9 | -4.5%            | -4.1%  |
| 5       | 85.9 | -10.3%           | -2.7%  |
| 6       | 89.8 | -5.2%            | -0.4%  |
| 7       | 79.6 | -9.5%            | 6.5%   |
| 8       | 87.6 | -4.0%            | 5.7%   |
| 9       | 81.4 | -0.5%            | 11.8%  |
| 10      | 78.3 | 3.3%             | 11.4%  |
| 11      | 85.7 | 6.3%             | 6.1%   |
| 12      | 86.3 | 7.1%             | -4.6%  |
| 13      | 86.1 | -0.7%            | -9.6%  |
| 14      | 85.1 | 0.8%             | -10.4% |
| 15      | 83.4 | -4.1%            | -5.3%  |
| 16      | 82.5 | -3.6%            | -5.7%  |

**4000K | Rf: 87.6 | Rg: 96.8**

COLOR VECTOR GRAPHIC




■ Test ■ Reference

| HUE BIN | Rf   | GRAPHIC SHIFTS % |       |
|---------|------|------------------|-------|
|         |      | CHROMA           | HUE   |
| 1       | 89.0 | -3.1%            | 2.1%  |
| 2       | 93.2 | -0.9%            | 1.3%  |
| 3       | 94.3 | -1.1%            | 0.7%  |
| 4       | 89.5 | -4.0%            | -2.3% |
| 5       | 87.6 | -7.8%            | -1.8% |
| 6       | 92.2 | -4.6%            | 0.1%  |
| 7       | 87.4 | -6.6%            | 3.6%  |
| 8       | 85.7 | -3.8%            | 7.0%  |
| 9       | 81.5 | -1.3%            | 12.4% |
| 10      | 80.0 | 0.9%             | 11.4% |
| 11      | 83.3 | 5.9%             | 8.7%  |
| 12      | 89.7 | 4.8%             | -0.3% |
| 13      | 88.5 | 2.4%             | -6.3% |
| 14      | 92.7 | 4.0%             | -3.8% |
| 15      | 86.1 | -1.6%            | -4.5% |
| 16      | 85.0 | -1.4%            | -5.0% |

**5700K | Rf: 80.3 | Rg: 91.5**

COLOR VECTOR GRAPHIC



■ Test ■ Reference

| HUE BIN | Rf   | GRAPHIC SHIFTS % |        |
|---------|------|------------------|--------|
|         |      | CHROMA           | HUE    |
| 1       | 73.8 | -11.2%           | 2.6%   |
| 2       | 83.7 | -5.5%            | 5.8%   |
| 3       | 84.2 | -4.0%            | 5.5%   |
| 4       | 85.8 | -3.5%            | 1.3%   |
| 5       | 85.3 | -7.1%            | 0.6%   |
| 6       | 89.2 | -5.8%            | -2.2%  |
| 7       | 81.5 | -10.7%           | 1.2%   |
| 8       | 75.7 | -9.7%            | 8.5%   |
| 9       | 74.9 | -7.8%            | 18.8%  |
| 10      | 67.8 | -1.6%            | 18.0%  |
| 11      | 76.1 | 5.5%             | 12.0%  |
| 12      | 90.8 | 4.9%             | -1.6%  |
| 13      | 83.6 | 5.0%             | -9.5%  |
| 14      | 81.7 | -1.2%            | -10.0% |
| 15      | 69.0 | 2.0%             | -22.8% |
| 16      | 83.2 | -8.5%            | -1.0%  |

|         |              |      |
|---------|--------------|------|
| PROJECT | FIXTURE TYPE | DATE |
|---------|--------------|------|

# CIRRUS MIYO (MAKE IT YOUR OWN) SQUARE WARM DIM LED SUSPENSION WITH POWER


REV.05.14.18 DESIGNED BY GREGORY KAY | MADE IN USA

## TM-30-15 DATA

The data below is for SS5C bare LED Soft Strips. Consistent color temperatures throughout a single strip and among multiple strips is possible through a 3 phase binning process in which each order is inspected with a color meter to ensure uniformity.

### 2700D | Rf: 89.5 | Rg: 100.8

COLOR VECTOR GRAPHIC




■ Test ■ Reference

| HUE BIN | Rf   | GRAPHIC SHIFTS % |        |
|---------|------|------------------|--------|
|         |      | CHROMA           | HUE    |
| 1       | 88.8 | -5.1%            | 1.4%   |
| 2       | 89.8 | -2.7%            | 4.1%   |
| 3       | 87.2 | 0.3%             | 5.9%   |
| 4       | 92.3 | -0.9%            | 1.0%   |
| 5       | 93.3 | 1.5%             | 1.7%   |
| 6       | 92.4 | 3.6%             | -0.2%  |
| 7       | 92.2 | -0.9%            | -2.4%  |
| 8       | 96.7 | -0.4%            | -1.1%  |
| 9       | 92.3 | -1.2%            | 3.7%   |
| 10      | 88.9 | -0.0%            | 6.1%   |
| 11      | 86.4 | 5.1%             | 7.4%   |
| 12      | 88.2 | 6.3%             | -0.9%  |
| 13      | 87.2 | 3.8%             | -8.1%  |
| 14      | 84.2 | 3.8%             | -11.0% |
| 15      | 89.8 | -2.6%            | -4.3%  |
| 16      | 82.7 | -3.4%            | -11.1% |

### 3000D | Rf: 89.8 | Rg: 101.4

COLOR VECTOR GRAPHIC




■ Test ■ Reference

| HUE BIN | Rf   | GRAPHIC SHIFTS % |        |
|---------|------|------------------|--------|
|         |      | CHROMA           | HUE    |
| 1       | 90.2 | -4.2%            | 1.5%   |
| 2       | 90.9 | -2.0%            | 3.7%   |
| 3       | 87.9 | 0.8%             | 5.5%   |
| 4       | 92.1 | -0.9%            | 0.6%   |
| 5       | 93.0 | 1.5%             | 1.6%   |
| 6       | 92.2 | 3.9%             | -0.2%  |
| 7       | 92.1 | -0.3%            | -2.0%  |
| 8       | 96.7 | 0.0%             | -1.2%  |
| 9       | 92.5 | -0.6%            | 3.7%   |
| 10      | 88.3 | 1.1%             | 7.0%   |
| 11      | 87.2 | 4.1%             | 7.4%   |
| 12      | 87.2 | 6.7%             | -1.0%  |
| 13      | 88.2 | 3.8%             | -7.2%  |
| 14      | 85.3 | 4.3%             | -9.9%  |
| 15      | 90.9 | -2.2%            | -3.6%  |
| 16      | 83.4 | -2.2%            | -11.2% |

## TUNABLE WHITE: 2000K - 4000K

### 2000K only (2K4K) | Rf: 84.8 | Rg: 97.9

COLOR VECTOR GRAPHIC




■ Test ■ Reference

| HUE BIN | Rf   | GRAPHIC SHIFTS % |        |
|---------|------|------------------|--------|
|         |      | CHROMA           | HUE    |
| 1       | 81.1 | -8.7%            | 1.2%   |
| 2       | 79.8 | -6.9%            | 7.9%   |
| 3       | 78.5 | -2.6%            | 10.3   |
| 4       | 88.9 | 1.3%             | 6.2%   |
| 5       | 94.7 | 3.2%             | 2.2%   |
| 6       | 91.4 | 4.1%             | -0.7%  |
| 7       | 88.1 | -1.1%            | -7.1%  |
| 8       | 90.3 | -5.4%            | -2.6%  |
| 9       | 88.3 | -4.8%            | 2.6%   |
| 10      | 84.1 | -3.8%            | 7.7%   |
| 11      | 84.8 | 2.3%             | 8.8%   |
| 12      | 86.2 | 4.8%             | 3.4%   |
| 13      | 86.0 | 6.4%             | -12.2% |
| 14      | 62.1 | -1.0%            | -18.9% |
| 15      | 79.8 | -2.7%            | -13.1% |
| 16      | 79.1 | -7.8%            | -10.4% |

### 4000K only (2K4K) | Rf: 89.6 | Rg: 99.1 | CRI: 87

COLOR VECTOR GRAPHIC




■ Test ■ Reference

| HUE BIN | Rf   | GRAPHIC SHIFTS % |       |
|---------|------|------------------|-------|
|         |      | CHROMA           | HUE   |
| 1       | 91.3 | -2.5%            | 1.0%  |
| 2       | 95.3 | -0.5%            | 0.5%  |
| 3       | 94.3 | -0.7%            | 1.1%  |
| 4       | 91.1 | -3.4%            | -1.1% |
| 5       | 89.5 | -5.6%            | 0.0%  |
| 6       | 94.6 | -1.4%            | 1.3%  |
| 7       | 93.2 | -3.0%            | 2.6%  |
| 8       | 91.3 | -1.8%            | 4.6%  |
| 9       | 86.5 | -0.9%            | 9.1%  |
| 10      | 83.3 | -0.5%            | 9.5%  |
| 11      | 83.3 | 4.9%             | 9.0%  |
| 12      | 89.7 | 4.1%             | 1.7%  |
| 13      | 90.1 | 3.6%             | -4.3% |
| 14      | 93.4 | 5.2%             | -2.1% |
| 15      | 87.4 | 0.4%             | -4.3% |
| 16      | 86.6 | 0.4%             | -6.1% |

### 2K4K (3000K) | Rf: 90.2 | Rg: 101.4 | CRI: 90+

COLOR VECTOR GRAPHIC



■ Test ■ Reference

| HUE BIN | Rf   | GRAPHIC SHIFTS % |        |
|---------|------|------------------|--------|
|         |      | CHROMA           | HUE    |
| 1       | 90.9 | -3.8%            | 1.3%   |
| 2       | 91.7 | -1.9%            | 3.3%   |
| 3       | 88.7 | 0.7%             | 5.1%   |
| 4       | 92.4 | -1.0%            | 0.7%   |
| 5       | 92.9 | 0.9%             | 1.7%   |
| 6       | 93.1 | 3.3%             | -0.6%  |
| 7       | 91.0 | -1.8%            | -0.4%  |
| 8       | 97.0 | 0.2%             | -1.1%  |
| 9       | 92.8 | -0.5%            | 3.6%   |
| 10      | 88.3 | 1.0%             | 7.0%   |
| 11      | 87.1 | 3.8%             | 7.8%   |
| 12      | 87.6 | 6.5%             | -0.3%  |
| 13      | 89.3 | 3.6%             | -6.3%  |
| 14      | 86.1 | 4.5%             | -9.1%  |
| 15      | 91.6 | -1.9%            | -3.1%  |
| 16      | 83.8 | -1.5%            | -11.2% |

|         |              |      |
|---------|--------------|------|
| PROJECT | FIXTURE TYPE | DATE |
|---------|--------------|------|