
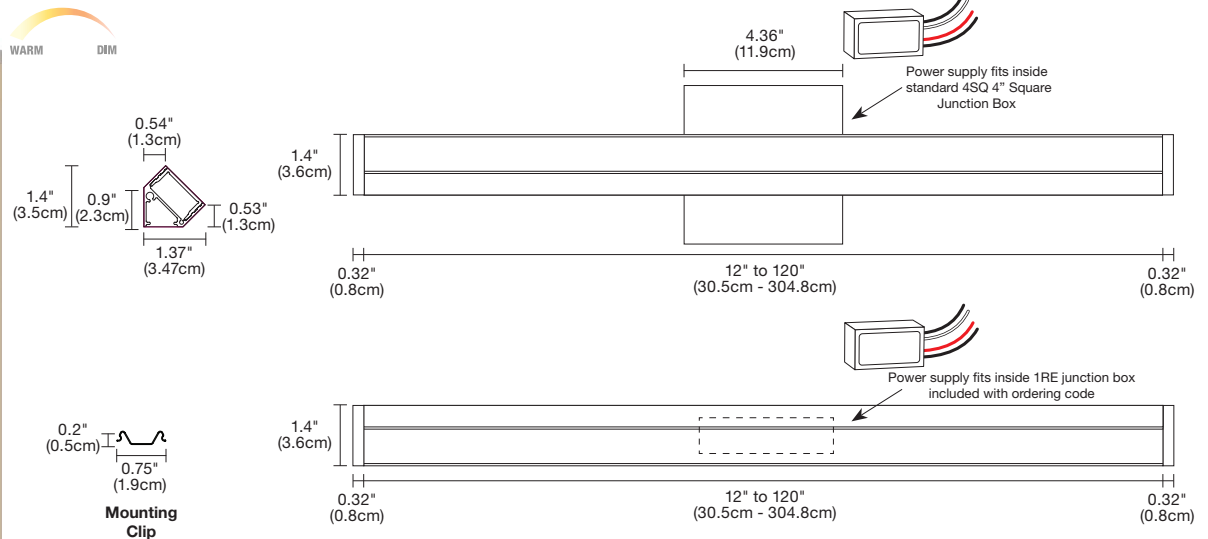


AUDREY LED VANITY

24VDC HORIZONTAL OR VERTICAL WITH WARM DIM TECHNOLOGY OPTION

DESIGNED BY GREGORY KAY | ASSEMBLED IN AMERICA


Rev.10.18.19

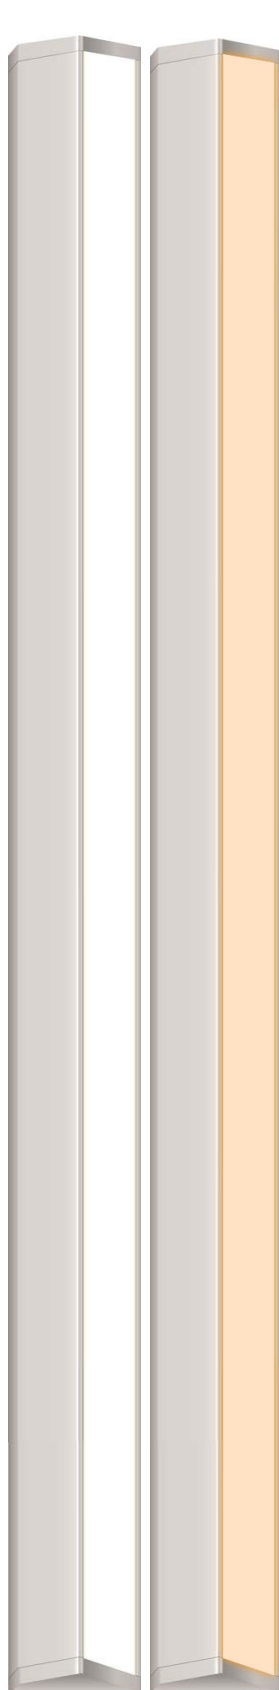

DESCRIPTION:

Audrey features a milky white diffuser lens that provides uniform light without hotspots. At 5 watts per foot, the 24 Volt DC Vanity contains high CRI white LEDs for excellent color rendering. Warm Dim options are 2700K (27D) or 3000K (30D) at 100% and dim to 2200K. Audrey is available in various increments from 12 inches up to 120 inches, 60 inch max length for Warm Dim 10 watt. Fixture uses a 24VDC Class 2 electronic low voltage LED power supply (included). Power supply fits inside a standard square 4" electrical box with round plaster ring and floating split canopy (4SQ), or the Slim Profile Junction Box (1RE) which hides any mounting hardware. Audrey is dimmable with an electronic low voltage dimmer. ETL Listed, Damp Rated, Warm Dim Technology. Pro-Rated 5 Year Warranty. For custom design and layout assistance, send drawings to design@PureEdgeLighting.com. Designed By Gregory Kay

FINISH:



APPLICATIONS:

Indoor Only - Hospitality, Hotels, Residential and Commercial Bathroom Vanity, Beauty Salons, Commercial Real Estate, Retail Store Front, Changing Rooms and Closets.

POWER SUPPLY:

120V input, 24VDC Class 2 output; electronic low voltage LED power supply (included) fits inside standard junction box

DIMMING:

Dimmable with electronic low voltage dimmer:

Legrand, Adorne ADTP703TU; Lutron: Diva DVELV-300P, Skylark SELV-300P, Maestro MAELV-600 and Radio Ra 2 dimmers recommended

Product	Canopy	Length In Inches	Color Temperature	Finish
AV2	4SQ	12IN	27K	SA
AV2 Audrey Vanity 24VDC	4SQ 4" Square 1RE 1" Rectangle with Junction Box	12-120 Order in various increments from 12 inches up to 120 inches Chrome max 84" Warm Dim (27D, 30D) 60" Max Length	22K 2200K Candle White 24K 2400K Very Warm White 27K 2700K Warm White 27D 2700K Warm Dim* 30K 3000K Soft White 30D 3000K Warm Dim* 35K 3500K Neutral White 40K 4000K Cool White 57K 5700K Daylight White	SA Satin Aluminum SN Satin Nickel CH Chrome (Max 84") BZ Antique Bronze BK Satin Black WH White

PROJECT	FIXTURE TYPE	DATE
---------	--------------	------



AUDREY LED VANITY

24VDC HORIZONTAL OR VERTICAL WITH WARM DIM TECHNOLOGY OPTION



DESIGNED BY GREGORY KAY | ASSEMBLED IN AMERICA

Rev.10.18.19

Nominal Lamp Data: Lamp data for the Audrey Vanity

AV2										
AUDREY VANITY - STATIC WHITE / WARM DIM										
DESCRIPTION										
WATTS PER FOOT	5w (4.4 watts)									
COLOR TEMPERATURE		22K	24K	27K	27D	30K	30D	35K	40K	57K
LUMENS PER FOOT (lm/ft)	lm/ft	261	290	319	324	348	354	398	433	461
LUMENS PER WATT (lm/w)	lm/w	59	66	72	67	79	74	90	98	105
CRI	CRI	85+	90+	95+	95+	95+	95+	90+	90+	85+

Length Chart: Actual lengths for Audrey Vanity.

22K, 27K, 30K, 35K, 40K & 57K					
ORDERING CODE (NOMINAL SIZE)	ACTUAL LENGTH (INCHES)	TOTAL WATTAGE	ORDERING CODE (NOMINAL SIZE)	ACTUAL LENGTH (INCHES)	TOTAL WATTAGE
12in	39.5	5W	68in	68.3	29W
15in	41.9	7W	70in	70.7	30W
17in	44.3	8W	72in	73.1	30W
20in	46.7	9W	75in	75.5	32W
22in	49.1	10W	77in	77.9	33W
24in	51.5	10W	80in	80.3	34W
27in	53.9	12W	82in	82.7	35W
29in	56.3	13W	84in	85.1	35W
32in	58.7	14W	87in	87.5	37W
34in	61.1	15W	89in	89.9	38W
36in	37.1	15W	82in	92.3	39W
39in	39.5	17W	84in	94.7	40W
41in	41.9	18W	86in	97.1	40W
44in	44.3	19W	99in	99.5	42W
46in	46.7	20W	101in	101.9	43W
48in	49.1	20W	104in	104.3	44W
51in	51.5	22W	106in	106.7	45W
53in	53.9	23W	108in	109.1	45W
56in	56.3	24W	111in	111.5	47W
58in	58.7	25W	113in	113.9	48W
60in	61.1	25W	116in	116.3	49W
63in	63.5	27W	118in	118.7	50W
65in	65.9	28W	120in	121.1	50W

27D & 30D					
ORDERING CODE (NOMINAL SIZE)	ACTUAL LENGTH (INCHES)	TOTAL WATTAGE	ORDERING CODE (NOMINAL SIZE)	ACTUAL LENGTH (INCHES)	TOTAL WATTAGE
12in	13.1	10W	39in	39.5	33W
15in	15.5	13W	41in	41.9	35W
17in	17.9	15W	44in	44.3	37W
20in	20.3	17W	46in	46.7	39W
22in	22.7	19W	48in	49.1	40W
24in	25.1	20W	51in	51.5	43W
27in	27.5	23W	53in	53.9	45W
29in	29.9	25W	56in	56.3	47W
32in	32.3	27W	58in	58.7	49W
34in	34.7	29W	60in	61.1	50W
36in	37.1	30W			

PROJECT		FIXTURE TYPE		DATE	
---------	--	--------------	--	------	--



AUDREY LED VANITY

24VDC HORIZONTAL OR VERTICAL WITH WARM DIM TECHNOLOGY OPTION



DESIGNED BY GREGORY KAY | ASSEMBLED IN AMERICA


Rev.10.18.19

Wiring Diagram: Audrey Vanity with ELV dimming

Application: ELV Dimming with an ELV Power Supply and ELV Dimmer for Audrey Vanity

Power Supply: Class 2, 24VDC output: 120VAC input, PS-60L-ELV-24VDC

Dimming: Dimmable with ELV Dimmers using power supplies above: Legrand, Adorne ADTP703TU; Lutron: Diva DVELV-300P, Skylark SELV-300P, Maestro MAELV-600 and Radio Ra 2.

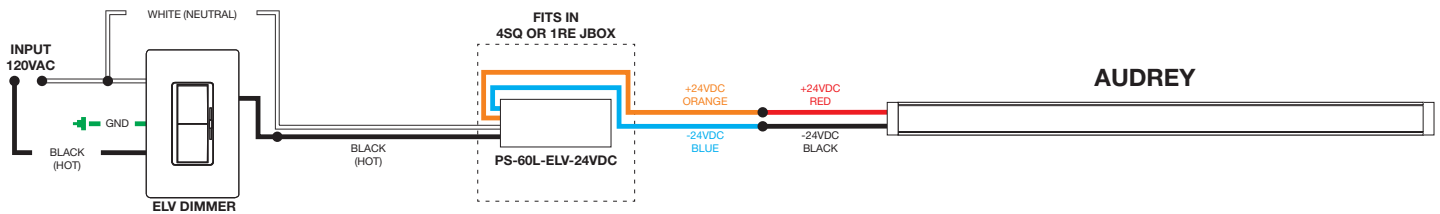

PROJECT		FIXTURE TYPE		DATE	
---------	--	--------------	--	------	--



AUDREY LED VANITY

24VDC HORIZONTAL OR VERTICAL WITH WARM DIM TECHNOLOGY OPTION




DESIGNED BY GREGORY KAY | ASSEMBLED IN AMERICA

Rev.10.18.19

Wiring Diagram: Audrey Vanity with ELV dimming

- Application:** Electronic low voltage dimming for Audrey Vanity
- Power Supply:** 120V input, 24VDC class 2 output; electronic low voltage LED power supply (included) that fits inside standard junction box
- Dimming:** Dimmable with electronic low voltage dimmer: Legrand, Adorne ADTP703TU; Lutron: Diva DVELV-300P, Skylark SELV-300P, Maestro MAELV-600 and Radio Ra 2 dimmers recommended

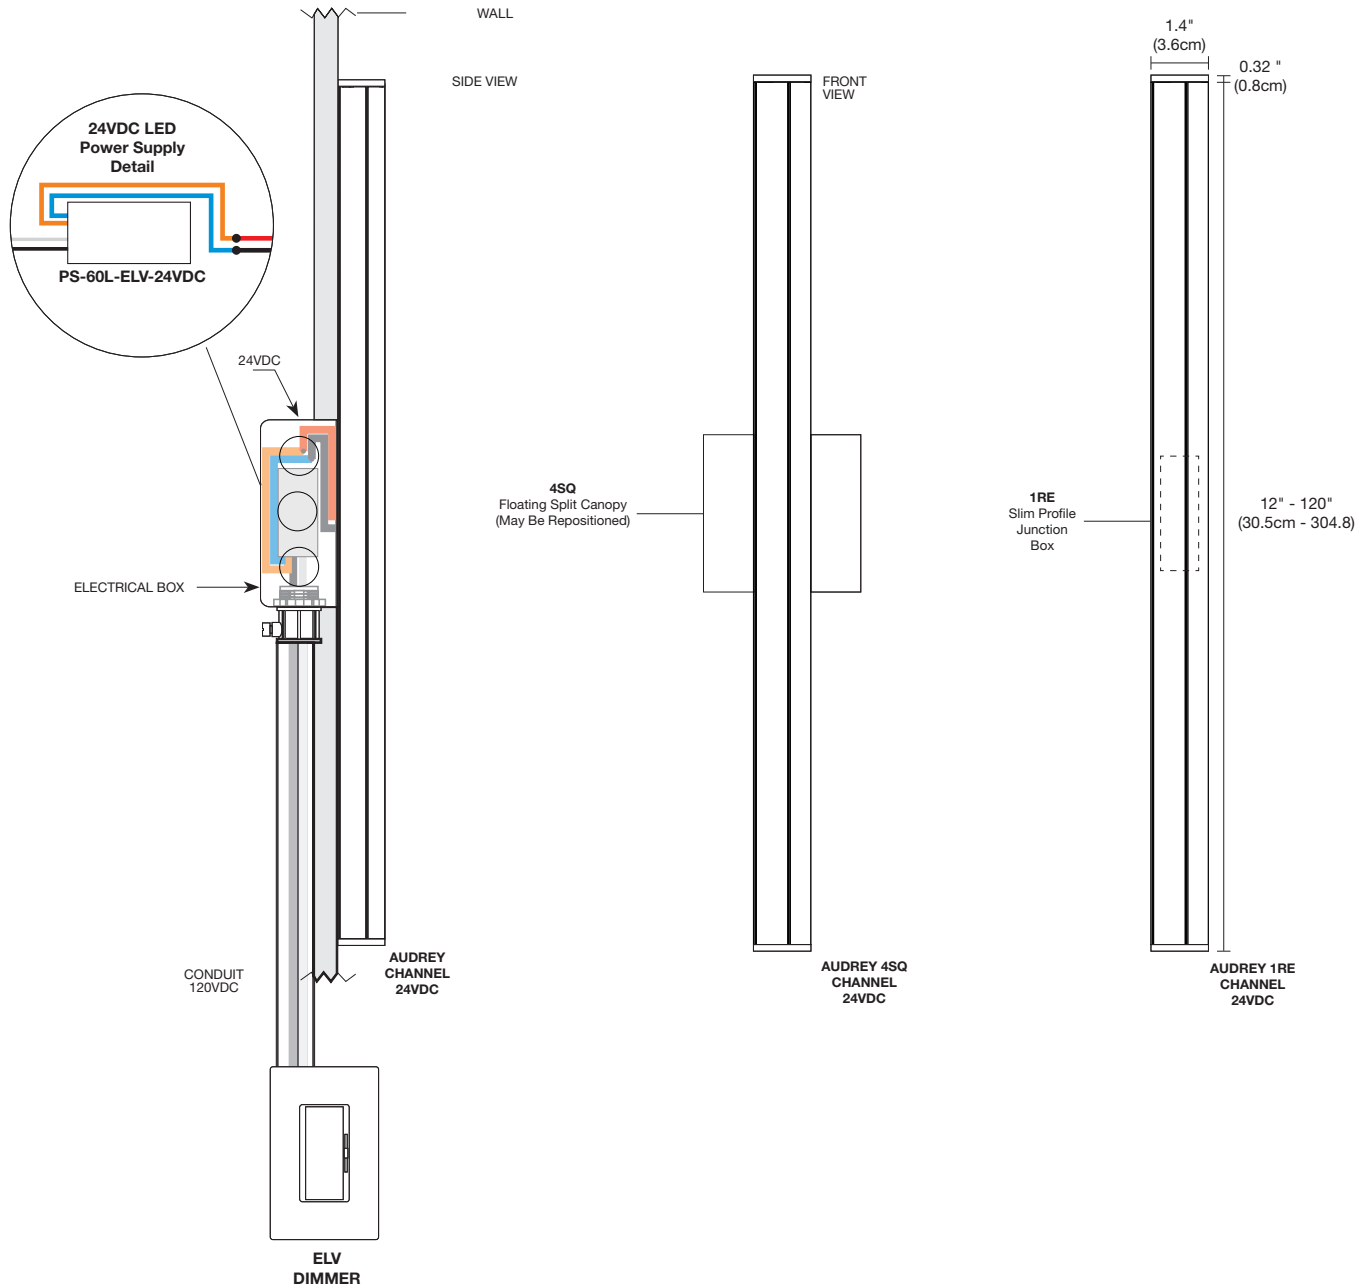


PROJECT	FIXTURE TYPE	DATE
---------	--------------	------

TM-30-15 DATA: The data below is for SS2C, SS5C, SS7C and SS10C bare LED Soft Strips. Consistent color temperatures throughout a single strip and among multiple strips is possible through a 3 phase binning process in which each order is inspected with a color meter to ensure uniformity.

2200K | Rf: 83.9 | Rg: 94.9 | CRI: 85+

COLOR VECTOR GRAPHIC




■ Test ■ Reference

HUE BIN	Rf	GRAPHIC SHIFTS %	
		CHROMA	HUE
1	77.6	-10.0%	1.8%
2	80.7	-7.5%	7.0%
3	79.5	-2.9%	8.9%
4	90.5	-3.1%	2.4%
5	93.9	-1.3%	1.9%
6	91.9	-0.9%	-0.2%
7	87.6	-6.3%	-2.7%
8	90.5	-5.4%	2.7%
9	83.8	-4.7%	6.5%
10	81.2	-2.5%	10.0%
11	83.3	3.9%	9.4%
12	86.4	5.6%	2.6%
13	86.2	4.5%	-12.4%
14	64.3	-1.0%	-21.9%
15	85.1	-4.4%	-7.5%
16	75.0	-9.9%	-12.0%

2700K | Rf: 87.7 | Rg: 96.1 | CRI: 95+

COLOR VECTOR GRAPHIC




■ Test ■ Reference

HUE BIN	Rf	GRAPHIC SHIFTS %	
		CHROMA	HUE
1	86.4	-5.6%	2.3%
2	89.7	-3.3%	3.1%
3	90.5	-1.5%	3.8%
4	90.0	-4.3%	1.1%
5	92.9	-3.7%	0.2%
6	93.5	-2.5%	-0.8%
7	86.3	-7.2%	2.5%
8	90.7	-4.0%	3.2%
9	85.2	-2.4%	8.1%
10	81.7	0.9%	10.8%
11	85.4	4.5%	8.9%
12	88.7	5.7%	-1.4%
13	88.3	1.3%	-7.9%
14	85.1	2.4%	-10.4%
15	88.1	-4.8%	-2.7%
16	81.7	-4.3%	-10.9%

3000K | Rf: 88.1 | Rg: 99.7 | CRI: 95+

COLOR VECTOR GRAPHIC




■ Test ■ Reference

HUE BIN	Rf	GRAPHIC SHIFTS %	
		CHROMA	HUE
1	87.7	-5.9%	-0.3%
2	87.9	-4.4%	4.3%
3	82.9	-1.2%	7.9%
4	89.9	0.6%	4.7%
5	92.7	3.0%	3.5%
6	92.7	3.6%	-1.7%
7	90.8	-1.3%	-4.4%
8	93.7	-2.5%	-2.2%
9	91.7	-3.7%	2.3%
10	85.5	-2.8%	7.8%
11	83.3	0.7%	11.0%
12	86.4	5.5%	3.8%
13	90.6	4.6%	-3.6%
14	85.6	5.9%	-8.4%
15	89.5	-0.6%	-5.7%
16	82.6	-2.7%	-12.0%

3500K | Rf: 86.1 | Rg: 95.5 | CRI: 85+

COLOR VECTOR GRAPHIC




■ Test ■ Reference

HUE BIN	Rf	GRAPHIC SHIFTS %	
		CHROMA	HUE
1	86.6	-4.2%	3.4%
2	91.7	-1.4%	1.8%
3	94.9	-0.7%	0.4%
4	87.9	-4.5%	-4.1%
5	85.9	-10.3%	-2.7%
6	89.8	-5.2%	-0.4%
7	79.6	-9.5%	6.5%
8	87.6	-4.0%	5.7%
9	81.4	-0.5%	11.8%
10	78.3	3.3%	11.4%
11	85.7	6.3%	6.1%
12	86.3	7.1%	-4.6%
13	86.1	-0.7%	-9.6%
14	85.1	0.8%	-10.4%
15	83.4	-4.1%	-5.3%
16	82.5	-3.6%	-5.7%

4000K | Rf: 87.6 | Rg: 96.8 | CRI: 84

COLOR VECTOR GRAPHIC




■ Test ■ Reference

HUE BIN	Rf	GRAPHIC SHIFTS %	
		CHROMA	HUE
1	89.0	-3.1%	2.1%
2	93.2	-0.9%	1.3%
3	94.3	-1.1%	0.7%
4	89.5	-4.0%	-2.3%
5	87.6	-7.8%	-1.8%
6	92.2	-4.6%	0.1%
7	87.4	-6.6%	3.6%
8	85.7	-3.8%	7.0%
9	81.5	-1.3%	12.4%
10	80.0	0.9%	11.4%
11	83.3	5.9%	8.7%
12	89.7	4.8%	-0.3%
13	88.5	2.4%	-6.3%
14	92.7	4.0%	-3.8%
15	86.1	-1.6%	-4.5%
16	85.0	-1.4%	-5.0%

5700K | Rf: 80.3 | Rg: 91.5 | CRI: 84

COLOR VECTOR GRAPHIC



■ Test ■ Reference

HUE BIN	Rf	GRAPHIC SHIFTS %	
		CHROMA	HUE
1	73.8	-11.2%	2.6%
2	83.7	-5.5%	5.8%
3	84.2	-4.0%	5.5%
4	85.8	-3.5%	1.3%
5	85.3	-7.1%	0.6%
6	89.2	-5.8%	-2.2%
7	81.5	-10.7%	1.2%
8	75.7	-9.7%	8.5%
9	74.9	-7.8%	18.8%
10	67.8	-1.6%	18.0%
11	76.1	5.5%	12.0%
12	90.8	4.9%	-1.6%
13	83.6	5.0%	-9.5%
14	81.7	-1.2%	-10.0%
15	69.0	2.0%	-22.8%
16	83.2	-8.5%	-1.0%

PROJECT	FIXTURE TYPE	DATE
---------	--------------	------



AUDREY LED VANITY

24VDC HORIZONTAL OR VERTICAL WITH WARM DIM TECHNOLOGY OPTION




DESIGNED BY GREGORY KAY | ASSEMBLED IN AMERICA

Rev.10.18.19

TM-30-15 DATA: The data below is for SS2C, SS5C, SS7C and SS10C bare LED Soft Strips. Consistent color temperatures throughout a single strip and among multiple strips is possible through a 3 phase binning process in which each order is inspected with a color meter to ensure uniformity.

2700D | Rf: 89.5 | Rg: 100.8 | CRI: 95+

COLOR VECTOR GRAPHIC




■ Test ■ Reference

HUE BIN	Rf	GRAPHIC SHIFTS %	
		CHROMA	HUE
1	88.8	-5.1%	1.4%
2	89.8	-2.7%	4.1%
3	87.2	0.3%	5.9%
4	92.3	-0.9%	1.0%
5	93.3	1.5%	1.7%
6	92.4	3.6%	-0.2%
7	92.2	-0.9%	-2.4%
8	96.7	-0.4%	-1.1%
9	92.3	-1.2%	3.7%
10	88.9	-0.0%	6.1%
11	86.4	5.1%	7.4%
12	88.2	6.3%	-0.9%
13	87.2	3.8%	-8.1%
14	84.2	3.8%	-11.0%
15	89.8	-2.6%	-4.3%
16	82.7	-3.4%	-11.1%

3000D | Rf: 89.8 | Rg: 101.4 | CRI: 95+

COLOR VECTOR GRAPHIC



■ Test ■ Reference

HUE BIN	Rf	GRAPHIC SHIFTS %	
		CHROMA	HUE
1	90.2	-4.2%	1.5%
2	90.9	-2.0%	3.7%
3	87.9	0.8%	5.5%
4	92.1	-0.9%	0.6%
5	93.0	1.5%	1.6%
6	92.2	3.9%	-0.2%
7	92.1	-0.3%	-2.0%
8	96.7	0.0%	-1.2%
9	92.5	-0.6%	3.7%
10	88.3	1.1%	7.0%
11	87.2	4.1%	7.4%
12	87.2	6.7%	-1.0%
13	88.2	3.8%	-7.2%
14	85.3	4.3%	-9.9%
15	90.9	-2.2%	-3.6%
16	83.4	-2.2%	-11.2%

PROJECT		FIXTURE TYPE		DATE	
---------	--	--------------	--	------	--