
CDMX1-RGBW

**TOUCH CONTROLLER** 



REV 07.22.20

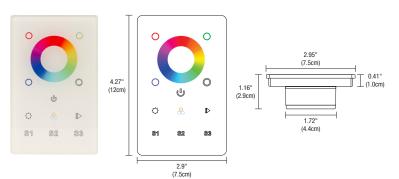

## Description:

Full touch controller offers fast and accurate color tone adjustment and independent brightness control. The 1 zone controller can adjust RGB and RGBW LEDs smoothly and accurately. Independent smooth dimming of each channel enables the controller to achieve millions of colors. For indoor applications only, and includes a Power Adapter to operate the controller.

Applications:

Indoor

Power Input: 120-277VAC

Туре

**RGBW** 

RGBW RGB & RGBW

Installation:

Output Signal:


Fits in a single gang 2.5 inch deep junction box, not to be used with a multi gang box

USITT DMX 512 (1990)

Finish


WH

WH White

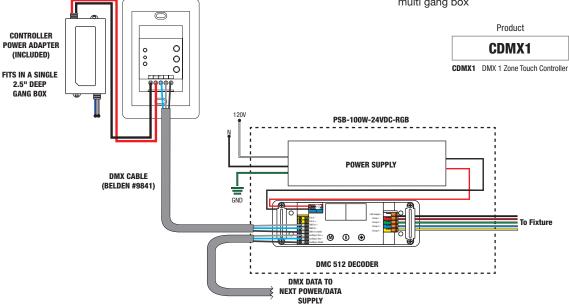

	DYNAMIC COLOR CHANGING (DM	IX) POWER SUPPLIES & RECOMM	IENDED CONTROLLERS			
	PSB-100W-24VDC-RGB	PSB-2X100W-24VDC-RGB	PSB-3X100W-24VDC-RGB	PSB-4X100W-24VDC-RGB		
ORDERING CODE	5 6 6 6 6		S S S Labore	3 3 3 3 3 4 4 4		
		SPECIFICATIONS		ı		
MAXIMUM LOAD	100W	2X100W	3X100W	4X100W		
INPUT VOLTAGE	120-277VAC	120-277VAC	120-277VAC	120-277VAC		
OUTPUT VOLTAGE	24VDC	24VDC	24VDC	24VDC		
DIMENSIONS	12.14" X 6.48" X 2.18"	14" X 10" X 3"	17" X 13" X 3"	17" X 13" X 3"		
CLASSIFICATION	CLASS 2	CLASS 2	CLASS 2	CLASS 2		
IN-WALL MOUNTING	PSB-100W-24VDC-RGB-IW	N/A	N/A	N/A		
		DIMMING & CONTROLS				
TOUCH SCREEN CONTROLLER (CTP)	•	•	•	•		
COLOR DIAL CONTROLLER (CDP)	•	•	•	•		
DMX 1 ZONE RGBW TOUCH CONTROLLER (CDMX1-RGBW)	•	•	•	•		

Classification: UL2108 -  $^{\star}$  24VDC over 100 Watts, wires must be in conduit from Remote Power Supply to J-box.



## 8.5" X 14" IN-WALL MOUNTING KIT

Includes Power Supply, Box Cover, and Stud Hangers for installing Junction Box in wall. Select "IW" in the options section of compatible Power Supply ordering codes if an In-Wall Mounting Kit is needed.

ORDERING CODES: PSB-100W-24VDC-RGB-IW

PROJECT	FIXTURE TYPE	DATE	