



DESCRIPTION

Cirrus Power Suspension R1 is a linear LED fixture that offers general light in a clean, contemporary style with a 24VDC Power Supply included in the canopy. Cirrus is available in various increments from 12"-420" (35') with a 140° beam spread, with a variety of finishes and Warm Dim or Tunable White options. Fixture includes a 5 year pro-rated warranty. For custom designs and quotes, send drawings to design@PureEdgeLighting.com.

Wattages for this fixture are available in the following options:

- 2W - 2.5 Watts per Foot, Lengths up to 420" (35')
- 5W - 4.4 Watts per Foot, Lengths up to 240" (20')
- 7W - 7.3 Watts per Foot, Lengths up to 160" (13.3')
- 10W - 9.6 Watts per Foot, Lengths up to 120" (10')

INSTALLATION

- Includes Canopy with 120V/24VDC Electronic Low Voltage LED Power Supply. For under 60 Watts (Non-IC), the Power Supply will fit inside the Electrical Junction Box with a Flush 4.6" Canopy
- Includes adjustable 12' Coaxial and Aircraft Cables (additional Aircraft Cables included for support when fixture exceeds 72")

FINISHES



Satin Black **BK** Antique Bronze **BZ** Chrome **CH** Satin Aluminum **SA** Satin Nickel **SN** White **WH**



Satin Brass with Black Canopy **BB** Satin Brass with White Canopy **BW**

LENSES

Diffused White R1 Rectangular Lens, 140° Beam Spread

APPLICATIONS

Designed for indoor use only. Ideal environments include: Kitchens, Dining Rooms, Hallways, Conference Rooms, Offices, Architectural, and Retail

LAMPING

- Choose from 9 different Color Temperatures from 2200K-5700K including Warm Dim
- Warm Dim: 2700K-2000K (**27D**) or 3000K-2000K (**30D**)
- Tunable White: SEE REMOTE POWER OPTIONS
- 50,000 Hour Lamp Life

POWER SUPPLY (INCLUDED IN CANOPY)

- 120V input, 24VDC 100 watt and 200 watt output; Electronic Low Voltage LED Power Supply

DIMMING (SOLD SEPARATELY)*

- Dimmable with ELV dimmer
- Legrand, Adorne ADTP703TU
- Lutron: Diva DVELV-300P, Skylark SELV-300P, Maestro MAELV-600, and Radio Ra 2

*Dimmers not available through PureEdge Lighting

System	Wattage Per Foot	Canopy	Nominal Size (Inches)	Color Temperature	Finish
CSR1P	2W	E	420	22K	SN
CSR1P Cirrus Suspension Rectangular 1 Lens, with Power	2W 2.5 Watts (420" max, 35') 5W 4.4 Watts (240" max, 20') 7W 7.3 Watts (160" max, 13.3') 10W 9.6 Watts (120" max, 10')	E End Feed E2 End Feed, 2 Canopies	12-420 Order in various increments from 12"-420" (Maximum shipping length). Maximum shipping length for Chrome is 84". <small>*See length chart for exact dimensions</small>	22K 2200K Amber White 24K 2400K Very Warm White 27K 2700K Incandescent White 27D 2700K Warm Dim (5W only) 30K 3000K Warm White 30D 3000K Warm Dim (5W only) 35K 3500K Neutral White 40K 4000K Cool White 57K 5700K Daylight White	BK Satin Black BZ Antique Bronze CH Chrome SA Satin Aluminum SN Satin Nickel WH White BB Satin Brass with Black Canopy BW Satin Brass with White Canopy

PROJECT		FIXTURE TYPE		DATE	
---------	--	--------------	--	------	--


LAMP DATA Lamp Data for Cirrus Suspension R1

CSR1P																																
DIFFUSED RECTANGULAR 1 LENS																																
DESCRIPTION	2W (2.5 watts)								5W (4.4 watts)								7W (7.3 watts)								10W (9.6 watts)							
WATTS PER FOOT																																
COLOR TEMPERATURE	22K	24K	27K	30K	35K	40K	57K	22K	24K	27K	27D*	30K	27D*	35K	40K	57K	22K	24K	27K	30K	35K	40K	57K	22K	24K	27K	30K	35K	40K	57K		
LUMENS PER FOOT (lm/ft)	123	136.5	150	164	187	204	217	239	265	291	329	318	359	364	396	422	379	420.5	462	505	579	629	670	448	497	546	597	683	743	791		
LUMENS PER WATT (lm/w)	49	109	60	65	75	81	87	54	60	66	75	72	82	83	90	96	52	57.5	63	69	79	86	92	47	52	57	62	71	77	82		
CRI	85+	90+	95+	95+	85+	84	84	85+	90+	95+	95+	95+	85+	84	84	85+	90+	95+	95+	85+	84	84	85+	90+	95+	95+	85+	84	84			


*27D, 30D - Warm Dim (4.8 Watts)

8', 140° AT 3000K DIFFUSED WHITE LENS


2 Watt 140°		5 Watt 140°		7 Watt 140°		10 Watt 140°	
Distance	Foot Candles	Distance	Foot Candles	Distance	Foot Candles	Distance	Foot Candles
1'	69	1'	111	1'	180	1'	191
1.5'	46	1.5'	75	1.5'	120	1.5'	127
2'	35	2'	56	2'	90	2'	95
3'	23	3'	37	3'	60	3'	62
4'	16	4'	27	4'	43	4'	45
5'	12	5'	20	5'	33	5'	34
6'	10	6'	16	6'	26	6'	27
7'	8	7'	13	7'	21	7'	21
8'	7	8'	11	8'	18	8'	19

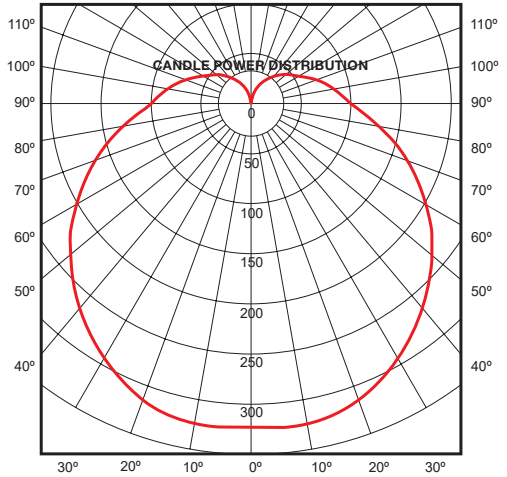

140° BEAM SPREAD

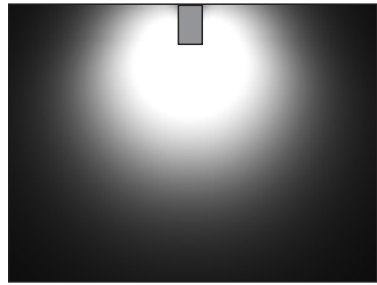

DIFFUSED WHITE LENS



CIRRUS R1 LENS (ACTUAL SIZE)

PROJECT	FIXTURE TYPE	DATE
---------	--------------	------

CIRRUS SUSPENSION R1

RECTANGULAR R1 WITH POWER, END FEED

LENGTH CHART Actual lengths for Cirrus Suspension R1

22K, 24K, 27K, 30K, 35K, 40K & 57K								
Ordering Code (Nominal Size)	Actual Length (Inches)	Actual Length (Chrome)	Ordering Code (Nominal Size)	Actual Length (Inches)	Actual Length (Chrome)	Ordering Code (Nominal Size)	Actual Length (Inches)	Actual Length (Chrome)
12	13.0	13.0	168	169.4	169.4	324	325.8	326.2
15	15.4	15.4	171	171.8	172.2	327	328.2	328.6
17	17.8	17.8	173	174.2	174.6	329	330.6	331.0
20	20.2	20.2	176	176.6	177.0	332	333.0	333.4
22	22.6	22.6	178	179.0	179.4	334	335.4	335.8
24	25.0	25.0	180	181.4	181.8	336	337.8	338.2
27	27.4	27.4	183	183.8	184.2	339	340.2	341.0
29	29.8	29.8	185	186.2	186.6	341	342.6	343.4
32	32.2	32.2	188	188.6	189.0	344	345.0	345.8
34	34.6	34.6	190	191.0	191.4	346	347.4	348.2
36	37.0	37.0	192	193.4	193.8	348	349.8	350.6
39	39.4	39.4	195	195.8	196.2	351	352.2	353.0
41	41.8	41.8	197	198.2	198.6	353	354.6	355.4
44	44.2	44.2	200	200.6	201.0	356	357.0	357.8
46	46.6	46.6	202	203.0	203.4	358	359.4	360.2
48	49.0	49.0	204	205.4	205.8	360	361.8	362.6
51	51.4	51.4	207	207.8	208.2	363	364.6	365.0
53	53.8	53.8	209	210.2	210.6	365	367.0	367.4
56	56.2	56.2	212	212.6	213.0	368	369.4	369.8
58	58.6	58.6	214	215.0	215.4	370	371.8	372.2
60	61.0	61.0	216	217.4	217.8	372	374.2	374.6
63	63.4	63.4	219	219.8	220.2	375	376.6	377.0
65	65.8	65.8	221	222.2	222.6	377	379.0	379.4
68	68.2	68.2	224	224.6	225.0	380	381.4	381.8
70	70.6	70.6	226	227.0	227.4	382	383.8	384.2
72	73.0	73.0	228	229.4	229.8	384	386.2	386.6
75	75.4	75.4	231	231.8	232.2	387	388.6	389.0
77	77.8	77.8	233	234.2	234.6	389	391.0	391.4
80	80.2	80.2	236	236.6	237.0	392	393.4	393.8
82	82.6	82.6	238	239.0	239.4	394	395.8	396.2
84	85.0	85.0	240 (2K4K & RGB max)	241.4	241.8	396	398.2	398.6
87	87.4	87.8	243	244.2	244.2	399	400.6	401.0
89	89.8	90.2	245	246.6	246.6	401	403.0	403.4
92	92.2	92.6	248	249.0	249.0	404	405.4	405.8
94	94.6	95.0	250	251.4	251.4	406	407.8	408.2
96	97.0	97.4	252	253.8	253.8	408	410.2	410.6
99	99.4	99.8	255	256.2	256.6	411	412.6	413.0
101	101.8	102.2	257	258.6	259.0	413	415.0	415.4
104	104.2	104.6	260	261.0	261.4	416	417.4	417.8
106	106.6	107.0	262	263.4	263.8	418	419.8	420.2
108	109.0	109.4	264	265.8	266.2	420	422.2	422.6
111	111.4	111.8	267	268.2	268.6			
113	113.8	114.2	269	270.6	271.0			
116	116.2	116.6	272	273.0	273.4			
118	118.6	119.0	274	275.4	275.8			
120	121.0	121.4	276	277.8	278.2			
123	123.8	123.8	279	280.2	280.6			
125	126.2	126.2	281	282.6	283.0			
128	128.6	128.6	284	285.0	285.4			
130	131.0	131.0	286	287.4	287.8			
132	133.4	133.4	288	289.8	290.2			
135	135.8	135.8	291	292.2	292.6			
137	138.2	138.2	293	294.6	295.0			
140	140.6	140.6	296	297.0	297.4			
142	143.0	143.0	298	299.4	299.8			
144	145.4	145.4	300	301.8	302.2			
147	147.8	147.8	303	304.2	304.6			
149	150.2	150.2	305	306.6	307.0			
152	152.6	152.6	308	309.0	309.4			
154	155.0	155.0	310	311.4	311.8			
156	157.4	157.4	312	313.8	314.2			
159	159.8	159.8	315	316.2	316.6			
161	162.2	162.2	317	318.6	319.0			
164	164.6	164.6	320	321.0	321.4			
166	167.0	167.0	322	323.4	323.8			

PROJECT		FIXTURE TYPE		DATE	
---------	--	--------------	--	------	--



CIRRUS SUSPENSION R1

RECTANGULAR R1 WITH POWER, END FEED




REV 03.26.20

LENGTH CHART Actual lengths for Cirrus Suspension R1

27D & 30D								
Ordering Code (Nominal Size)	Actual Length (Inches)	Actual Length (Chrome)	Ordering Code (Nominal Size)	Actual Length (Inches)	Actual Length (Chrome)	Ordering Code (Nominal Size)	Actual Length (Inches)	Actual Length (Chrome)
12	13.0	13.0	150	151.4	151.4	288	289.8	290.2
15	16.0	16.0	153	154.4	154.4	291	292.8	293.2
18	19.0	19.0	156	157.4	157.4	294	295.8	296.2
21	22.0	22.0	159	160.4	160.4	297	298.8	299.2
24	25.0	25.0	162	163.4	163.4	300	301.8	302.2
27	28.0	28.0	165	166.4	166.4	303	304.8	305.2
30	31.0	31.0	168	169.4	169.4	306	307.8	308.2
33	34.0	34.0	171	172.4	172.8	309	310.8	311.2
36	37.0	37.0	174	175.4	175.8	312	313.8	314.2
39	40.0	40.0	177	178.4	178.8	315	316.8	317.2
42	43.0	43.0	180	181.4	181.8	318	319.8	320.2
45	46.0	46.0	183	184.4	184.8	321	322.8	323.2
48	49.0	49.0	186	187.4	187.8	324	325.8	326.2
51	52.0	52.0	189	190.4	190.8	327	328.8	329.2
54	55.0	55.0	192	193.4	193.8	330	331.8	332.2
57	58.0	58.0	195	196.4	196.8	333	334.8	335.2
60	61.0	61.0	198	199.4	199.8	336	337.8	338.2
63	64.0	64.0	201	202.4	202.8	339	340.8	341.6
66	67.0	67.0	204	205.4	205.8	342	343.8	344.6
69	70.0	70.0	207	208.4	208.8	345	346.8	347.6
72	73.0	73.0	210	211.4	211.8	348	349.8	350.6
75	76.0	76.0	213	214.4	214.8	351	352.8	353.6
78	79.0	79.0	216	217.4	217.8	354	355.8	356.6
81	82.0	82.0	219	220.4	220.8	357	358.8	359.6
84	85.0	85.0	222	223.4	223.8	360	361.8	362.6
87	88.0	88.4	225	226.4	226.8	363	365.2	365.6
90	91.0	91.4	228	229.4	229.8	366	368.2	368.6
93	94.0	94.4	231	232.4	232.8	369	371.2	371.6
96	97.0	97.4	234	235.4	235.8	372	374.2	374.6
99	100.0	100.4	237	238.4	238.8	375	377.2	377.6
102	103.0	103.4	240	241.4	241.8	378	380.2	380.6
105	106.0	106.4	243	244.8	244.8	381	383.2	383.6
108	109.0	109.4	246	247.8	247.8	384	386.2	386.6
111	112.0	112.4	249	250.8	250.8	387	389.2	389.6
114	115.0	115.4	252	253.8	253.8	390	392.2	392.6
117	118.0	118.4	255	256.8	257.2	393	395.2	395.6
120	121.0	121.4	258	259.8	260.2	396	398.2	398.6
123	124.4	124.4	261	262.8	263.2	399	401.2	401.6
126	127.4	127.4	264	265.8	266.2	402	404.2	404.6
129	130.4	130.4	267	268.8	269.2	405	407.2	407.6
132	133.4	133.4	270	271.8	272.2	408	410.2	410.6
135	136.4	136.4	273	274.8	275.2	411	413.2	413.6
138	139.4	139.4	276	277.8	278.2	414	416.2	416.6
141	142.4	142.4	279	280.8	281.2	417	419.2	419.6
144	145.4	145.4	282	283.8	284.2	420	422.2	422.6
147	148.4	148.4	285	286.8	287.2			

PROJECT		FIXTURE TYPE		DATE	
---------	--	--------------	--	------	--

CANOPY Sizes & Wattages for Cirrus Suspension R1, End Feed Canopy

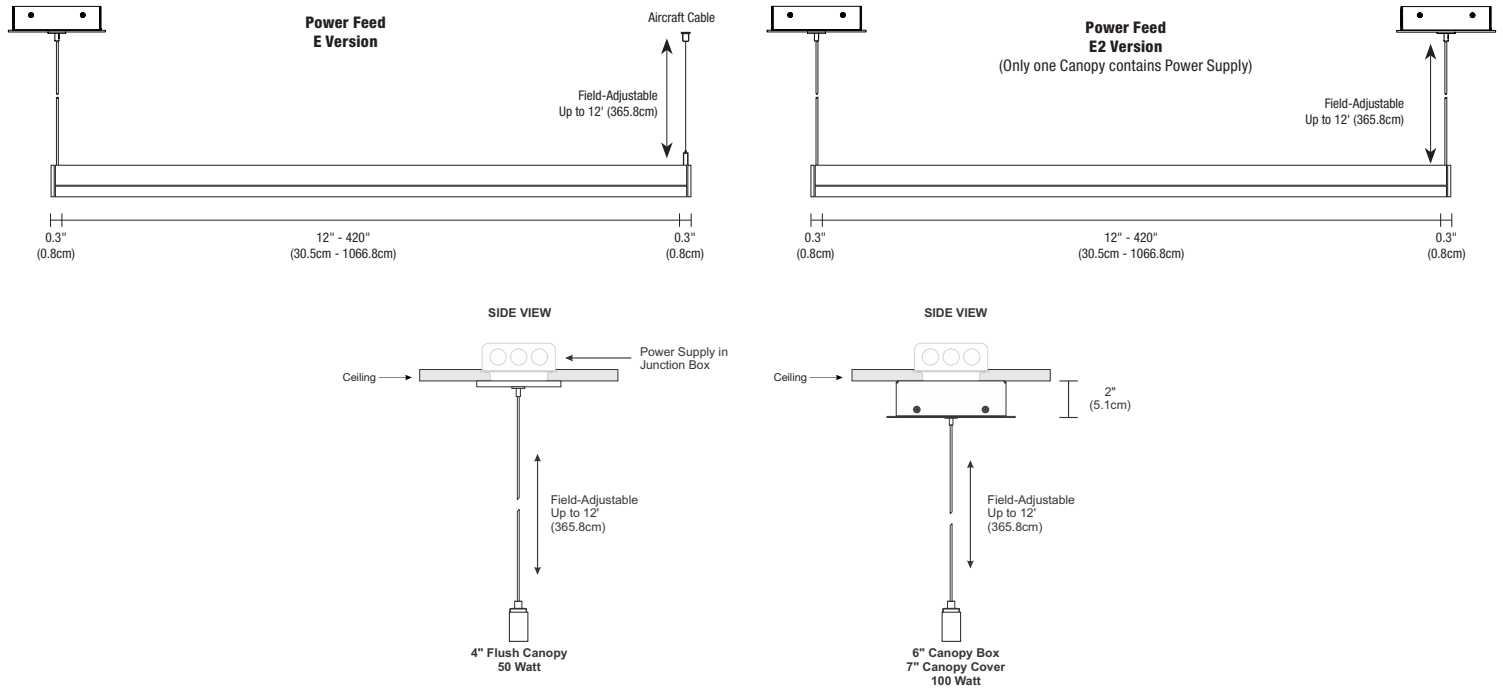


CANOPY CHART		
VERSION	4" FLUSH CANOPY (50 Watts)	6" SURFACE MOUNT CANOPY (100 Watts)
2W Lengths	Up to 240"	241" - 480"
5W Lengths	Up to 110"	111" - 288"
7W Lengths	Up to 80"	81" - 192"
10W Lengths	Up to 60"	61" - 144"

PROJECT		FIXTURE TYPE		DATE	
---------	--	--------------	--	------	--

ACCESSORIES Accessories for Cirrus Suspension




2" or 4" Canopy
(Not Included)





CHANNEL SUSPENSION ADJUSTABLE SWAG BAR & HOOK

Channel Suspension Adjustable Swag Bar and Hook allows a cable to form a straight connection to the Channel when the Power Canopy is not located directly above the fixture. Use when you have two or more Canopies (Power Supplies) on the same fixture run.




CHANNEL SUSPENSION SWAG HOOK

The clear plastic Swag Hook extends a cable from an electrical box that is not located directly above desired fixture location.

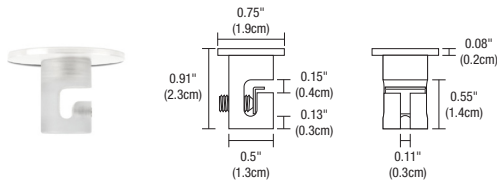


CIRRUS SUSPENSION ADJUSTABLE T-BAR CLIP

Cirrus Suspension Adjustable T-Bar Clip mounts to T-Bar grid ceilings. Available in Satin Nickel Hardware as Adjustable Power and Non-Power versions.

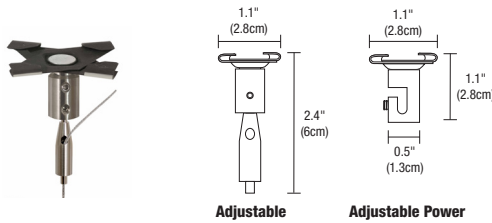

Adjustable Adjustable Power




PROJECT	FIXTURE TYPE	DATE
---------	--------------	------

CIRRUS SUSPENSION R1

RECTANGULAR R1 WITH POWER, END FEED

WIRING DIAGRAM Wiring Diagram for ELV Dimmer

APPLICATION ELV dimming for Cirrus Power Suspension R1, End Feed, Static White
DIMMING Dimmable with ELV dimmer: Legrand, Adorne ADTP703TU
 Lutron: Diva DVVELV-300P, Skylark SELVz-300P, Maestro MAELV-600 and Radio Ra 2

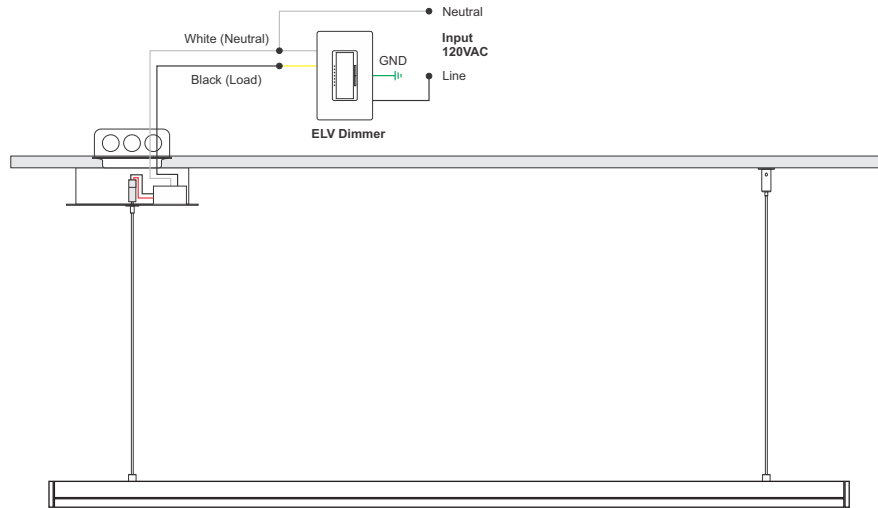

PROJECT	FIXTURE TYPE	DATE


SUSPENSION TM30 DATA

RECTANGULAR R1 WITH POWER, END FEED

TM-30-15 DATA: The data below is for SS2C, SS5C, SS7C, and SS10C bare LED Soft Strips. Consistent color temperatures throughout a single strip and among multiple strips is possible through a 3 phase binning process in which each order is inspected with a color meter to ensure uniformity.

2200K | Rf: 83.9 | Rg: 94.9

Color Vector Graphic




■ Test ■ Reference

		GRAPHIC SHIFTS %	
HUE BIN	Rf	CHROMA	HUE
1	78.8	-9.5%	1.3%
2	80.7	-7.8%	6.7%
3	78.2	-3.3%	9.4%
4	89.7	-2.8%	3.6%
5	93.2	-0.8%	2.6%
6	93.0	-0.6%	-0.7%
7	87.7	-5.9%	-3.5%
8	89.2	-6.8%	1.9%
9	83.4	-5.6%	6.0%
10	79.3	-3.7%	10.8%
11	81.4	2.9%	11.1%
12	84.9	5.3%	4.9%
13	88.1	4.9%	-10.1%
14	68.1	0.1%	-19.5%
15	86.0	-3.3%	-7.3%
16	76.4	-8.9%	-11.7%

2400K | Rf: 91.2 | Rg: 96.8

Color Vector Graphic




■ Test ■ Reference

		GRAPHIC SHIFTS %	
HUE BIN	Rf	CHROMA	HUE
1	92.0	-2.4%	1.5%
2	94.7	-2.1%	0.0%
3	95.4	-1.9%	-0.1%
4	88.7	-6.7%	-3.1%
5	92.8	-5.6%	1.0%
6	92.7	-3.4%	3.4%
7	89.9	-4.3%	4.1%
8	92.4	-1.4%	4.4%
9	89.0	-0.6%	5.8%
10	88.9	0.4%	6.2%
11	89.7	4.0%	5.4%
12	92.6	3.0%	-0.7%
13	90.9	1.1%	-7.0%
14	89.9	0.5%	-5.8%
15	92.1	-3.2%	0.1%
16	88.9	-1.7%	-6.3%

2700K | Rf: 87.7 | Rg: 96.1

Color Vector Graphic




■ Test ■ Reference

		GRAPHIC SHIFTS %	
HUE BIN	Rf	CHROMA	HUE
1	88.0	-4.3%	2.6%
2	91.6	-2.4%	2.0%
3	93.7	-1.4%	1.9%
4	88.9	-5.6%	-3.1%
5	92.3	-5.5%	-0.5%
6	92.9	-3.5%	0.1%
7	84.5	-7.5%	4.6%
8	90.8	-3.0%	4.4%
9	84.5	-1.3%	8.3%
10	83.9	2.0%	9.8%
11	87.2	5.3%	7.1%
12	89.2	5.4%	-2.6%
13	88.7	0.3%	-7.8%
14	86.8	1.7%	-9.3%
15	87.6	-5.4%	-1.3%
16	83.6	-3.3%	-9.5%

3000K | Rf: 88.1 | Rg: 99.7

Color Vector Graphic




■ Test ■ Reference

		GRAPHIC SHIFTS %	
HUE BIN	Rf	CHROMA	HUE
1	92.5	-3.1%	0.3%
2	93.3	-2.3%	1.9%
3	90.9	-0.8%	3.9%
4	94.3	-1.1%	1.4%
5	92.5	-2.6%	1.5%
6	96.4	1.2%	-0.3%
7	92.6	-2.5%	-0.0%
8	96.9	-1.4%	0.2%
9	92.3	-1.8%	4.3%
10	86.6	-0.7%	7.0%
11	86.5	2.4%	8.2%
12	89.8	5.9%	1.7%
13	93.9	2.6%	-2.7%
14	89.4	5.1%	-5.8%
15	90.1	-0.1%	-4.7%
16	86.5	0.3%	-9.7%

3500K | Rf: 86.1 | Rg: 95.5

Color Vector Graphic




■ Test ■ Reference

		GRAPHIC SHIFTS %	
HUE BIN	Rf	CHROMA	HUE
1	90.8	-3.8%	0.3%
2	92.3	-2.8%	2.1%
3	89.7	-1.0%	4.3%
4	92.6	-1.4%	1.7%
5	91.8	-3.1%	1.3%
6	96.2	0.8%	-0.4%
7	92.9	-3.2%	0.2%
8	94.3	-2.5%	1.5%
9	90.4	-2.5%	5.2%
10	84.3	-1.4%	9.5%
11	83.1	3.5%	9.8%
12	88.2	4.8%	3.4%
13	94.0	2.7%	-2.0%
14	88.7	5.9%	-5.8%
15	88.7	0.7%	-5.9%
16	86.8	-0.7%	-6.7%

4000K | Rf: 87.6 | Rg: 96.8

Color Vector Graphic



■ Test ■ Reference

		GRAPHIC SHIFTS %	
HUE BIN	Rf	CHROMA	HUE
1	88.9	-2.4%	2.5%
2	93.3	-0.4%	0.8%
3	94.8	-1.0%	-0.6%
4	87.9	-4.9%	-3.6%
5	85.3	-9.4%	-2.6%
6	90.2	-6.0%	0.2%
7	85.3	-7.6%	4.6%
8	83.7	-4.1%	8.2%
9	79.5	-1.1%	13.8%
10	78.6	1.5%	12.1%
11	83.5	6.4%	7.8%
12	90.9	3.6%	-1.1%
13	88.3	1.7%	-6.3%
14	91.9	-0.4%	-2.2%
15	84.5	-0.9%	-5.5%
16	84.7	-1.1%	-4.4%

PROJECT	FIXTURE TYPE	DATE
---------	--------------	------


SUSPENSION TM30 DATA

RECTANGULAR R1 WITH POWER, END FEED

TM-30-15 DATA: The data below is for SS2C, SS5C, SS7C, and SS10C bare LED Soft Strips. Consistent color temperatures throughout a single strip and among multiple strips is possible through a 3 phase binning process in which each order is inspected with a color meter to ensure uniformity.

5700K | Rf: 80.3 | Rg: 91.5

Color Vector Graphic




■ Test ■ Reference

HUE BIN	Rf	GRAPHIC SHIFTS %	
		CHROMA	HUE
1	75.4	-8.9%	4.7%
2	87.5	-2.6%	4.6%
3	90.7	-3.0%	-0.5%
4	83.2	-6.0%	-5.7%
5	76.2	-12.9%	-5.3%
6	81.4	-11.9%	-2.6%
7	74.8	-14.0%	5.1%
8	69.0	-9.0%	14.1%
9	72.6	-3.6%	22.2%
10	71.4	2.7%	16.1%
11	81.3	7.9%	5.3%
12	83.6	4.1%	-9.4%
13	78.4	0.7%	-15.3%
14	77.7	-6.2%	-11.0%
15	68.8	-1.3%	-21.2%
16	80.8	-9.6%	3.3%

2700D | Rf: 89.5 | Rg: 100.8

Color Vector Graphic




■ Test ■ Reference

HUE BIN	Rf	GRAPHIC SHIFTS %	
		CHROMA	HUE
1	88.8	-5.1%	1.4%
2	89.8	-2.7%	4.1%
3	87.2	0.3%	5.9%
4	92.3	-0.9%	1.0%
5	93.3	1.5%	1.7%
6	92.4	3.6%	-0.2%
7	92.2	-0.9%	-2.4%
8	96.7	-0.4%	-1.1%
9	92.3	-1.2%	3.7%
10	88.9	-0.0%	6.1%
11	86.4	5.1%	7.4%
12	88.2	6.3%	-0.9%
13	87.2	3.8%	-8.1%
14	84.2	3.8%	-11.0%
15	89.8	-2.6%	-4.3%
16	82.7	-3.4%	-11.1%

3000D | Rf: 89.8 | Rg: 101.4

Color Vector Graphic



■ Test ■ Reference

HUE BIN	Rf	GRAPHIC SHIFTS %	
		CHROMA	HUE
1	90.2	-4.2%	1.5%
2	90.9	-2.0%	3.7%
3	87.9	0.8%	5.5%
4	92.1	-0.9%	0.6%
5	93.0	1.5%	1.6%
6	92.2	3.9%	-0.2%
7	92.1	-0.3%	-2.0%
8	96.7	0.0%	-1.2%
9	92.5	-0.6%	3.7%
10	88.3	1.1%	7.0%
11	87.2	4.1%	7.4%
12	87.2	6.7%	-1.0%
13	88.2	3.8%	-7.2%
14	85.3	4.3%	-9.9%
15	90.9	-2.2%	-3.6%
16	83.4	-2.2%	-11.2%

PROJECT	FIXTURE TYPE	DATE
---------	--------------	------