



SCOPE LED
FAST JACK FIXTURE HEAD



DESIGNED BY GREGORY KAY | ASSEMBLED IN AMERICA

REV 01.17.20



FJ-SCO-1-SN
Satin Nickel



FJ-SCO-1-PN
Polished Nickel



FJ-SCO-1-BZ
Antique Bronze



FJ-SCO-1-WH
White

Description:

The Scope LED, a classic flat-back cylinder fixture, tilts 90° vertically. The cool-to-the-touch rotating lens allows adjustment of the beam angle from 20° spot to 50° flood while the fixture is lit. Fixture includes 5 year warranty.

Finish & Material:



Lens:

Adjustable TRI Lens gives a smooth uniform beam at 20° and 50° beam spreads

Application:

Suitable for damp or dry location, interior use only

LED Lamp Specifications:

Total Wattage: 9.3 Watt
Color Temp: 3000K
CRI: 92+
Lumens: 360lm
Lumen Per Watt: 32lm/w

Power Supply in Canopy:

120V input-12VAC output, ELV electric low voltage power supply (FJ and M fixtures order power supply separately)

Dimming:

- Dimmable to 1% Percent of Flicker <25%
- Triac and ELV dimming standard. Compatible with Lutron Diva, Skylark and Legrand ELV dimmers


Compliance Label:

ETL (Conforms to UL1598 and CSA 22.2 #250.0)


Warranty:

5 year warranty. See PureEdgeLighting.com

20° Scope



50° Scope



- FJ** Fast Jack
- M** Monorail
- MP2R** Mono-point 2" Round Canopy
- MP4R** Mono-Point 4" Round Canopy
- VR** Vanishing Point 0.5" Connection Drywall, No Outline of Canopy at connection point. Remote Power Supply
- V2P** Vanishing Point 2.0" Connection Drywall flush mount canopy outline will show. ELV power supply included with J-Box
- V2MR** Vanishing Point 2.0" Millwork Flush-Mount Canopy, Remote Power Supply.
- V2MP** Vanishing Point 2.0" Flush-Mount Canopy, ELV 60W Power Supply fits in J-BOX, for use with Mill-Work
- 2P4R** 2 Port 4" Round Canopy
- 2P8R** 2 Port 8" Round Canopy
- 3P8R** 3 Port 8" Round Canopy
- 3P12R** 3 Port 12" Round Canopy
- 2P12RE** 2 Port 12" Rectangle Canopy
- 3P12RE** 3 Port 12" Rectangle Canopy

- BZ** Antique Bronze
- SN** Satin Nickel
- PN** Polished Nickel
- WH** White (Only with FJ canopy)


PROJECT	FIXTURE TYPE	DATE
---------	--------------	------




SCOPE LED FAST JACK FIXTURE HEAD

DESIGNED BY GREGORY KAY | ASSEMBLED IN AMERICA




REV 01.17.20

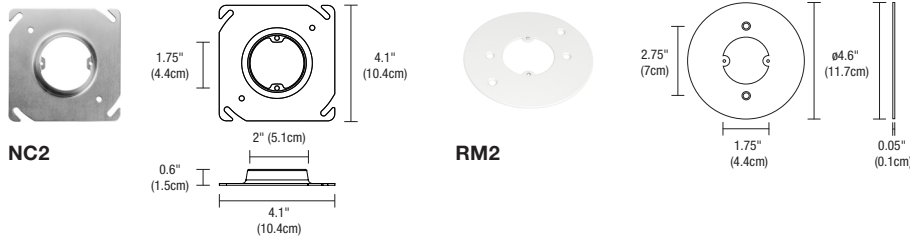

**NEW CONSTRUCTION & REMODEL
2" COVER FOR 4" SQUARE JUNCTION BOX**
NC2 included with the 2" Round Canopies. NC2 New Construction Junction Box Cover mounts to a standard 4" Electrical Box or Octagon Box, converting it to a 2" Plaster Ring for a 2" Round or Square Canopy. The RM2-Jbox Remodel Plaster Plate cover is used with the existing 4" Square Junction Box and Round Plaster Ring.

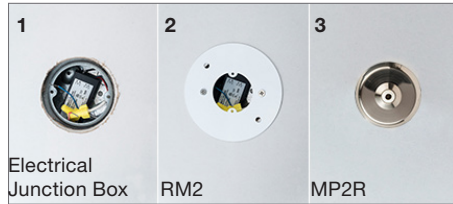

- Existing 4SQ J-box with Round Plaster Ring
- Add RM2 Remodel Plate with Power Supply from MP2R fixture
- Plaster and paint ceiling, then add Canopy and fixture

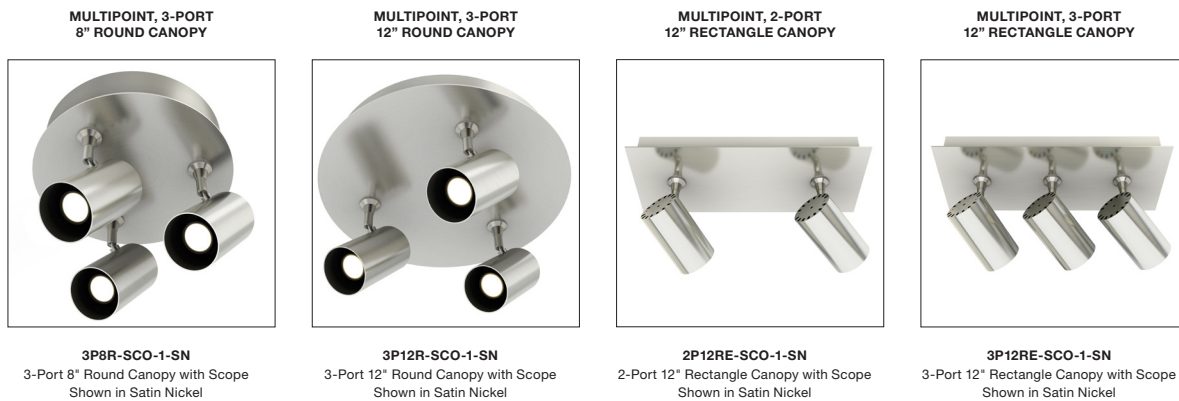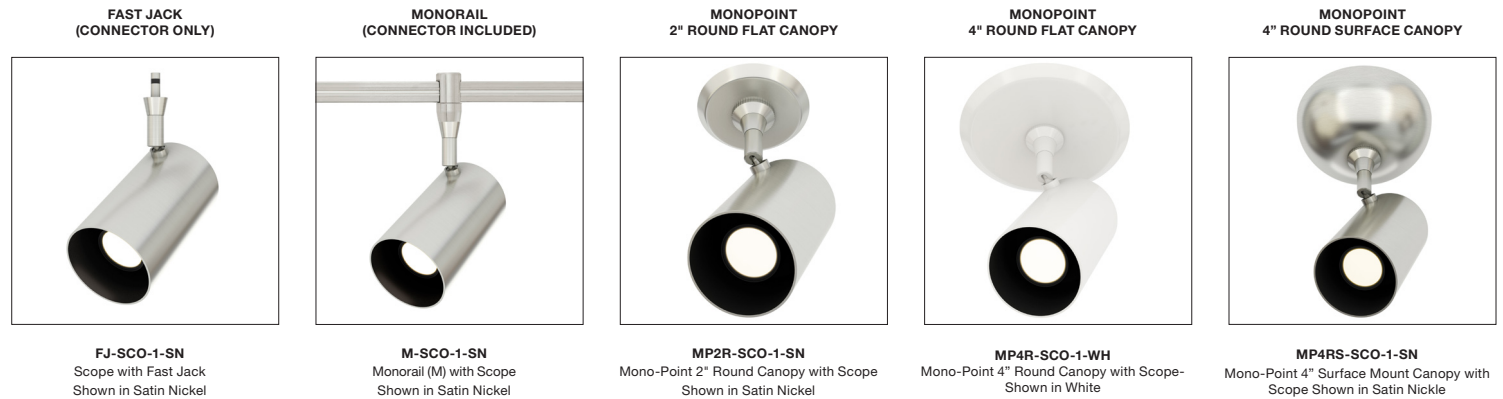

PROJECT	FIXTURE TYPE	DATE
---------	--------------	------




SCOPE LED FAST JACK FIXTURE HEAD

DESIGNED BY GREGORY KAY | ASSEMBLED IN AMERICA


REV 01.17.20

Canopy Diagrams: Canopy diagrams and measurements for Scope LED

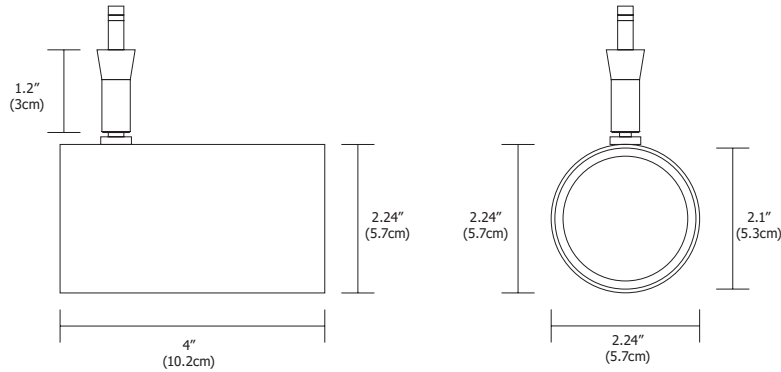


FJ-SCO



FJ-SCO




TE-60L-12
60 watt 12VAC power supply included
fits in canopy





TE-60L-12
60 watt 12VAC power supply included
fits in jbox




TE-60L-12
60 watt 12VAC power supply included
fits in jbox



TE-60L-12
60 watt 12VAC power supply included
fits in jbox




MP2R




MP4R




2P4R





3P8R

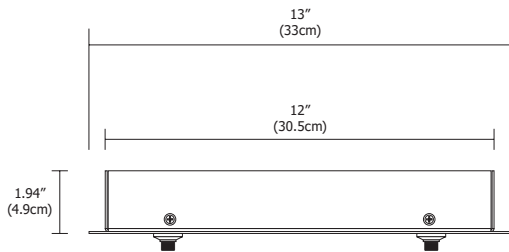

2P12RE

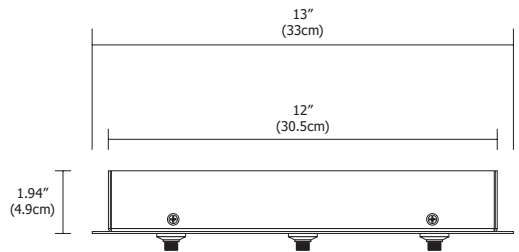

3P12RE

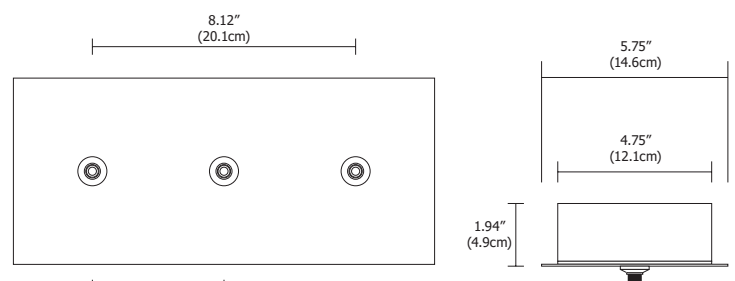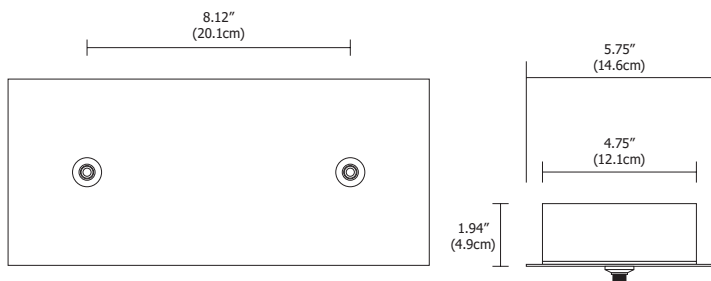

PROJECT	FIXTURE TYPE	DATE
---------	--------------	------




SCOPE LED
FAST JACK FIXTURE HEAD

DESIGNED BY GREGORY KAY | ASSEMBLED IN AMERICA

REV 01.17.20

3000K | Rf: 90 | Rg: 103.5
COLOR VECTOR GRAPHIC



■ Test ■ Reference

HUE BIN	Rf	GRAPHIC SHIFTS %	
		CHROMA	HUE
1	92.5	-2.4%	-2.4%
2	93.6	-2.3%	2.1%
3	87.2	-0.1%	6.0%
4	86.9	3.8%	6.5%
5	90.1	6.0%	4.8%
6	88.1	7.1%	-0.0%
7	85.9	4.9%	-6.5%
8	90.7	1.6%	-5.3%
9	92.7	-1.9%	-3.9%
10	91.2	-3.9%	0.3%
11	88.6	-2.4%	6.4%
12	88.1	3.0%	4.9%
13	92.2	4.8%	0.7%
14	90.9	5.8%	-2.6%
15	89.4	3.2%	-5.3%
16	89.7	1.2%	-7.3%

PROJECT		FIXTURE TYPE		DATE	
---------	--	--------------	--	------	--