

DESIGNED BY GREGORY KAY I ASSEMBLED IN AMERICA REV 12.31.19



DESCRIPTION:

The Pix Sticks Tie Stix Suspension projects the essence of modernity and contemporary design. An alluring blend of sleek metal and beautiful wood finishes that demand attention. Capable of elegantly designed and powerfully illuminated abstract configurations, its 1.24-inch linear channels intersect at alternate heights casting down-light illumination to complement a variety of modern spaces. Choose from 2-9 sticks each between 39" to 96" in length, and from nine color temperatures all down lit through Diffused White lenses. Optional Warm Dim technology comes in both 2700K (27D) and 3000K (30D) allowing you to dial in the familiar glow of a dim incandescent or halogen light. Select from a variety of Channel, Hardware and Canopy Finishes to complete the look. Contains high 85+ or 95+ CRI LEDs. Comes with a metal canopy (12" for 2-5 stick fixtures or 16" for 6-9 stick fixtures). Each fixture comes with 12 feet of adjustable cable

ELECTRICAL:

Power Supply: 20V input, 24VDC Class 2 output;

electronic low voltage LED power supply

(included)

Power Consumption: 5 or 7 Watts per Foot Options LEDs per Foot: Static White 35 total LED's

Warm Dim 35+35 70 total LED's

Dimming: ELV Dimming
Average LED life: 50,000 hrs

Approvals: Class 2 Wiring, Damp Location Suitable,

ETL listed. Assembled in America.

LUMEN PERFORMANCE

@3000K 100% 4.4W per Foot. Lumen Output per foot: 270 Lm/ft. Lumen Output per Watt: 54 Lm/W. CRI: 85+ to 95+

PHYSICAL ATTRIBUTES:

Mounting Options: 2 to 5 Channels: 12" Surface Mount

Canopy Round

6 to 9 Channels: 16" Surface Mount

Canopy Round

Ordering Increments: Order in sizes ranging from 39" to 96"

per channel

Max Length: 7 Watt option is 60" channel Material: Real Hardwood, Cast Aluminum

Average LED Life: 50,000 hours at normal use

Compliance: ETL listed

Warranty: PureEdge's 5 Year PRO-RATED Warranty

is back by over 30 years of precision lighting manufacturing and design.

APPLICATIONS: COMMERCIAL: Hospitality, Atrium,

Hotels, Casinos, Office Buildings, Lobby,

Retail Flagship Stores

Canopy and

RESIDENTIAL: Atrium, Kitchen, Game Room, Study, Bedroom, And Gym.

١	/ERSION	WATTS PER FOOT	LUMENS PER PER WATT FOOT		85+ CRI 22K, 24K, 35K, 40K, 57K	92+ CRI 27K, 30K	92+ CRI 27D, 30D	
	5W	5W	54	270	•	•	•	
Г	7W	7.5W	50	375	•	•	NA	

Lumen values are based on the 30K LED test

System		Wat	tage Per Foot		(1	Per Channel)		Co	lor Temperature		Hardware Fini		Channel Finish
PX2P-TX	-		5W	_		39	_		22K	-	S		WM
PX2P-TX Pix Sticks Tie Stix 2-Light with Power PX3P-TX Pix Sticks Tie Stix 3-Light with Power PX4P-TX Pix Sticks Tie Stix 4-Light with Power PX5P-TX Pix Sticks Tie Stix 5-Light with Power PX6P-TX PX7P-TX PX Sticks Tie Stix 4-Light with Power PX9P-TX Pix Sticks Tie Stix 9-Light with Power		5W 5 Watt 7W 7.5 Watt			*Max Length	E POWER SUPPLY FOR	R	24K 24001 27K 27001 27D 27001 30K 30001 30D 30001 35K 35001 40K 40001	X Sunset X Amber Static White X Mrey Warm Static White K Incandescent Static White K Incandescent Static White K Warm Dim to 2000K Warm Static White Warm Dim to 2000K Neutral Static White K Cool Static White C Daylight Static White	C Z B	s Satin Nickel : Chrome : Antique Bronze 3 Satin Black V White	WI WI WI SN CH BZ BK WI	M Wood Maple I Wood Walnut D Wood Cherry Wood White Oak Wood Espresso Satin Nickel Chrome Antique Bronze Satin Black I White Satin Brass
PROJECT							FIXTURE	TYPE				DATE	

Nominal Size In Inches



REV 12.31.19

	CSDSP															
DESCRIPTION		STANDARD EFFICIENCY, 100° DIFFUSED WHITE LENS WITHOUT LOUVER														
WATTS PER FOOT	5W (4.4 watts) 7W (7.5 watts)															
COLOR TEMPERATURE	22K	24K	27K	27D*	30K	27D*	35K	40K	57K	22K	24K	27K	30K	35K	40K	57K
LUMENS PER FOOT (Im/ft)	195	216.5	238	236	260	259	298	324	345	307	340.5	374	409	469	509	542
LUMENS PER WATT (Im/w)	44	49	54	49	59	54	68	74	78	42	46.5	51	56	64	70	74
CRI	85+	90+	95+	95+	95+	95+	85+	84	84	85+	90+	95+	95+	85+	84	84

HARDWARE FINISHES:



CHANNEL FINISHES:



Wood finishes are authentic natural products, exact color and grain may vary. If trying to match existing product original product must be returned to PureEdge to ensure the closest possible match.







PX5P-TX-5W-39-22K-ZWM



PX5P-TX-5W-39-22K-SWE



PX5P-TX-5W-39-22K-WWO

PROJECT	FIXTURE TYPE	DATE	
THOOLOT	TIXTOTIL TITL	D/ (1 L	1



REV 12.31.19



PX7P-TX-5W-39-22K-BWC





PX9P-TX-5W-39-22K-BBK



PX9P-TX-5W-39-22K-CCH



PX9P-TX-5W-39-22K-BSB



PX9P-TX-5W-39-22K-WSB

DDO IEOT	FIVELIDE TYPE	DATE	
PROJECT	FIXTURE TYPE	DATE	1






REV 12.31.19

Actual Size: See below for actual lengths for wood and metal channels

PIX STICKS TIE STIX SUSPENSION WITH POWER CENTER FEED - ACTUAL SIZES									
Ordering code (Nominal Size)	Wood channel Overall Length (Inches)	Metal channel Overall Length (Inches)							
39	39.9	39.5							
48	49.5	49.1							
60	61.5	61.1							
72	73.5	73.1							
84	85.5	85.1							
96	97.5	97.1							

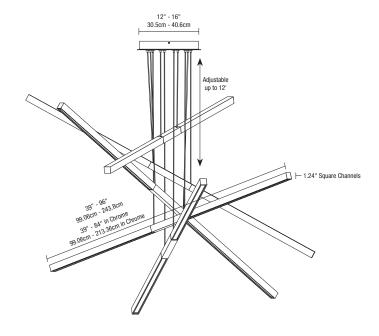

PROJECT		FIXTURE TYPE		DATE	
---------	--	--------------	--	------	--