

## Aria™ Lighted Mirror

Product Specifications: Residential

# ELECTRIC MIRROR®



### PRODUCT DESCRIPTION

The Aria™ offers a delicate dichotomy of design for any room requiring a unique new look: the romantic curves of rounded corners combined with the exacting look of a symmetrical inset border of light.

### SPECIFICATION STATEMENT

Solution shall consist of a radius-corner lighted mirror with forward-facing task lighting and 480-hour CASS-tested, lead-free, copper-free, corrosion-resistant glass. Mirror shall have uniform light output in frosted areas using dimmable, high-density (54 LEDs/foot), replaceable LED strips with 90+ CRI (Color Rendering Index) and delivering 1,280 initial lumens/foot with an efficacy of 140 lumens/watt. Product will be made in America with U.S. and global components and have a 7-year limited warranty.

### LIGHTING FEATURES AND BENEFITS

- Industry-leading lumen output for better task lighting
- Superior color rendering (CRI) for more natural, flattering, and softer light quality
- High-density linear LED design for even light distribution
- High-efficiency LEDs for best-in-class energy savings
- Forward-facing task lighting for ideal makeup application and grooming
- Forward-phase/triac dimming technology

### GENERAL FEATURES AND BENEFITS

- OmegaMirror™ corrosion-resistant, 480-hour CASS-tested proprietary mirror glass
- Environmentally-leading, lead-free, copper-free mirror glass composition
- Fast lead times
- Easy installation
- Title 24 compliant
- JA8-2022 compliant
- 7-year limited warranty
- Patent: [www.electricmirror.com/patents](http://www.electricmirror.com/patents)
- Made in America with U.S. and global components

### AVAILABLE OPTIONS

- [Ava™ touch-tunable white + dimming technology](#)<sup>1</sup>
- Defogger
- Custom sizes

### LIGHTING SPECIFICATIONS

- Best-in-class illumination: 1,280 initial lumens/foot
- Superior color rendering: 90+ CRI
- High-density design: 54 LEDs/foot
- High efficacy: 140 lumens/watt
- Color temperature (CCT): 3,000K
- LED L<sub>70</sub> Lifespan: 52,000-hours
- Extended longevity: replaceable LEDs

<sup>1</sup> See technology specification sheets for more details

### THE ELECTRIC MIRROR ADVANTAGE


- ✓ Global mirror technology leader for over 25 years
- ✓ More installations than all competitors combined
- ✓ Realistic warranty you can believe in and trust
- ✓ Lowest total cost of ownership
- ✓ U.S.-based customer service support
- ✓ 125,000-square-foot American manufacturing facility

# Aria™ Lighted Mirror

Product Specifications: Residential

## ELECTRIC MIRROR®

**DIMENSIONAL DRAWING** (Not to scale. Frost and border widths may vary depending on mirror size.)

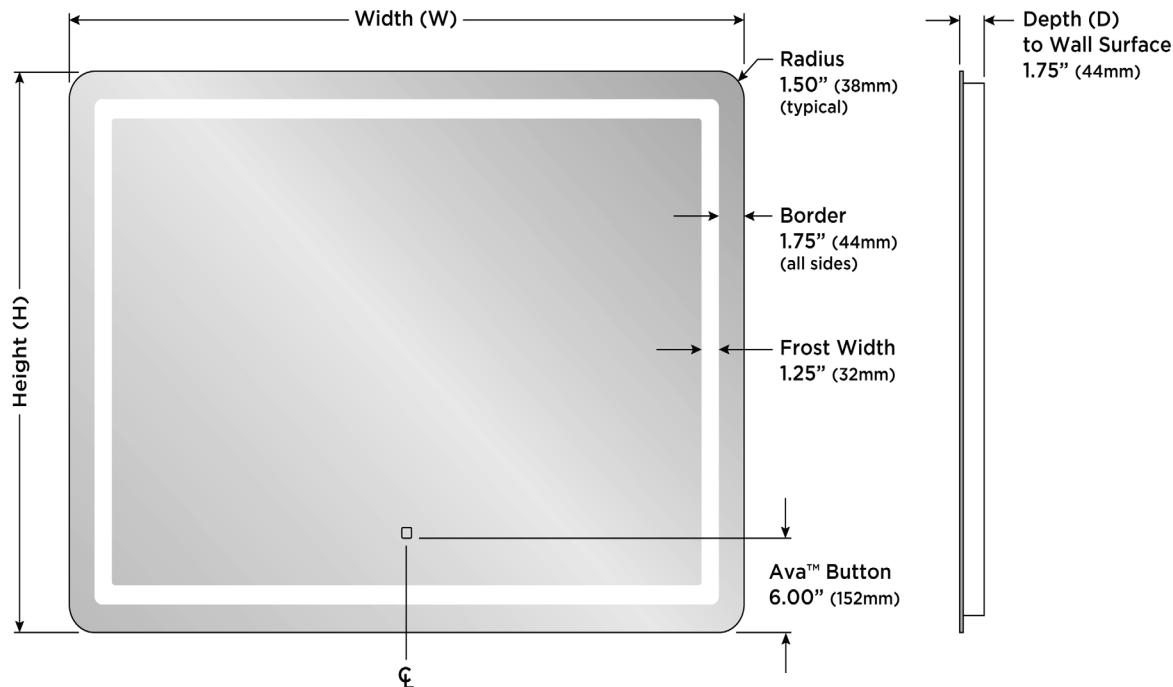

### MODELS

Base Model*	Model Type	Dimensions	Initial Lumens/Fixture	Power Requirements
ARI-2436	Standard	24" W x 36" H x 1.75" D	12,002	120-277VAC, 72W
ARI-2436-AK	With Ava™	(610mm W x 914mm H x 44mm D)	3,929	120 or 277VAC, 52W
ARI-3636	Standard	36" W x 36" H x 1.75" D	12,002	120-277VAC, 92W
ARI-3636-AK	With Ava™	(914mm W x 914mm H x 44mm D)	4,995	120 or 277VAC, 66W
ARI-4836	Standard	48" W x 36" H x 1.75" D	14,562	120-277VAC, 111W
ARI-4836-AK	With Ava™	(1,219mm W x 914mm H x 44mm D)	6,061	120 or 277VAC, 80W
ARI-6036	Standard	60" W x 36" H x 1.75" D	17,122	120-277VAC, 131W
ARI-6036-AK	With Ava™	(1,524mm W x 914mm H x 44mm D)	7,126	120 or 277VAC, 94W

\*Base model number shown only. To specify additional options, contact Electric Mirror at [residential@electricmirror.com](mailto:residential@electricmirror.com).

### SAFETY & INSTALLATION SPECIFICATIONS

- Entire assembly meets UL/cUL standards
- International certifications
- Safety-backed mirror
- 120VAC hardwire electrical connection; provide whip; junction box not required
- Chassis should be mounted to wall studs; mounting holes are provided
- Controlled by forward-phase dimming wall switch (by others)
- Fixture can only be hung in the WxH orientation as shown; fixture is not field-interchangeable