

#### PRODUCT DESCRIPTION

The Trinity™ lighted mirror combines a well-balanced shape, sleek lighted border, and soothing wall-glow to bring any space to life.

#### SPECIFICATION STATEMENT

Solution shall consist of a lighted mirror with forward-facing task lighting as well as wall-glow ambient lighting and 480-hour CASS-tested, lead-free, copper-free, corrosion-resistant glass. Mirror shall have uniform light output in frosted areas using high-density (54 LEDs/foot) replaceable LEDs with a 90+ CRI (Color Rendering Index) and delivering 1,280 initial lumens/foot with an efficacy of 140 lumens/watt. Product will be made in America with U.S. and global components and have a 7-year limited warranty.

#### THE ELECTRIC MIRROR ADVANTAGE

- ✓ Global mirror technology leader for over 25 years
- ✓ More installations than all competitors combined
- ✓ Realistic warranty you can believe in and trust
- ✓ Lowest total cost of ownership
- ✓ U.S.-based customer service support
- ✓ 125,000-square-foot American manufacturing facility

#### LIGHTING FEATURES AND BENEFITS

- Industry-leading lumen output for better task lighting
- Superior color rendering (CRI) for more natural, flattering, and softer light quality
- High-density linear LED design for even light distribution
- High-efficiency LEDs for best-in-class energy savings
- Forward-facing task lighting for ideal makeup application and grooming
- Wall-glow ambient lighting with diffuser for a finished side view
- Forward-phase/triac dimming technology

#### GENERAL FEATURES AND BENEFITS

- OmegaMirror™ corrosion-resistant, 480-hour CASS-tested proprietary mirror glass
- Environmentally-leading, lead-free, copper-free mirror glass composition
- Fast lead times
- Easy installation
- Title 24 compliant
- JA8-2022 compliant
- 7-year limited warranty
- Patent: [www.electricmirror.com/patents](http://www.electricmirror.com/patents)
- Made in America with U.S. and global components


#### AVAILABLE OPTIONS

- Defogger
- Custom sizes

#### LIGHTING SPECIFICATIONS

- Best-in-class illumination: 1,280 initial lumens/foot
- Superior color rendering: 90+ CRI
- High-density design: 54 LEDs/foot
- High efficacy: 140 lumens/watt
- Color temperature (CCT): 3,000K
- LED L<sub>70</sub> Lifespan (calculated): 52,000-hours
- Extended longevity: replaceable LEDs

DIMENSIONAL DRAWING (Not to scale. Frost and border widths may vary depending on mirror size.)

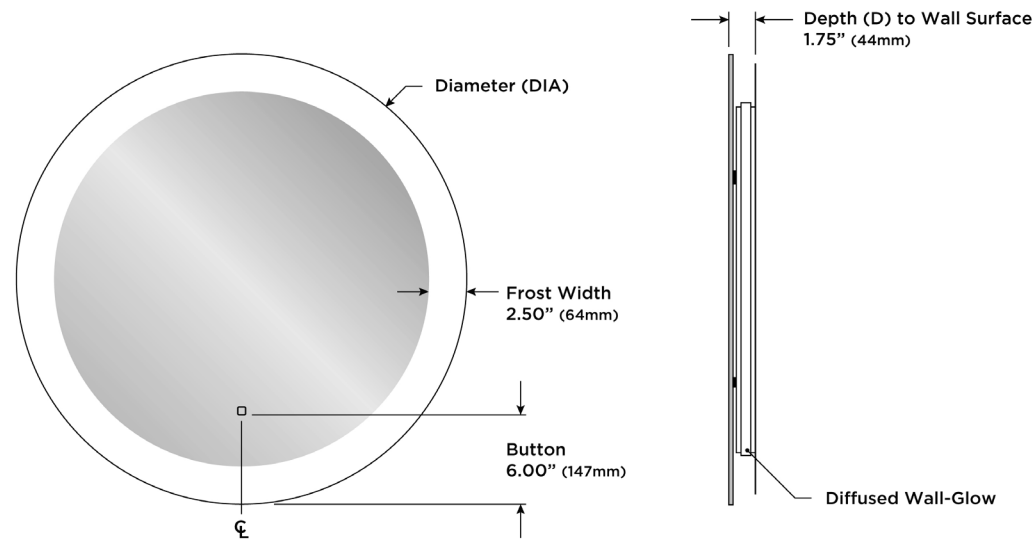

MODELS

Base Model <sup>1</sup>	Model Type	Dimensions	Initial Lumens/Fixture	Power Requirements
TRI-30	Standard	30" DIA x 1.75" D (762mm DIA x 44mm D)	7,681	120-277VAC, 59W

SAFETY & INSTALLATION SPECIFICATIONS

- Entire assembly meets UL/cUL standards
- International certifications
- Safety-backed mirror
- 120VAC hardwire electrical connection; provide whip; junction box not required
- Chassis should be mounted to wall studs; mounting holes are provided
- Controlled by forward-phase dimming wall switch (by others)
- Fixture can only be hung in the WxH orientation as shown; fixture is not field-interchangeable

<sup>1</sup> Base model number shown only. To specify additional options, contact Electric Mirror at [residential@electricmirror.com](mailto:residential@electricmirror.com).