

WALL WASH

LED

5 YEAR
WARRANTY

SHOWN IN FLANGELESS WALL WASH SQUARE WHITE

THIS SPECIFICATION GRADE LED WALL WASH FIXTURE COMBINES HIGH PERFORMANCE WITH AN ARCHITECTURAL CEILING APPEARANCE. TRIMS ARE ANGLED AND INCLUDE LUMINIT™ OPTICAL FILM WHICH CREATES EVENLY DISPERSED HORIZONTAL AND VERTICAL ILLUMINATION. EACH OF THE FIVE OPTIONAL LED MODULES COME FACTORY POSITIONED FOR OPTIMAL LIGHT PERFORMANCE AND DISTRIBUTION.

POWER / POWER SUPPLY

- The ELEMENT 4" Series offers a selection of five LED modules, see chart on next page, or visit element-lighting.com for more details
- Consult Quotes Department for alternate or custom driver selections

TRIMS

- Trim is angled with frosted linear spread lens with light shaping film to create consistent horizontal and vertical illumination
- Die cast aluminum with minimal thickness
- Available in flanged or flangeless ceiling appearance
- White can be field painted to match adjacent finishes
- Accommodates up to 1" ceiling thickness

HOUSING

- Airtight Non-IC / Chicago Plenum: 13.8" x 20" x 5.2"
Airtight IC: 13.8" x 20" x 7"
- IC suitable for insulation rating up to R60
- Constructed of heavy gauge cold rolled steel with durable matte black powder coat finish
- 4-1/2" ceiling opening, off-set
- Includes integral junction box approved for branch circuit through wiring
- ETL listed. Damp listed.

INSTALLATION

- Includes adjustable hanger bars. Includes butterfly brackets that attach to the side of the housing and are vertically adjustable with a wing nut
- Incorporates integral gunsights for positioning with laser level or string
- 45° adjustable collar rotation after installation assures square trims are perfectly aligned

Visit www.element-lighting.com for full photometrics.

GENERATION BRANDS



2016 Tech Lighting, L.L.C. All rights reserved. The "Element" graphic is a registered trademark of Element. Element reserves the right to change specifications for product improvements without notification.


ELEMENT
by Tech Lighting®

7400 Linder Avenue, Skokie, Illinois 60077 T 847.410.4400 F 847.410.4500


WALL WASH

TRIMS

ROUND

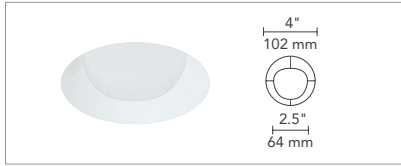


FLANGELESS WALL WASH

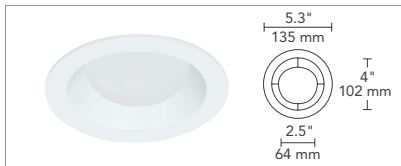


FLANGED WALL WASH

SQUARE

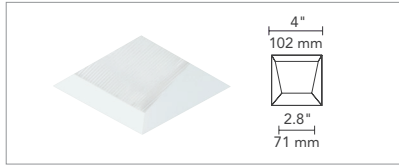

FLANGELESS WALL WASH

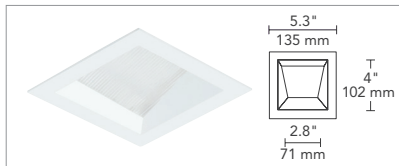

FLANGED WALL WASH

FINISH



ANTIQUE BRONZE



BLACK



SATIN NICKEL



WHITE (PAINTABLE)

LED SOLUTIONS


LAMPING & OPTICS

						
	CITIZEN MAX-OUTPUT / HIGH-OUTPUT / LOW-OUTPUT			XICATO / ARTIST SERIES	LUMENETIX WARM COLOR DIMMING	LUMENETIX PROGRAMMABLE WHITE
Output (Fixture Performance)	Max: 3300 / 2640	High: 2590 / 2060	Low: 1500 / 1200	1800 / 1275	1075	1075
CRI	80+ / 90+			80+ / 98+	90+	90+
Color Temperature	2700K 3000K 3500K			2700K 3000K 3500K	3000K-1800K Warm Dim	1600K-4000K
Dimming	Down to 5%*			Down to 5%*	Down to 1%	Down to 1%
Dimming Type	ELV, 0-10V, Hi-Lume			ELV, 0-10V, Lutron Hi-Lume	0-10V	0-10V, 2 sets
Beam Spreads	18°, 25°, 40°			21°, 43°, 60°	21°, 43°, 60°	21°, 43°, 60°
Power Supply	Constant Current Driver			Constant Current Driver	24V DC Constant Voltage	24V DC Constant Voltage
Wattage	Max: 32 watts	High: 32 watts	Low: 18 watts	24 watts / 22 watts	23 watts	23 watts
Title 24	At 90 CRI			—	—	—


*with ELV Driver option

4" HOUSING

MAX CEILING THICKNESS: 2"

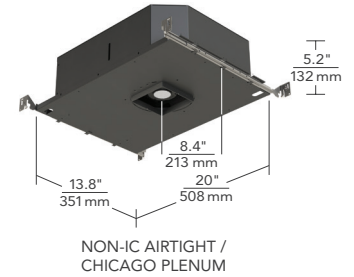

NON-IC AIRTIGHT /
CHICAGO PLENUM

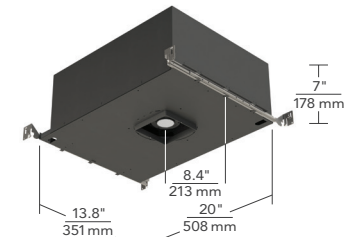

IC AIRTIGHT

