REFLECTIONS REMODEL TORUS INDIRECT DOWNLIGHT

Innovative, first-of-its-kind technology in architectural downlights, ELEMENT Reflections Remodel combines decorative recessed domes with beautifully controlled, reduced-glare indirect LED illumination. ELEMENT Reflections Remodel domes (available in 5", 8" and 12" diameters) are recessed into the ceiling plane and act as reflectors to a completely hidden ring of up-firing LEDs.

The Torus dome transforms beautiful three-dimensional geometry for dramatic visual interest with the subtle play of light and shadow. All ELEMENT Reflections domes also offer two ceiling appearance options: flanged for a more traditional ceiling appearance; or flangeless for a smooth, mudded-in ceiling appearance.

Pristine design and illumination:

- Reduced glare, indirect illumination (dimmable for enhanced mood-setting options)
- Three Aperture Options: 5", 8" and 12"
- Beveled, rounded trim edges smoothly and seamlessly integrate into ceiling

High quality LM80-tested LEDs

for consistent long-life performance and color

SPECIFICATIONS

	5"	8"	12"			
DELIVERED LUMENS	684	1255	1989			
WATTS	9	15	31			
VOLTAGE	Universal 120V-277V					
DIMMING*	0-10V, ELV, TRIAC (Down to 5%) Lutron Hi-Lume Eco-system Fade-to-Black (Down to 0.1%) Lutron Hi-Lume 2-wire (Down to 1%) EldoLED 0-10V or Dali (Down to 0.1%)					
POWER SUPPLY	Constant current driver with +.9 power factor and +85% efficiency					
LIGHT DISTRIBUTION	Lambertian					
ССТ	2700K, 3000K, 3500K, or Warm Color Dimming (3000K-2000K)					
CRI	90+					
CEILING APPEARANCE	Flanged (Trims accommodate a 1/2" to 1" ceiling thickness) or Flangeless with integrated mud plate					
HOUSING	IC (Suitable up to R60 spray foam insulation)					
GENERAL LISTING	ETL listed, Damp listed					
CALIFORNIA TITLE 24	Registered CEC Appliance Database. Can be used to comply with CEC 2016 Title 24 Part 6.					
LED LIFETIME	L70; 50,000 Hours					
WARRANTY**	RANTY** 5 Years					
*See ELEMENT lighting com for dimmor compatibility						

*See ELEMENT-lighting.com for dimmer compatibility. **Visit ELEMENT-lighting.com for specific warranty limitations and details.



TECH LIGHTING

TORUS shown in flanged



TORUS shown in flangeless

ORDERING INFORMATION


PRODUCT SERIES	CEILING APPEARANCE	CRI/CCT	DOME	HOUSING RATING	DRIVER		FIN	IISH
EDIM5R	RL REMODEL FLANGELESS	927 90 CRI, 2700K	2 TORUS	I IC		ELV/TRIAC/0-10V UNV**	W	WHITE
EDIM8R	RF REMODEL FLANGED	930 90 CRI, 3000K			-ELD0	ELDOLED 0.1% 0-10V LINEAR UNV**		
EDIM12R		935 90 CRI, 3500K			-ELD0A	ELDOLED 0.1% 0-10V LOGARITHMIC UNV**		
		WD 90 CRI, WARM DIM 3000K-2000K			-ELD1	ELDOLED 1% 0-10V LINEAR UNV**		
					-ELD1A	ELDOLED 1% 0-10V LOGARITHMIC UNV**		
					-ELDD	ELDOLED 0.1% DALI UNV**		
					-HLECO	HI-LUME 0.1% ECO-SYSTEM FADE-TO-BLACK UNV**		
					-HL2W	HI-LUME 1% 2 WIRE - 120V ONLY*		

*HL2W - 120V INPUT VOLTAGE ONLY.


**ALL DRIVERS EXCEPT LUTRON HL2W ARE UNV = 120V/277V INPUT VOLTAGE.

REFLECTIONS REMODEL TORUS INDIRECT DOWNLIGHT


DOME/TRIM




Torus Flanged 5"




Torus Flanged 8"




Torus Flanged 12"



Torus Flangeless^{*} 5" *shown with plaster plate





Torus Flangeless^{*} 8"




Torus Flangeless^{*} 12"

DOME/TRIM WITH REMOTE JUNCTION BOX

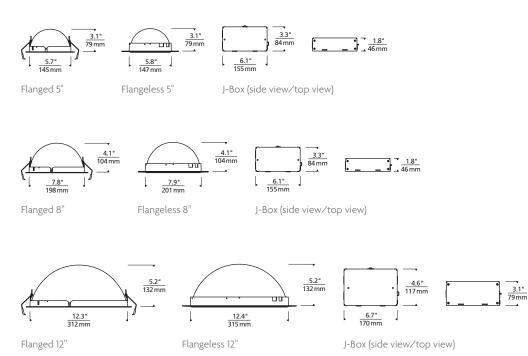



3/4 Flanged View



3/4 Flangeless View with integrated mud plate

TECHLIGHTING


VISUAL COMFORT GROUP




PHOTOMETRICS*

TORUS 5"


1011000	
Total Lumen Output:	684
Total Power:	9
Luminaire Efficacy:	76
Color Temp:	3000K
CRI:	90+







*For latest photometrics, please visit www.ELEMENT-Lighting.com

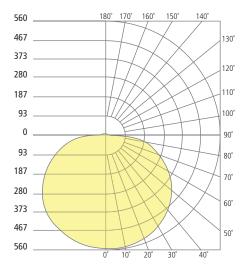

PROJECT INFO

FIXTURE TYPE & QUANTITY

(I)

JOB NAME & INFO

2019 Tech Lighting, L.L.C. All rights reserved. The "Tech Lighting" graphic is a registered trademark. Tech Lighting reserves the right to change specifications for product improvements without notification. NOTES



7400 Linder Avenue, Skokie, Illinois 60077 T 847.410.4400 F 847.410.4500