


TR-M07, TRIM, 3 1/4-INCH BAFFLED GIMBAL

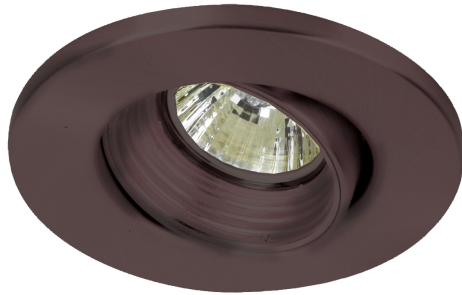

Product Details

| | | |
|-------------|---|-----------|
| Item No. | : | TR-M07-09 |
| Finish | : | Bronze |
| Diameter | : | 4.5" |
| Height | : | 1.25" |
| Est. Weight | : | 0.39 lbs |
| Approval | : | cETLus |



BULB DETAILS

| | | |
|---------------|---|------|
| No. of Bulbs | : | 1 |
| Bulb Type | : | MR16 |
| Bulb Voltage | : | 12V |
| Bulb Wattage | : | 50W |
| Input Voltage | : | 120V |
| Dimmable | : | Yes |
| Bulb Included | : | No |

Options Available

| ITEM NO. | FINISH | SHADE |
|-----------|---------------|-------|
| TR-M07-01 | Black | |
| TR-M07-02 | White | |
| TR-M07-03 | Gold | |
| TR-M07-04 | Satin Nickel | |
| TR-M07-05 | Chrome | |
| TR-M07-06 | Antique Brass | |
| TR-M07-08 | Satin Copper | |
| TR-M07-09 | Bronze | |

Combination design with gimbal plus shallow baffle. Step baffle improves dispersion of light and improves interior baffle reflection. Cast metal construction. Vertically adjustable 0 degrees to 30 degrees ; rotates 360 degrees within the housing. 3 1/4 inch housing required, sold separately.



TECHNICAL DETAILS

| | | |
|-------------------|---|------------|
| Power Wire Length | : | 6" |
| Beam Angle | : | 45 degrees |
| Cut Hole | : | 3.375" |

HOUSING DETAILS

| HOUSING # | APPLICATION | CUT HOLE | LENGTH | WIDTH | LAMPING |
|-----------|----------------------------|----------|---------|--------|---------------|
| GU325 | Remodel | 3.5" | 12" | 4" | |
| GUC325 | New Construction | 3.5" | 12.125" | 7.75" | 50W GU10 120V |
| GUI325 | Insulated Ceiling Airtight | 3.5" | 12.625" | 9" | |
| TERE-325 | Remodel | 3.5" | 12" | 4.625" | |
| TENC-325B | New Construction | 3.5" | 12.125" | 7.75" | 50W MR16 12V |
| TEIN-325 | Insulated Ceiling Airtight | 3.5" | 12.625" | 9" | |

PROJECT INFORMATION

Job Name: Date: Type:

Comments: