



TRIMLESS

TE611LED

HOUSING

- 18 gauge powder coated steel housing
- Remodel housing complete with adjustable mounting clips suitable for 1/2" and 5/8" drywall
- New construction plate, insulated ceiling box and airtight IC box sold separately (refer to housing options) *

MESH PLATE

- Steel mesh plate (included)
- Perforated perimeter allows mud to bond to mounting surface leaving a seamless finish in the ceiling

LAMPING

- 1 x 15W Integrated LED TRIAC Dimming. For 0-10V and alternate dimming options consult Eurofase
- Beam angle: 20°/40°
- Horizontal adjustment: 0° - 20°
- Kelvin: 3000K/3500K/4000K
- Lumen per head: 1290lm
- CRI: 80+

ELECTRICAL

- Class 2 dimmable constant current driver (included)
- Driver box mates to fixture by 24" flexible BX cable and has one 1/2" and two 3/4" knockouts for through branch circuit wiring
- Thermally protected
- Input voltage: 120V. For 277V and 347V input options consult Eurofase

DIMENSIONS

- Cut hole: 4 3/16"L x 4 3/16"W
- Fixture: 4"L x 4"W x 4 3/4"H

PHOTOMETRICS

- See pg 14

CUSTOMIZATION

- For customization, please consult Eurofase



Mesh plate included


Driver box included

SPECIFICATION:




WATTS PER HEAD	LUMENS PER HEAD	KELVIN	DIMMABLE	CRI	BEAM ANGLE
15W	1290lm	3000K / 3500K 4000K	TRIAC	80+	20° / 40°


PRODUCT DIMENSION:

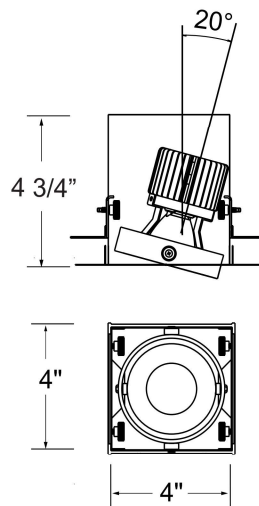

FINISHES:



-01 Black/Black



-02 White/White



4 3/16"L x 4 3/16"W

ORDERING GUIDE:

MODEL	KELVIN	BEAM ANGLE	FINISH
TE611LED	-30 3000K	-2 20°	-01 Black/Black
	-35 3500K	-4 40°	-02 White/White
	-40 4000K		

EXAMPLE: TE611LED-30-2-01

*HOUSING OPTIONS (SOLD SEPARATELY):

Refer to page 138 for housing specification

24063-012


NEW CONSTRUCTION PLATE



Cut Hole 4 3/16"L x 4 3/16"W
Dimension 11"L x 8 7/8"W x 1 3/8"H

30378-018
24083-010

AIRTIGHT IC BOX
INSULATED CEILING BOX



Cut Hole 4 3/16"L x 4 3/16"W
Dimension 11"L x 8 7/8"W x 9 1/2"H

