

Justice Design Group

Installation Instructions

Pendant

For Model : FAB-9025-CREM-BRSS





IMPORTANT

- . Justice Design recommends that a licensed electrician install this lighting fixture
- . Installation must comply with all building, safety, and electrical codes and requirements
- . Disconnect power to the junction box prior to installation
- . Do not reconnect power until this fixture is properly installed
- . This fixture is designed to mount to a standard metal 4-0 octagonal junction box









Hardware Pack contains:

- A. (2) Mounting Screws
- B. (4) Screws
- C. (3) Wire Nuts




Other parts included in the box:

- D. (1) Mounting Plate
- E. (1) Canopy
- F. (8) Stems
- G. (2) Swivel
- H. (2) Wall anchor
- I. (2) Screw
- J. (4) Hex Nut
- K. (2) Washer
- L. (1) Steel
- M. (2) Nipple
- N. (1) Acrylic Panel
- O. (4) Steel Washer
- P. (1) Fabric Shade
- Q. (4) Rubber Washer
- R. (2) Cap
- S. (2) Finial
- T. (4) Finial




1

Attach the mounting plate (D) to junction box using mounting screws (A).
Note: The side of the crossbar assembly marked "GND" must face out. The junction box is not included.

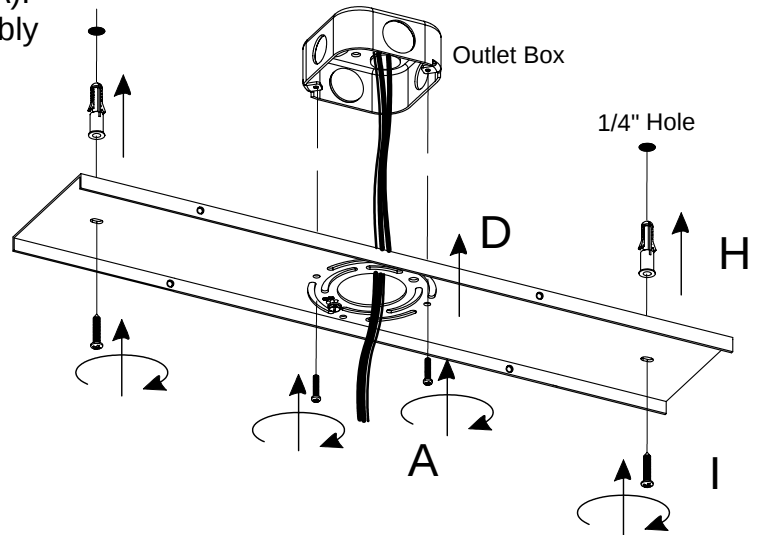

2


1. This lamp includes 8PCS stems on each side, by measuring, determine the desired hanging height.
2. Feed the lamp holder's electrical wires through stems (F), swivels (G), canopy (E) steel (L), and washer (K) then lock it securely with the hex nut (J).
3. While holding the lamp body towards the ceiling, connect the electrical wires. Observe polarity: black to power, white to neutral, and bare copper wire to green ground. Connect fixture wires to supply wires using wire nuts (C).

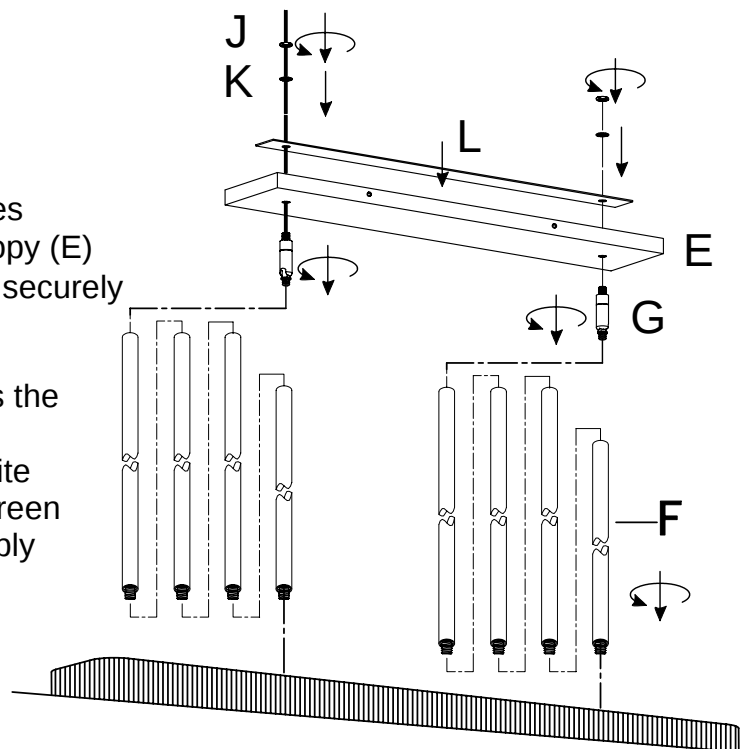

* Make sure two swivels opening are in the same direction while assembling.

3

1. Tuck wires and wire nuts (C) into junction box. Attach canopy(E) to mounting plate (D) then lock it securely with the screws (B).
2. NOTE: Install bulbs (Not included). Take care never to exceed maximum wattage.
3. Install the nipple (M) onto the coupling ,then install the steel washer(O) ,rubber washer(Q), acrylic panel(N),rubber washer(Q) and steel washer(O)onto the nipple(M) then lock it securely with the hex nut(J), the cap(R) onto the nipple(M) then securely with the finial(S).
4. Install the fabric shade(P) onto the string shade then lock it securely with the finials(T) .

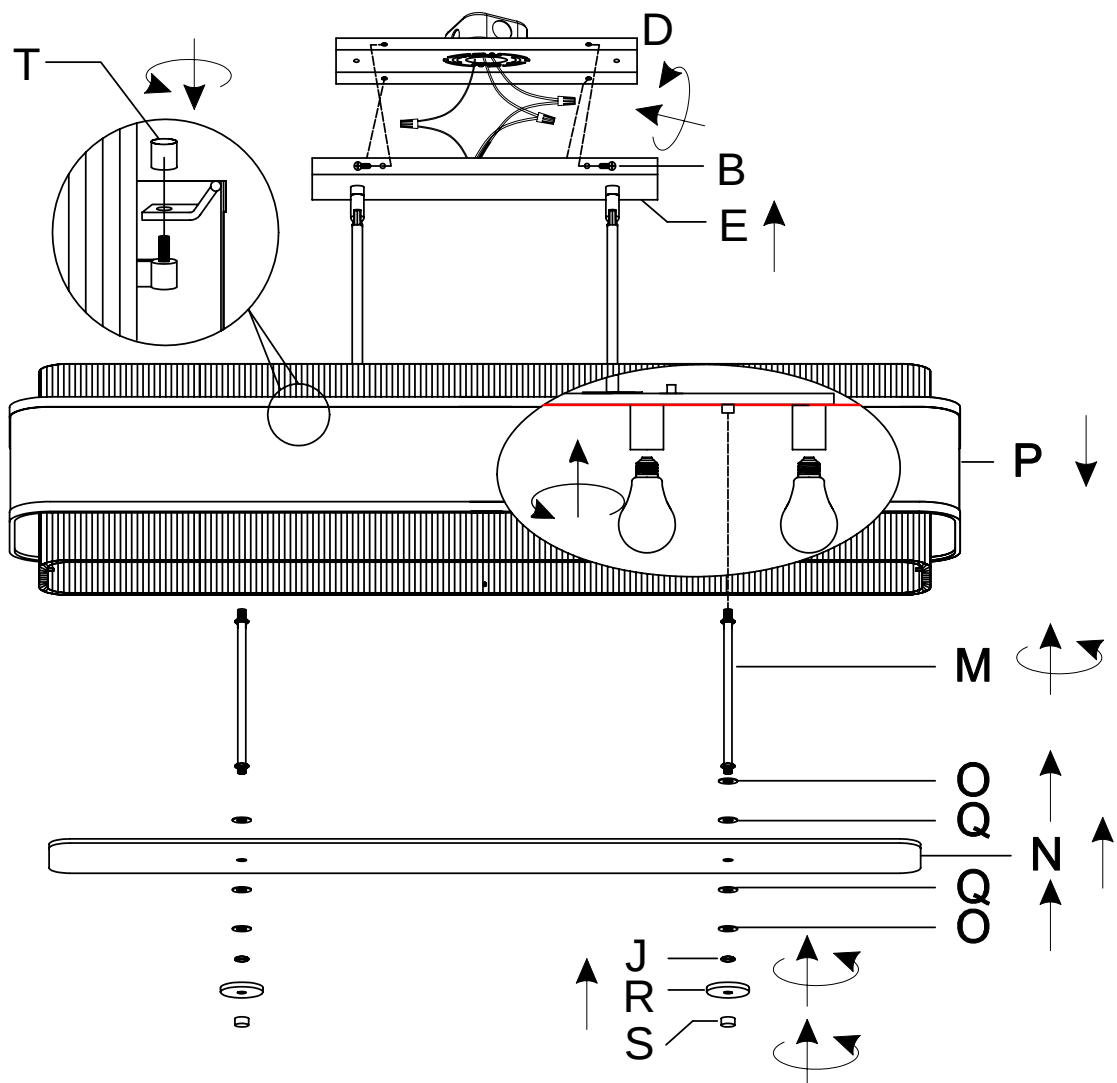

**Your installation is now complete.
Return power to the junction box
and test the fixture.**