

DALS LIGHTING

NOTES:

Canada 80, de la Seigneurie blvd., E. Blainville, Quebec J7C 4N1

U.S.A. 4383, NW 124th Ave., Coral Springs, Florida 33065 877.430.1818 info@dals.com dals.com

MODEL NAME

GBR35-CC-DUO


REVOLVE DUO

Double 3.5" Regressed Gimbal **Downlight**

Our Recessed family has grown with a new range of adjustable downlights. The effortless design and high functionality of these fixtures are sure to make a welcome addition in any room.


PROJECT:	TYPE:
DATE:	QTY:



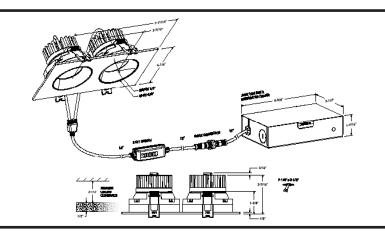

OΙ	HCK	CDEC	8

SIZE	WATTS	DELIVERED LUMENS*	COLOR °T 5CCT	CRI	VOLTAGE	BEAM ANGLE	FINISH
3.5" *Lumen output	24W measured at 3000K	1740lm	2700K 3000K 3500K 4000K 5000K	90	120V	40°	WhiteBlack



CONSTRUCTION	Lens Clear	Type of optics Optical lens	Type of LED COB
	Lens material Plastic	Housing material Aluminum	Cut hole size 7-1/8" x 3-1/2"
RATINGS	Placement Indoor/Outdoor	Lifespan 50,000 hrs.	FT rating FT6
	Location Wet	Certifications ETL, FCC, ICES, ES IC, ASTM E283-04, T24	Operating temperature -20° to 50° C

WHAT'S IN THE BOX

LED recessed fixture Junction box Push-in wire connectors Mounting hardware Instruction sheet

ACCESSORIES

RFP-DU0

Rough-in plate

ADAPTERS

REC-EXT108

108" extension cord for recessed fixtures

REC-EXT230

230" extension cord for recessed fixtures



Canada

80, de la Seigneurie blvd., E. Blainville, Quebec J7C 4N1

4383, NW 124th Ave., Coral Springs, Florida 33065

877.430.1818 info@dals.com dals.com

ELECTRICAL DETAILS

Input voltage 108-135V

Output current 545mA

Power factor 90%

Driver type Constant current

Output voltage

35.4V

LED model # COB

THD harmonic distortion <30%

Binning type

FEATURES

Integrated dimmable

driver

Superior LED performance and lifespan

30° tilting, 360° rotation

Minimal heat emission

 40° beam spread

Can be daisy chained

Switch-selectable CCT: 2700K/ 3000 K/ 3500 K/

4000 K/ 5000 K

WARRANTY

DALS offers a 5-year warranty from the date of purchase which covers repairs or replacement of defective parts of the housing, optics, and electronics. To contact DALS customer service call 1-877-430-1818 or send an e-mail to info@dals.com.

RECOMMENDED DIMMER LIST*						
BRAND	MODEL#	DIMMER SPECS	GRADE	DIMMING RANGE (%) MIN MAX	MAX LOAD	
Dals	SM-DIMSW Smart Dimmer	Triac, 250W LED/CFL	Compatible	0 100	250	
Lutron	DVCL-153PR-WH-C	Triac, 150 W Dimmable CFL/LED	Compatible	7 99	150	
Lutron	CTCL-153PDH-WH-C	Triac, 150 W Dimmable CFL/LED	Compatible	1 99	150	
Lutron	STCL-153PH-WH-C	Triac, 150 W Dimmable CFL/LED	Compatible	0 99	150	
Lutron	DVWCL-153PH-WHC	Triac, 150 W Dimmable CFL/LED	Compatible	0 99	150	
Lutron	MACL-153MRHW-WHC	Triac, 150 W Dimmable CFL/LED	Compatible	0 99	150	
Lutron	DVELV-300P-WH	300W electronic low voltage dimmer	Compatible	0 88	300	
Lutron	MA-PRO-WH	ELV, 250W LED/CFL	Compatible	0 99	250	
Lutron	Caseta PD-6WCL-WH-R-C	Triac, 300W Dimmable CFL/LED	Compatible	0 96	300	
Lutron	Caseta PD-5NE-WH-C	ELV, LED—up to 250 W	Compatible	0 100	250	
Lutron	Caseta	Triac, LED—up to 250 W	Compatible	0 100	250	
Leviton	6672-1LW	Triac, 150W Dimmable CFL/LED	Compatible	3 100	150	
Leviton	DSM10	Triac, 450W Dimmable CFL/LED	Compatible	3 100	450	
Leviton	6674	Triac, 150 W Dimmable CFL/LED	Compatible	2 99	150	
Leviton	IPL06-10Z	Triac, 150 W Dimmable CFL/LED	Compatible	6 98	150	
Leviton	DSL06-752	Triac, 150 W Dimmable CFL/LED	Compatible	6 98	150	
Leviton	D26HD-742-1RW	Triac, 300W LED/CFL	Compatible	0 100	300	
Legrand	RHCL453PNICCV4	Triac, 450W Dimmable CFL/LED	Compatible	5 99	450	
Legrand	ADTP703TUM4	Triac,450W Dimmable CFL/LED	Compatible	1 88	450	
Legrand	ADPD453LM2	Triac,450W Dimmable CFL/LED	Compatible	29 99	450	
Legrand	RHL373PW	Triac, 250W LED	Compatible	2 99	250	
Control 4	C4-APD120-WH	ELV, 120W LED	Compatible	0 100	120	

^{*} Minimal buzzing noise may occur with some dimmers