

A19 8.5W DIM. TITANIUM LED SERIES



PRO

8.5W REPLACES




60W Inc.

80% Energy Savings

\$157 Savings per lamp*

- ⌚ Omnidirectional: 330° beam angle
- ⌚ Exceptional efficacy 94 LPW in Warm White
- ⌚ 40% more energy savings than CFL
- ⌚ Comfortable warm diffused light
- ⌚ Natural A-lamp shape fits all applications
- ⌚ Ideal for lamps with shades




A19 PRODUCT FEATURES

This A19 meets the new ENERGY STAR V1.1 requirements for omnidirectional bulbs by providing 330° of evenly distributed light intensity. In the 135° to 180° zone, this lamp emits 65% more lumens than what is required by ENERGY STAR, providing a fuller light than other LED A-lamps.



Exceptional Efficacy

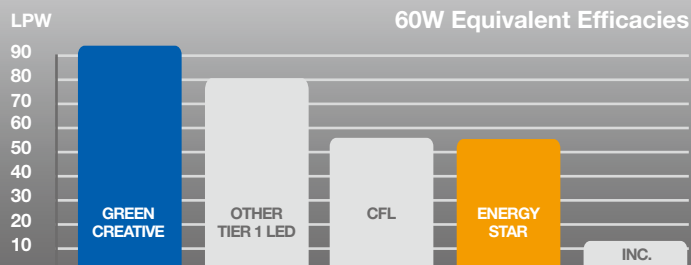

At 94 LPW, this lamp's efficacy is more than 15% higher than the Tier 1 LED A19 60W replacement industry average and exceeds new ENERGY STAR requirements by upwards of 65%. This energy-saving performance makes this lamp a smart retrofit choice for incandescent and CFL bulbs.

A19 8.5W DIM. TITANIUM LED SERIES

APPLICATIONS

General Lighting



Downlighting



Uplighting



Ref.#: DST18-A19-8.5W

SPECIFICATIONS

Product Model	57856 8.5A19DIM/827/R	57857 8.5A19DIM/830/R	57858 8.5A19DIM/840/R
Type	A19	A19	A19
Base	E26	E26	E26
Power (W)	8.5	8.5	8.5
Voltage - Frequency	120V 60Hz	120V 60Hz	120V 60Hz
Color Temp. (ANSI)	Soft White 2700K	Warm White 3000K	Cool White 4000K
CRI (Ra) (typ.)	80	80	80
Typical lumens (lm)	800	800	850
Efficacy (LPW)	94	94	100
Beam Angle	330°	330°	330°
Dimmable	Yes**	Yes**	Yes**
Power Factor	0.9	0.9	0.9
Rated Lifetime - L70 (hrs.)	25,000	25,000	25,000
Dia. x MOL	2.36"x4.35" (60x110mm)	2.36"x4.35" (60x110mm)	2.36"x4.35" (60x110mm)
Weight (lb. / g)	0.13lb. / 59g	0.13lb. / 59g	0.13lb. / 59g

* Savings per lamp based on \$0.11 / kw energy cost, 12 hrs / day lamp usage, \$2 incandescent with 1000-hr lifetime, \$11 LED with 25,000-hr lifetime

** List of tested dimmer switches available on website

*** Not intended for use in totally enclosed fixtures

**** Suitable for damp locations. Not for use where directly exposed to weather or water