



# LED Composite Inground (IL116) Specification Sheet

Project Name:	Location:	MFG: Philips Hadco
Fixture Type:	Catalog No.:	Qty:

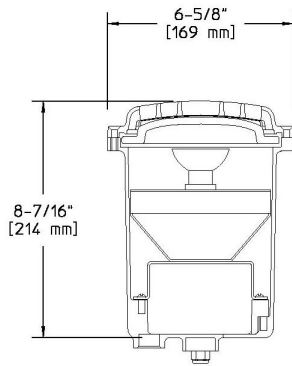

## Ordering Guide

Example: IL116 G H LED7 NF W

<b>Product Code</b>	IL116	LED Composite Inground
<b>Rock Guard</b>	G	Rock Guard *2
<b>Finish</b>	H	Bronze
	N	Natural Brass *1
<b>Source/Lumens</b>	LED7	7W LED
<b>Optics</b>	NF	Narrow Flood
	FL	Flood
<b>CCT</b>	W	Warm

\*1 Natural Cast Bronze

\*2 Rock Guard is not available in stainless steel.

\*3 Fixture will be shipped with lamp. Lamp not sold separately.

## Specifications

### HOUSING:

Single-piece compression molded fiberglass reinforced polyester composite, factory pressure tested to ensure water will not wick or leak through. Trim ring is a compression molded polyester.

### FINISH:

Composite is textured, pressure formed, molded-in-color.

### OPTICAL ASSEMBLY:

Clear convex, tempered soda-lime glass for high impact resistance. 2,200-pound live-load rated, standard walk-over lens. Lamps have 15° articulation either side of vertical and 358° rotation without interruption of beam pattern.

### LAMPING:

7W lamp with 25° or 35° beam spread, 25,000 hours life. Color temperature (CCT): Warm White (3,000K nominal). No Mercury. Dimmable. Approximately 460 lumens.

### ELECTRICAL ASSEMBLY:

Bi-pin socket type (GU5.3) with 250° C high temperature teflon coated wire leads. 12 Volt fixture is pre-wired with 3-ft pigtail of 18-2 AWG, 105° C, SPT-1W wire. Low voltage quick connector, catalog #LVC3 included for easy hook-up to the low voltage supply cable, not included. 12 Volt system requires remote transformer, not included.

### WARRANTY:

Five-year limited warranty.

### CERTIFICATIONS:

ETL listed to U.S. safety standards for wet locations. cETL listed to Canadian safety standards for wet locations. Manufactured to ISO 9001:2008 Standards. ADA Compliant when flush mounted with CP2 or CPS2.

### Height :

8 7/16" (214mm)

### Width:

6 5/8" (169mm)

### Max. Weight:

3.5 lb