


Hex Cell Louvre Adaptor

Cat. No. HCL



The Hex Cell Louvre Adaptor's main purpose is to protect the eye from the direct glare or sparkle effect from the lamp without dramatically changing the look of the luminaire. It also serves as a second lens receptacle for colour or special effect lenses (not supplied by Hunza™). It is supplied standard with a clear lens, the operating temperature of this lens is reduced by up to 30% compared to a luminaire that has no Hex Cell Louvre Kit installed.

Ordering Information

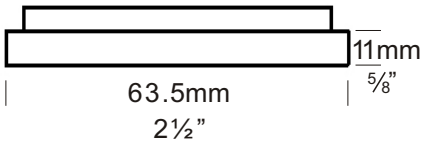

Luminaire Type

HCL - Hex Cell Louvre Adaptor

Material/Finish

- BK - Black
- BZ - Bronze
- GN - Green
- STAR - Silver Star
- WH - White
- WB - Birch
- DG - Dark Grey
- OG - Olive Green
- RG - Beige
- PR - Primrose
- COP - Copper
- SS - 316 Stainless Steel

Accessories

LENSSTEPF - Frosted Lens

Ordering Example HCL BK - Hex Cell Louvre Adaptor in Black

LENSSTEPF - Frosted Lens

(Accessories ordered separately)

HUNZA™ PURE OUTDOOR LIGHTING

HUNZA FACTORY
130 Felton Mathew Ave
Glen Innes
Auckland 1072
New Zealand

Ph: 64-9-528 9471
Fax: 64-9-528 9361
hunza@hunza.co.nz
www.hunza.co.nz

INTERNATIONAL CONTACTS:
www.hunza.co.nz/contacts.php

Specifications may change without notice.
Manufactured in New Zealand.
© 2011 Hunza Holdings Ltd.

Ver 1.4

Luminaire Construction

CNC machined from one of the following metals:

Aluminium: Hex Cell Louvre ring - high corrosion resistant 63.5mm (2½") x 10mm (25/64") aluminium with chromate substrate and high UV resistant polyester powder coat

Colours Black, Bronze, Green, Silver Star, White, Birch, Dark Green, Olive Green, Beige, Primrose.

Copper: Hex Cell Louvre ring - 63.5mm (2½") x 10.5mm (13/32") copper.

316 Stainless Steel: Hex Cell Louvre ring 63.5mm (2½") x 9mm (11/32").

Mounting

Screws on to the luminaire body, the lens ring or flange (depending which luminaire) is then screwed to Hex Cell Louvre Adaptor. The IP (water protection) rating of the luminaire is not affected when a Hex Cell Louvre Adaptor is fitted.

Features

Hex Cell:

Matt black aluminium to reduce glare.

Gasket:

Silicone, iron impregnated 220°C (428°F).

Dual Lens:

A second lens is fitted e.g. a colour lens or a frosted lens, a clear is supplied as standard.

Lens Operating Temperature:

The operating temperature of the second lens is reduced by up to 30%.

Suitable for use with:

Floor Lite and Floor Lite Square, Clover, Cross, Grill, Spot, Pillar & Pillar Retro™, Pond, Pool, NPS Spot, Spike Spot & Spike Adjustable, Single Pole and Single Pole Retro™, Step and Step Lite Square, Step Eyelid and Step Lite Eyelid Square, Solid Eyelid and Solid Eyelid Square, Twin Bar, Twin Pole and Twin Pole Retro™, Twin Wall Spot and Twin Wall Spot Retro™, Wall Down Lite & Wall Down Lite Retro™, Wall Spot & Wall Spot Retro™ and Hanging Lite.

Accessories:

Frost lens (Cat. LENSSTEPF).

Standards

IP66/IP68



UL1838

Weight

Alum .040kg (1.4oz)

Cop .105kg (3.5oz)

SS .100kg (3.5oz)