

# Ponte 5 Wall

700WSPNT5\_

1.1

## VISUAL COMFORT & Co.

MODERN COLLECTION

### GENERAL PRODUCT INFORMATION:

This product is suitable for damp locations.

These fixtures are intended to be installed utilizing NEC compliant junction boxes.

This product can be dimmed with most ELV, TRIAC or 0-10V dimmers.

This instruction shows a typical installation.




### CAUTION - RISK OF FIRE

This product must be installed in accordance with the applicable installation code by a person familiar with the construction and operation of the product and the hazards involved.

**Use minimum 90°C supply conductors.**

### SAVE THESE INSTRUCTIONS!

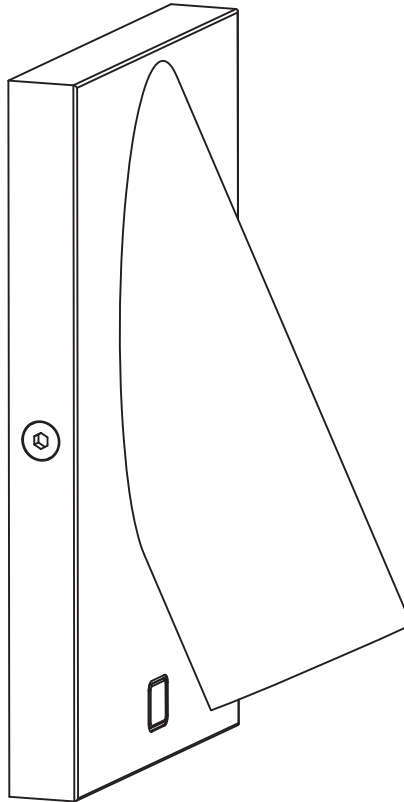

VISUAL COMFORT & Co.


7400 Linder Ave., Skokie, IL 60077

T 847.410.4400 | F

847.410.4500

[www.visualcomfort.com](http://www.visualcomfort.com)

# Install the Fixture

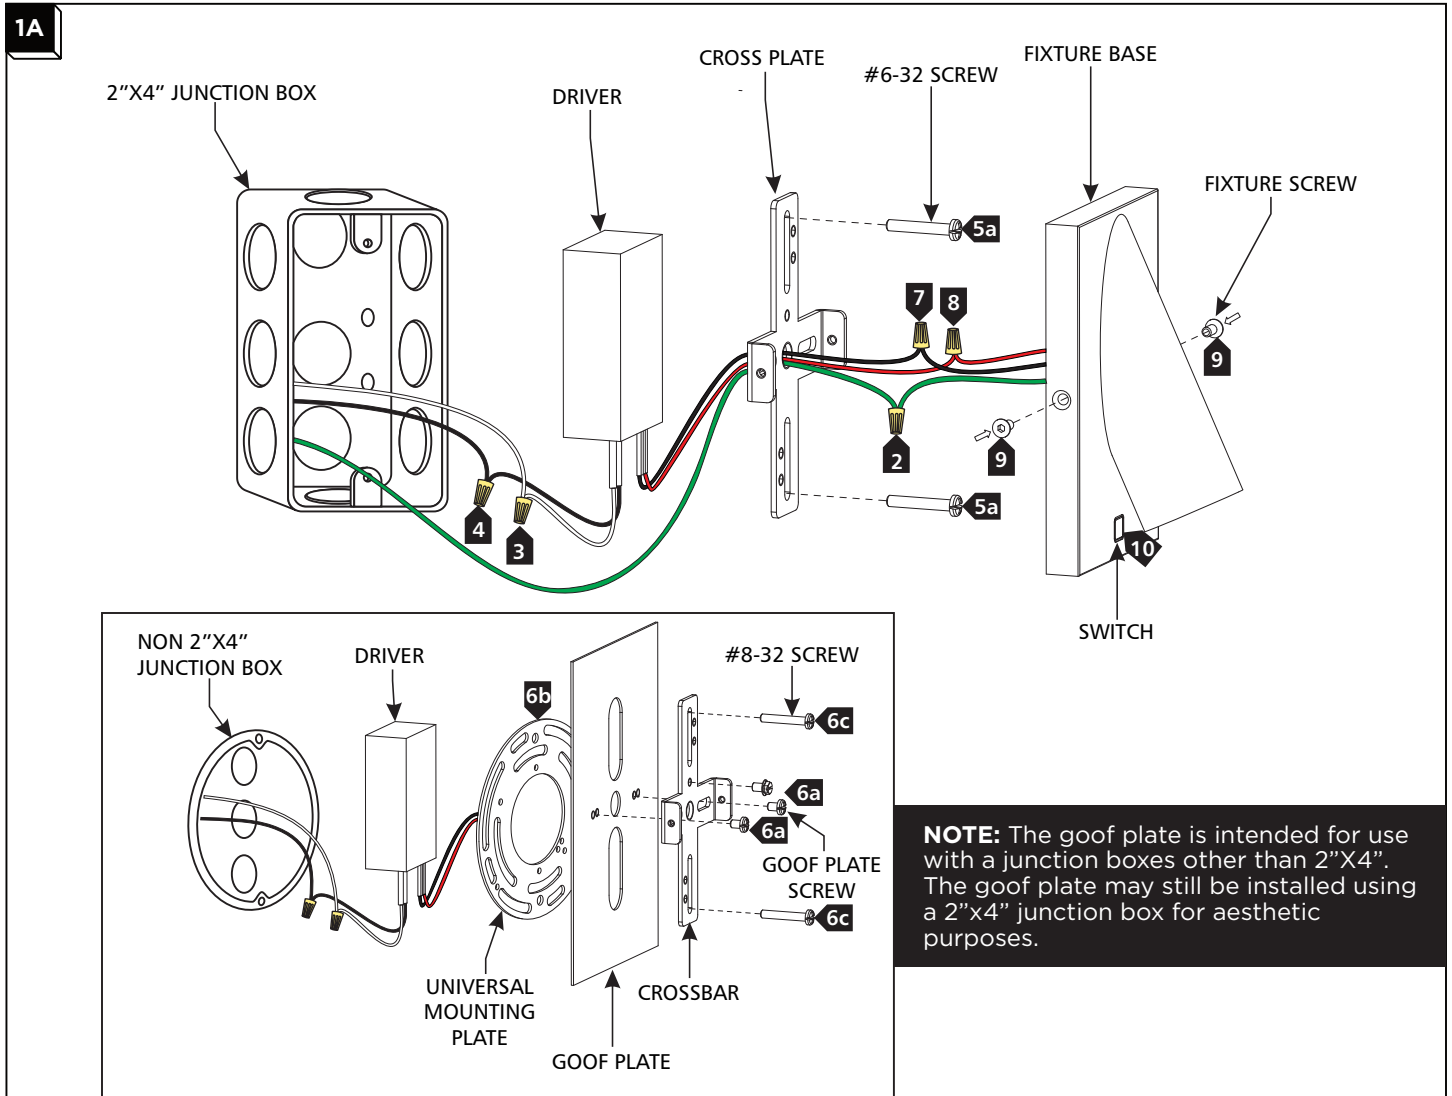

- **1** Remove the fixture screws from the fixture base and remove the crossbar.
- **2** Ground the fixture in accordance with local electrical codes.
- **3** Connect the white driver input wire to the neutral power line with a wire nut.
- **4** Connect the black driver input wire to the hot power line with a wire nut.
- **5** **2"X4" junction box installation:**
  - **a** Place the driver inside the junction box, leaving the driver output wires available, and secure the uni to the junction box using #6-32 screws. Skip to step 7.
- **6** **Junction box other than 2"X4" installation:**
  - **a** Assemble the crossbar and the goof plate using the goof plate screws.
  - **b** Place the driver inside the junction box, leaving the driver output wires available, and secure the universal mounting plate to the junction box ensuring that the mounting holes that align with the crossbar are vertically level.
  - **c** Feed the driver input wires through the center hole of the goof plate/crossbar assembly and secure it to the universal mounting plate with the #8-32 screws.
- **7** Connect negative (-) fixture wire to the negative (-) driver output wire with a wire nut.
- **8** Connect positive (+) fixture wire to the positive (+) driver output wire with a wire nut.
- **9** Properly place all wires and wire nut connections into the junction box or fixture base, mount the fixture base onto the crossbar and secure it in place with the fixture screws.
- **10** Use the switch to turn the fixture on/off and to change dimming levels by pressing the switch.