

# Greenwich 9-Light Chandelier

3167109 | 1.0

VISUAL COMFORT & Co.

STUDIO COLLECTION

## GENERAL PRODUCT INFORMATION:

These fixtures are intended to be installed utilizing NEC compliant junction boxes.

This product is safety listed for damp locations.

Incandescent version may be dimmed with a standard incandescent dimmer. LED version may be dimmed with a LED dimmer. Consult lamp manufacturer for additional information.


This instruction shows a typical installation.

### CAUTION - RISK OF FIRE

This product must be installed in accordance with the applicable installation code by a person familiar with the construction and operation of the product and the hazards involved.

Use minimum 90°C supply conductors.

**SAVE THESE INSTRUCTIONS!**

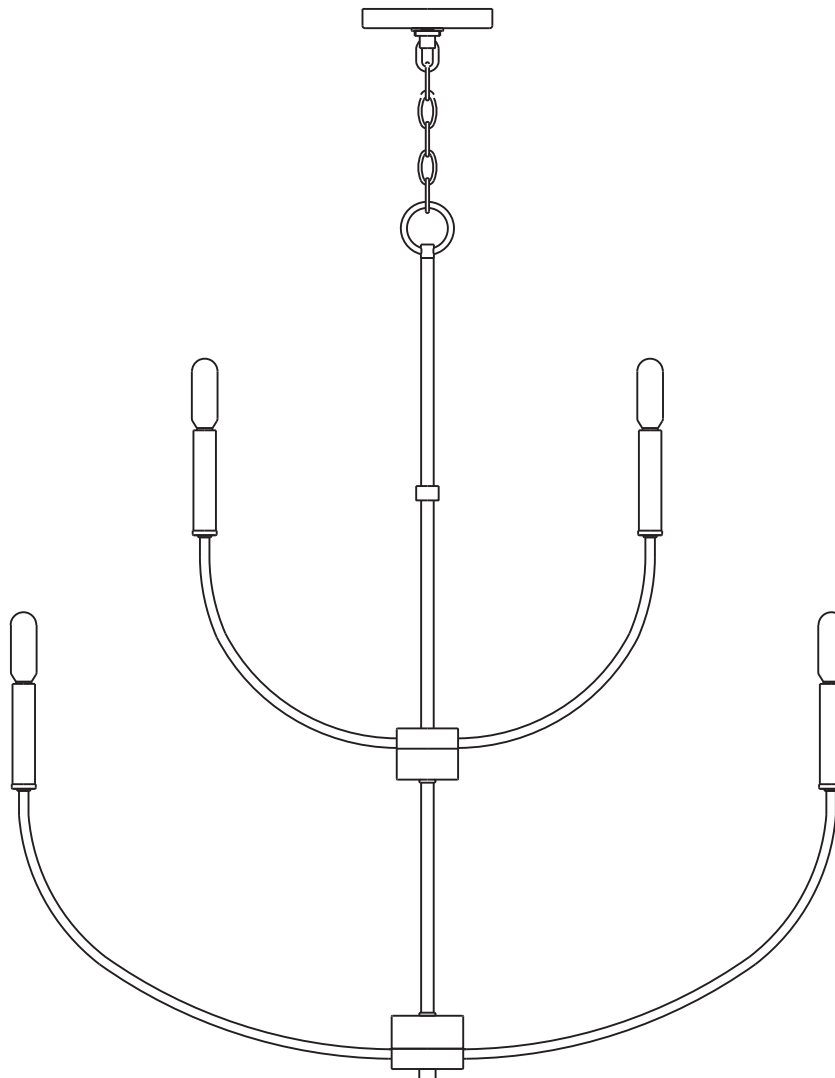

VISUAL COMFORT & Co.


7400 Linder Ave., Skokie, IL 60077

T 847.410.4400 | F

847.410.4500

[www.visualcomfort.com](http://www.visualcomfort.com)

# Install the Fixture

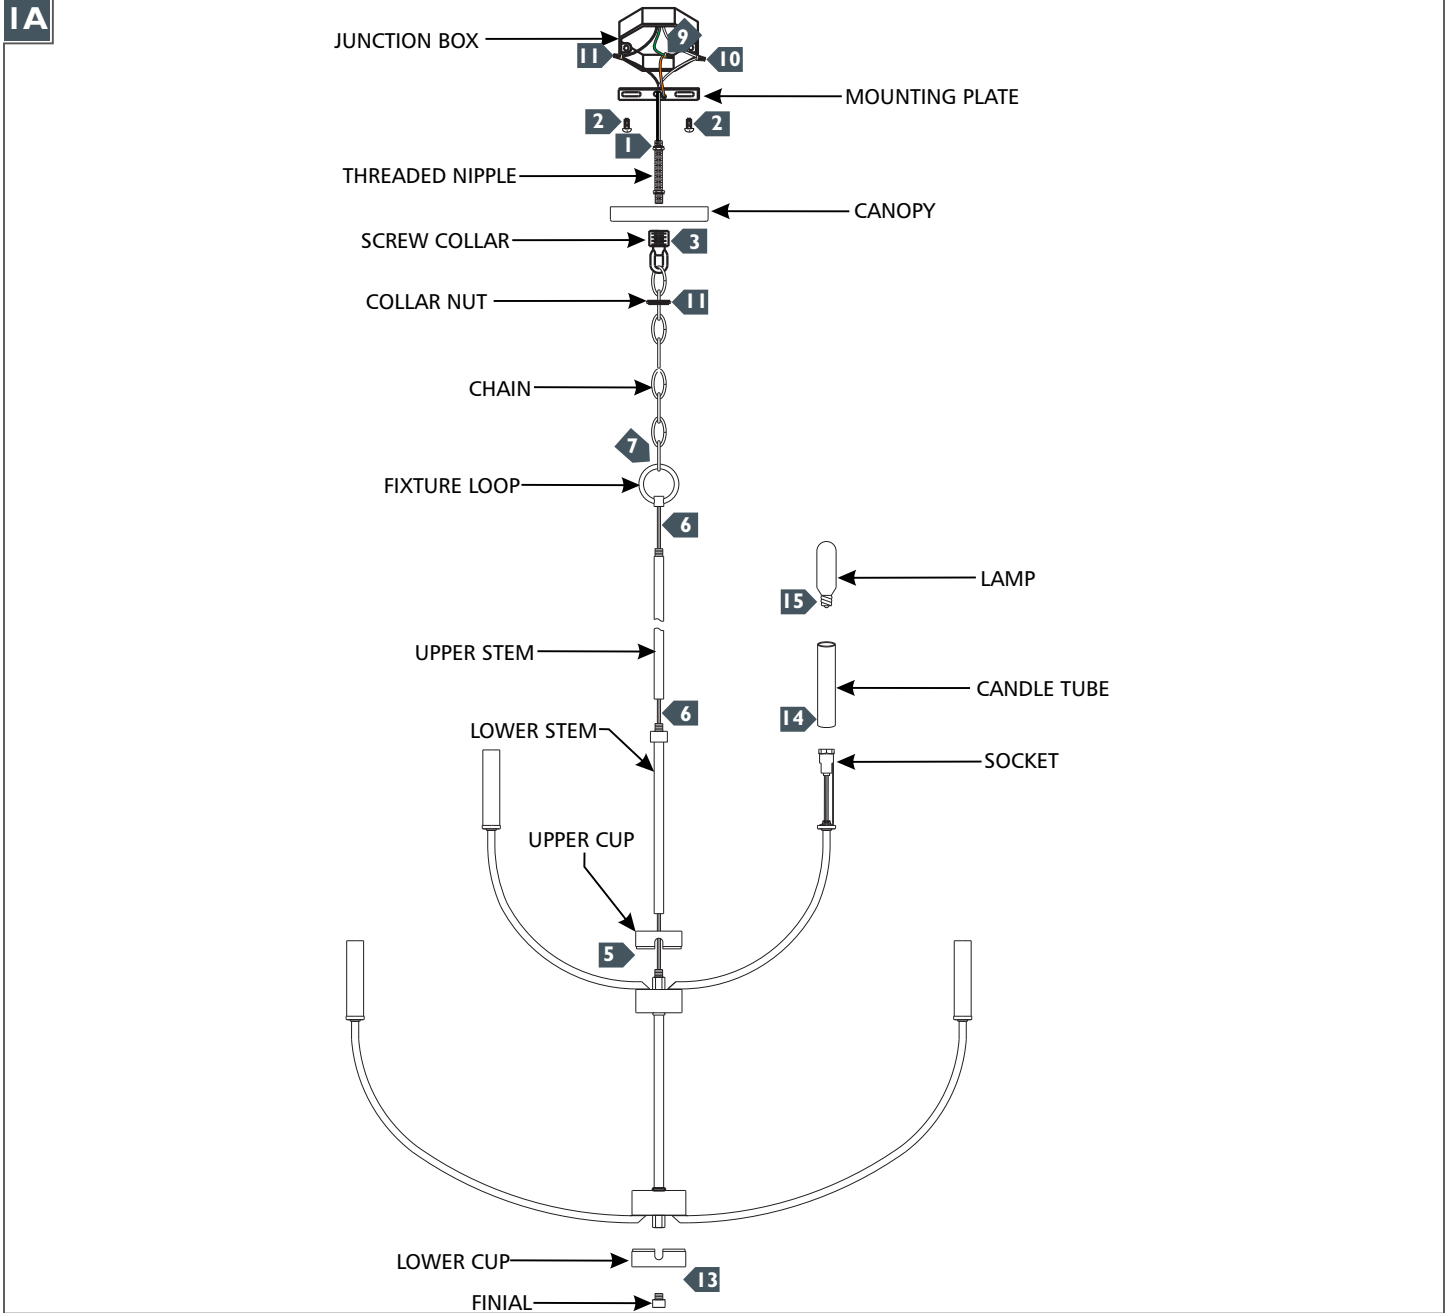

- 1** Screw the shorter end of the threaded nipple tightly onto the mounting plate.
- 2** Secure the mounting plate to the junction box.
- 3** Temporarily unscrew and remove the collar nut and screw the screw collar tightly onto the threaded nipple.
- 4** Determine the wanted height of the fixture and remove a portion of the chain by opening a link and removing it from the bottom.
- 5** Feed the fixture wires through the upper cup and the lower stem, then secure them by screwing the lower stem to the fixture.
- 6** Screw the upper stem onto the fixture loop, feed the fixture wires through the stem/fixture loop assembly and screw it onto the lower stem.
- 7** Install the collar nut and canopy onto the chain (in that order), then install the open link onto the fixture loop and secure it in place by closing the link.
- 8** Weave the cord through the chain, screw collar, canopy, threaded nipple, and out of the junction box. Trim the cord leaving enough to make electrical connections.
- 9** Connect the fixture to a suitable ground in accordance to local electrical codes.
- 10** Connect the white fixture wire (square and/or rigid) to the neutral power line wire with a wire nut.
- 11** Connect the black fixture wire (round and/or smooth) to the hot power line wire with a wire nut.
- 12** Neatly place all the wires into the junction box, place the canopy onto the ceiling, and secure it in place by screwing the collar nut tightly onto the screw collar.
- 13** Install the lower cup onto the fixture and secure it in place by screwing in the finial.
- 14** Install the candle tubes by sliding them over the sockets.
- 15** Screw the lamps into the sockets. Refer to the label on the socket for Max Wattage information.