



HAYWARD MEDIUM & LARGE PENDANTS

LP1111; LP1121

General Product Information

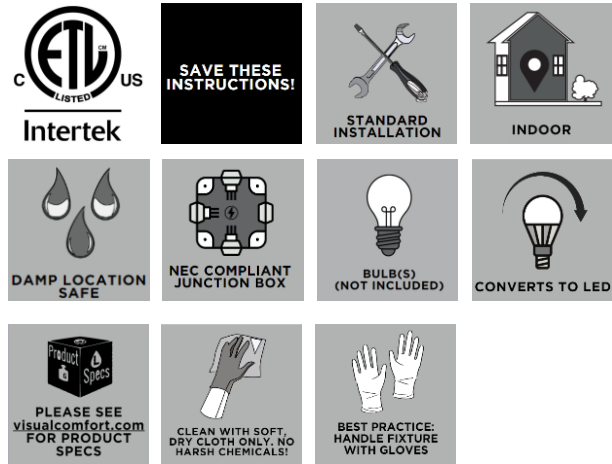

Tools Required



Safety Information

CAUTION-RISK OF FIRE



This product must be installed in accordance with the applicable installation code by a person familiar with the construction and operation of the product and the hazards involved.


USE MINIMUM 90°C SUPPLY CONDUCTORS.



Turn off electrical current at the source before working with any lighting fixture or portable lamp.

Install and use this product in adherence with local electrical codes and regulations.

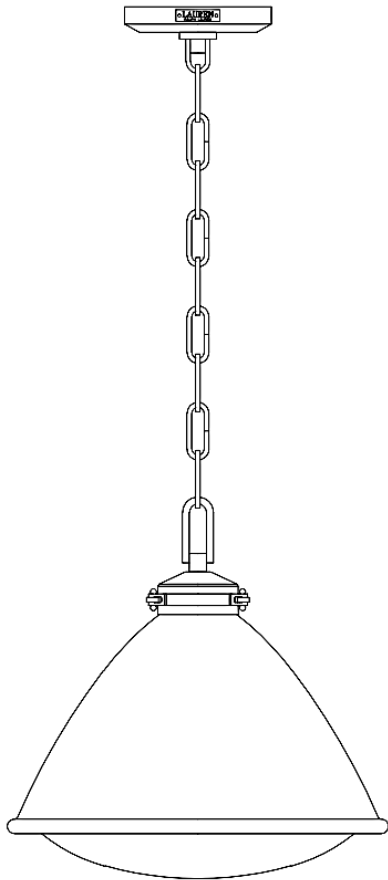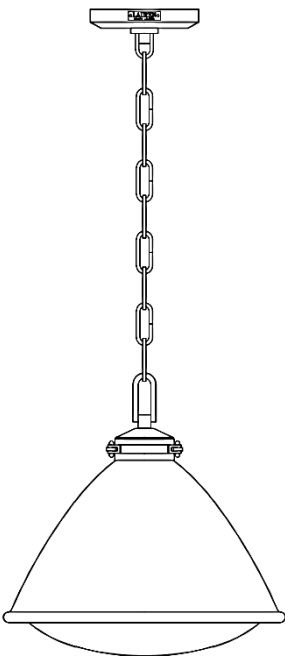

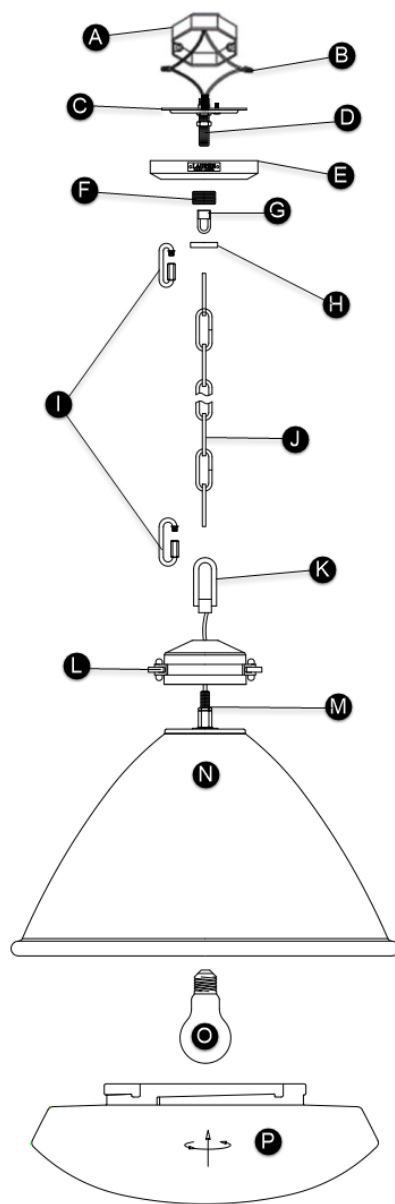

FIXTURE PARTS

- A. Junction Box
- B. Wire Nuts
- C. Mounting Bar
- D. Threaded Nipple
- E. Canopy
- F. Screw Collar
- G. Canopy Loop
- H. Collar Nut
- I. Quick Links
- J. Chain
- K. Fixture Loop
- L. Shade Holder
- M. Socket
- N. Top Shade
- O. Blub (Not Included)
- P. Bottom Shade

INSTRUCTIONS

I. Preparing the Fixture

1. If necessary, screw the short end of the threaded nipple tightly onto the mounting bar. Screw the screw collar on the threaded nipple.
2. Unscrew the collar nut from the screw collar.
3. Secure the mounting bar to the junction box.
4. Determine desired overall length and amount of chain needed. Shorten chain using chain pliers. (Keep extra chain).
5. Feed the fixture wires from the socket through the top shade and shade holder and secure them in place with the fixture loop.
6. Install light bulbs into the sockets. Refer to the label on the socket for Max Wattage Information.
7. Install bottom shade to top shade.
8. Install the chain to the fixture loop with a quick link. Secure the quick link.
9. Slide the collar nut and canopy down the chain gently. Install the chain to the canopy loop with a quick link.
10. Weave the wire through the chain, collar nut and canopy.

II. Wiring the Fixture

1. Safety first! Locate the circuit breaker and switch it off to cut off the power supply to the relevant circuits to ensure there's no electricity running through the wiring.
2. In accordance with local electrical codes, connect the fixture ground wire (bare copper or silver wire) to suitable ground. This may be a green ground screw on the mounting plate or a house wire (green or bare copper wire without insulation).
3. Twist the bare ends of the following pairs of wires together using a wire nut to secure a connection:
 - a) Hot fixture wire (black, smooth) and hot power line wire from the junction box (hot to hot)
 - b) Neutral fixture wire (white, textured) and neutral power line wire from the junction box (neutral to neutral)
4. Carefully tuck all wires into the junction box.

III. Installing the Fixture

1. Slide the canopy over the mounting plate and secure it in place with the collar nut.