


# Instruction guide

## COUNTER-BALANCE

CONSULT A QUALIFIED ELECTRICIAN BEFORE INSTALLATION.

READ AND SAVE THESE INSTRUCTIONS.

### PACKAGE CONTENT

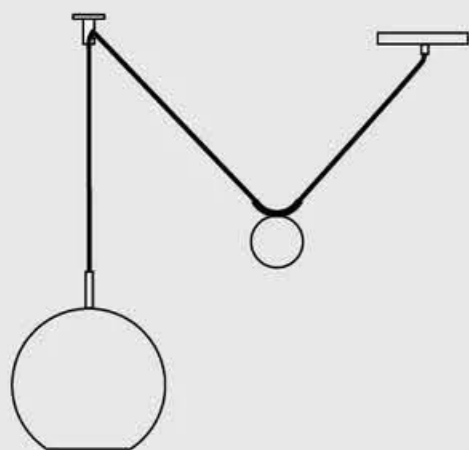

#### WARNING

It's recommended that you consult a qualified electrician before installation.

### HARDWARE CONTENT



COUNTERWEIGHT  
QTY:1



CANOPY HARWARE KIT  
QTY:1



SWAG HOOK KIT  
QTY:1

### SAFETY INFORMATION

READ AND SAVE THESE INSTRUCTIONS

#### DANGER

For your protection and safety, carefully read and understand the information provided in this manual completely before attempting to assemble, install or operate this product. Failure to do so could lead to electrical shock, fire or other injuries that could be hazardous or even fatal.

**DO NOT** connect this fixture to an electrical system that does not provide a means for equipment grounding. Never use a fixture in a two-wire system that is not grounded. Installing a fixture into an electrical system not having a proper grounding means could cause metal parts of the fixture to carry electrical currents if any of the fixture wires, wire connections or splices were to become broken, cut or loose during the mounting or normal operation of the fixture. Under this condition, anyone coming in contact with the fixture would be subject to electrical shock, which could cause serious injury or death.

**DO NOT** connect the bare or green insulation fixture ground wire to the black (HOT) current-carrying wire or the white (NEUTRAL) house wire. Connection of these wires may cause metal parts of the fixture to carry electrical currents. Under this condition anyone coming in contact with the fixture would be subject to electrical shock, which could case serious injury or death.

**DO NOT** damage or cut the wire insulation (covering) during installation of fixture. **DO NOT** permit wires to contact any surface having a sharp edge. To do so may damage or cut the wire insulation, which could cause serious injury or death from electrical shock.

#### WARNING

All electrical connections must be in agreement with local codes and ordinances, the National Electric Code (NEC) and ANSI/NFPA 70-1999. Contact your municipal building department or learn about your local codes, permits and /or inspections. To avoid personal injury, the use of gloves may be necessary while handling fixture parts with sharp edges.

Help us spread the word by posting your Dounia Home Light to social media and tagging us **@DouniaHome #douniahome**

# Instruction guide

## COUNTER-BALANCE (contd.)

CONSULT A QUALIFIED ELECTRICIAN BEFORE INSTALLATION.  
READ AND SAVE THESE INSTRUCTIONS.

**DO NOT** suspend any fixture by the house wires. A fixture must always be mounted directly to a crossbar that is first attached to the outlet box. All fixtures must be mounted to an outlet box that is supported by the building structure. Wire connectors will not support the weight of a fixture. Suspending a fixture by the house wires and wire connectors could result in the fixture falling, with the possibility of personal injury and the danger of electrical shock or fire. To reduce the risk of fire, electrical shock or personal injury, wire connectors provided with this light fixture are designed to accept only one 12-gauge house wire and two lead wires from the light fixture. If your house wire is larger than 12-gauge or there is more than one house wire to connect to the corresponding fixture lead wires, consult an electrician for the proper size wire connectors to use.

### CAUTION

Turn OFF ELECTRICITY at main fuse box (or circuit breaker box) before beginning installation by removing the fuse (or switching the circuit breaker off). If you are not sure the lighting system has a grounding means, do not attempt to install this fixture. Contact a qualified, licensed electrician

for information regarding the proper grounding methods as required by the local electrical code in your area.

**DO NOT** use bulbs having a wattage greater than the maximum value stated on the fixture. The use of bulbs with higher wattage than specified will increase temperatures and risk of fire.

If a dimmer control switch is used with this fixture, obtain professional advice to determine the correct type to use as well as the electrical rating required. Risk of fire - most dwellings built before 1985 have supply wire rated for 140F/60C. Consult a qualified electrician before installation.

### PREPARATION

Before beginning assembly of product, make sure all parts are present. Compare parts with packaging contents list and hardware contents list. If any part is missing or damaged, do not attempt to install, operate or assemble product.

**(Estimated assembly time: 30-60 minutes)**

Tools Required for Assembly (not included): Flathead Screwdriver, Phillips Screwdrivers, Wire Strippers, Pliers, Wire Cutters, Safety Glasses, Stepladder, Electrical Tape.

### CARE & MAINTENANCE

Shut off main power supply. Wipe fixture with only soft cloth.

**DO NOT** use brass cleaner on the fixture. The fixture has been sealed with a brass seal to prevent it from oxidation.

**DO NOT** take anything sharp to the fixture, if the varnish comes off the shade might oxidize and will not be replaced or refunded.

### TROUBLESHOOTING

**WARNING** before beginning work, shut off the power supply to avoid electrical shock.

PROBLEM	POSSIBLE CAUSE	CORRECTIVE ACTION
Bulb will not light.	a. Bulb is burned out. b. Power is off. c. Faulty connection.	a. Replace light bulb. b. Make sure power supply is ON. c. Check wiring and all connections.
Fuse blows out or circuit breaker trips.	a. Crossed wires. b. Power wire is grounding out.	a. Check wiring. b. Check all connections.

### WARRANTY

All our light fixtures are handmade therefore some irregularity in the etching, drilling or seal may occur. We do not refund any purchases for this reason. We only warrant the light shade and the canopy against oxidation within 1 year from the date of purchase. If within this period the shade or the canopy is found to oxidize, take a copy of the bill of sale as a proof of purchase and the product in its original carton to the place of purchase. The store will, at its option, repair, replace or refund the purchase price to the consumer. Hardware, cord and bulb are not under warranty. All costs of installation and removal of the fixture is the responsibility of the consumer. This warranty does not cover fixture becoming defective due to misuse. Accidental damage or improper handling and/or installation and specifically excludes liability for direct, incidental or sub-sequential damages. As some states do not allow exclusions of limitation on an implied warranty, the above exclusion and limitation may not apply. This warranty gives you specific rights and you also have other rights which may vary from state to state.

Help us spread the word by posting your Dounia Home Light to social media and tagging us @DouniaHome #douniahome

# Instruction guide

## COUNTER-BALANCE (contd.)

CONSULT A QUALIFIED ELECTRICIAN BEFORE INSTALLATION.  
READ AND SAVE THESE INSTRUCTIONS.

### INSTALLATION INSTRUCTIONS

1/ Turn off circuit breakers and wall switch to the fixture supply line leads. Remove existing fixture and disconnect all electrical wiring.

**DANGER:** Failure to disconnect power supply prior to installation may result in serious injury or death.

2/ Feed the fixture cable through the counterweight, and then through the canopy. Determine the amount of swag you would like your fixture to have.

3/ Determine the ideal location for the swag hook. Hammer the anchor into your ceiling or wall until it reaches the threaded portion of the anchor. Then with a screwdriver, twist the rest of the anchor into the ceiling or wall. The anchor should be flush with the surface.


**CAUTION:** Make sure the outlet box can support 35 lbs. hanging weight. Use metal outlet box; plastic outlet boxes are not recommended.

- 4/ Next take the backplate and screw and mount the backplate to your ceiling by inserting the screw into the anchor.
- 5/ Thread the swag hook onto the backplate, make sure that the set screw is fully loosened to avoid interference with the backplate threading. Then, take your allen wrench and secure your swag hook to the backplate.
- 6/ Feed the cord through the hook and, determine the ideal length for your fixture. Then gently secure it with the additional set screw to lock in the swag position.
- 7/ Attach the crossbar to the outlet box (not included) using existing screws. Connect white house wire from outlet box to white wire from fixture using wire connector. Connect black house wire from outlet box to black wire from fixture using wire connector.

**NOTE:** Screw wire connectors on in a clockwise direction.

- 8/ Wrap electrical tape around each individual wire connector down to the wire.
- 9/ Carefully arrange excess wiring and wire connectors within canopy at top of fixture. Align the crossbar with the holes in the canopy. Hold the canopy flush with the ceiling and secure it to the crossbar using the screws provided.
- 10/ Use the cord strain relief screw to tighten the cord in place. **CAUTION:** DO NOT over-tighten cord strain relief.
- 11/ Install 1 standard-base 60-watt max LED bulb included.

**CAUTION** when replacing bulbs, please allow bulb and metal shade to cool down before touching. Restore power and test fixture (A). If lights do not function, please refer to troubleshooting section.

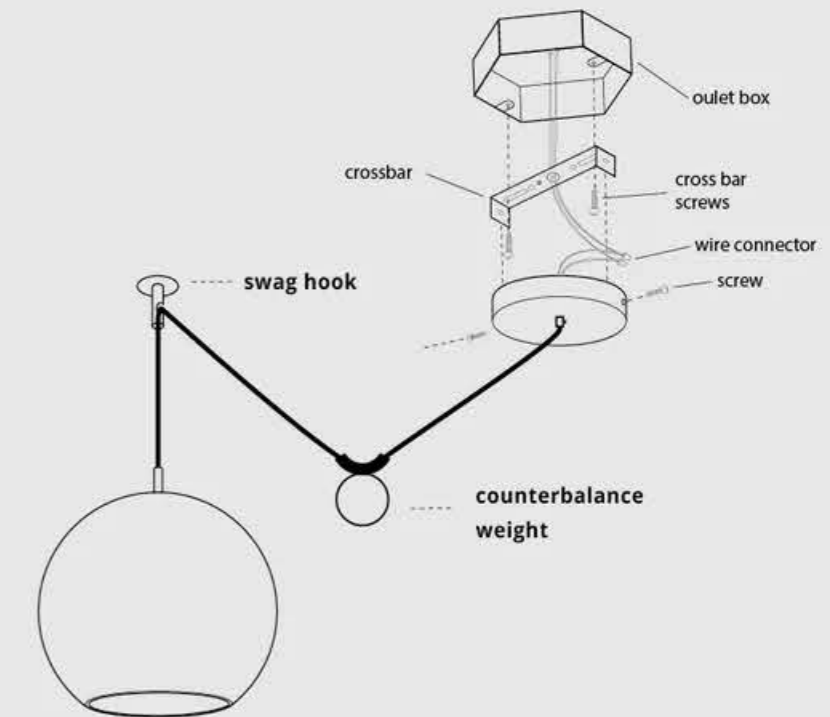

Help us spread the word by posting your Dounia Home Light to social media and tagging us @DouniaHome #douniahome