



# TRAC-MASTER®

Avant Garde


## CYLINDRA™ SERIES

T841, T844, T845 and T846

Project: \_\_\_\_\_  
 Fixture Type: \_\_\_\_\_  
 Location: \_\_\_\_\_  
 Contact/Phone: \_\_\_\_\_

### PRODUCT DESCRIPTION

The contemporary styling of the Cylindra fixture enables it to subtly enhance practically any decor without diverting attention from the surrounding environment. Soft curved surfaces combine with clean, crisp edges to provide a uniquely attractive aesthetic. Cylindra's integral, bayonet-mounted accessory holder accommodates up to two accessories simultaneously.

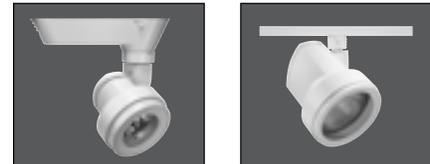

### Low Voltage MR16

**Construction** Die cast aluminum housing.

**Lamp** 12V, 50W maximum MR16 GU5.3/GX5.3 bi-pin.

**Socket** Ceramic bi-pin.

**Accessory Holder** Integral to fixture design • Die cast aluminum construction • Precision bayonet mounting • Accommodates up to two accessories simultaneously • Clear glass lens included with fixture.




**Transformer** Must be ordered separately • Compatible with T537 or T538 12V electronic transformer for halogen lamps (D1.2.1) • Compatible with T537U universal 12V electronic transformer for LED or halogen lamps (D1.2.5) • Compatible with T539 12V electronic transformer for halogen lamps (D1.2.0) • Compatible with T542 or T543 12V magnetic transformer for LED or halogen lamps (D1.2.0).

**Aiming** 360° horizontal rotation • 105° vertical aiming capability.

**Labels** UL and C-UL Listed.

Product specifications subject to change without notice.

Catalog Number	Finish	Lamp
T841WH	White	50W MR16 max.
T841BL	Black	50W MR16 max.
T841SL	Silver	50W MR16 max.

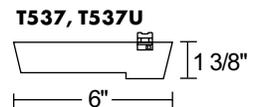

### ACCESSORIES

Cat. No.	Description	Cat. No.	Description	Cat. No.	Description
T741-6	Color Filters	T7477	Prismatic Spread Lens	T7478	Linear Spread Lens
T7401-18	Dichroic Filters	T7420	Diffusion Lens	T7421	Uniformity Lens
T7422	UV Filter	T7459BL	Hexcell Louver		

See specification sheet [D1.2.2](#) for details.

### Line Voltage PAR20

**Construction** Die cast aluminum housing.

**Lamp** 120V, 50W maximum PAR20 medium base.

**Socket** Medium base porcelain with nickel plated copper screw shell.

**Adapter** Copper alloy contacts provide precise spring action - no arcing and will not take a set • True, positive electrical ground • On/off switch included • Patented embossed polarity arrows on bottom of adapter • Spring-loaded positive latch with embossed polarity arrows secures trac light to trac • "Pull-up" contact to up position for two-circuit application.


**Accessory Holder** Integral to fixture design • Die cast aluminum construction • Precision bayonet mounting • Accommodates up to two accessories simultaneously.

**Aiming** 360° horizontal coverage • 105° vertical aiming capability.

**Labels** UL and C-UL Listed.

Product specifications subject to change without notice.

Catalog Number	Finish	Lamp
T844WH	White	50W PAR20 max.
T844BL	Black	50W PAR20 max.
T844SL	Silver	50W PAR20 max.

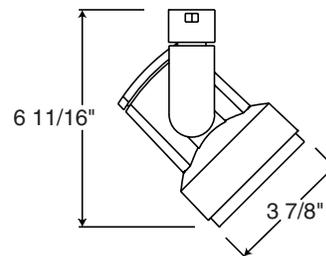

### ACCESSORIES

Cat. No.	Description	Cat. No.	Description	Cat. No.	Description
T591-6	Color Filters	T597	Prismatic Spread Lens	T598	Linear Spread Lens
T5928BL	Cube Cell Louver	T5918	Color Correction Filter	T5921	Uniformity Lens
T5922	UV Filter				


See specification sheet [D1.2.2](#) for details.

**TRAC-MASTER®**

Avant Garde

**CYLINDRA™ SERIES****T841, T844, T845 and T846****Line Voltage PAR30****Construction** Die cast aluminum housing.**Lamp** 120V, 75W maximum PAR30 medium base.**Socket** Medium base porcelain with nickel plated copper screw shell.**Adapter** Copper alloy contacts provide precise spring action - no arcing and will not take a set • True, positive electrical ground • On/off switch included  
• Patented embossed polarity arrows on bottom of adapter • Spring-loaded positive latch with embossed polarity arrows secures trac light to trac  
• "Pull-up" contact to up position for two-circuit application.**Accessory Holder** Integral to fixture design • Die cast aluminum construction  
• Precision bayonet mounting • Accommodates up to two accessories simultaneously.**Aiming** 360° horizontal coverage • 105° vertical aiming capability.**Labels** UL and C-UL Listed.

Product specifications subject to change without notice.




Catalog Number	Finish	Lamp
<b>T845WH</b>	White	75W PAR30 max.
<b>T845BL</b>	Black	75W PAR30 max.
<b>T845SL</b>	Silver	75W PAR30 max.

**ACCESSORIES**

Cat. No.	Description	Cat. No.	Description	Cat. No.	Description
<b>T561-6</b>	Color Filters	<b>T5677</b>	Prismatic Spread Lens	<b>T5678</b>	Linear Spread Lens
<b>T569BL</b>	Cube Cell Louver	<b>T5618</b>	Color Correction Filter	<b>T5621</b>	Uniformity Lens
<b>T5622</b>	UV Filter				

See specification sheet [D1.2.2](#) for details.**Line Voltage PAR38****Construction** Die cast aluminum housing.**Lamp** 120V, 150W maximum PAR38 medium base.**Socket** Medium base porcelain with nickel plated copper screw shell.**Adapter** Copper alloy contacts provide precise spring action - no arcing and will not take a set • True, positive electrical ground • On/off switch included  
• Patented embossed polarity arrows on bottom of adapter • Spring-loaded positive latch with embossed polarity arrows secures trac light to trac  
• "Pull-up" contact to up position for two-circuit application.**Accessory Holder** Integral to fixture design • Die cast aluminum construction  
• Precision bayonet mounting • Accommodates up to two accessories simultaneously.**Aiming** 360° horizontal coverage • 105° vertical aiming capability.**Labels** UL and C-UL Listed.

Product specifications subject to change without notice.

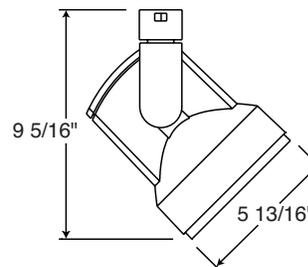

Catalog Number	Finish	Lamp
<b>T846WH</b>	White	150W PAR38 max.
<b>T846BL</b>	Black	150W PAR38 max.
<b>T846SL</b>	Silver	150W PAR38 max.

**ACCESSORIES**

Cat. No.	Description	Cat. No.	Description	Cat. No.	Description
<b>T571-6</b>	Color Filters	<b>T579BL</b>	Cube Cell Louver	<b>T5718</b>	Color Correction Filter
<b>T5721</b>	Uniformity Lens	<b>T5722</b>	UV Filter	<b>T5777</b>	Prismatic Spread Lens
<b>T5778</b>	Linear Spread Lens				

See specification sheet [D1.2.2](#) for details.