



5" SHALLOW UNIVERSAL IC REMODEL HOUSING

INCANDESCENT LAMPS

IC25R


Project: _____

Fixture Type: _____

Location: _____

Contact/Phone: _____

PRODUCT DESCRIPTION

IC Air-Loc® Remodel Housing • Energy efficient, sealed housing
 • IC Remodel Housing for remodel application where back side of ceiling is not accessible • Installs through an opening in the ceiling from below • Secured in place by factory installed remodel springs
 • Can be completely covered with insulation • When used with Air-Loc Gasket (see accessories), stops infiltration and exfiltration of air, reducing heating and cooling costs • Trims shown with Air-Loc symbol  do not require a gasket.

PRODUCT SPECIFICATIONS

Lamp Lamp ratings based on trim selected—see reverse.

Socket Medium base porcelain with nickel-plated copper screw shell • Floating socket with spring attaches to trim for installation.

Trims Trim selection shown on reverse.

Labels UL/cUL listed for through branch-wiring, damp locations and IP • Product thermally protected against improper use of lamps
 • Union made • UL and cUL Listed • Trim No. 212N is wet location approved for covered ceiling applications • Trims 275 and 276 are wet location approved for covered ceiling applications, **when used with outdoor rated PAR lamps.**

Testing All reports are based on published industry procedures; field performance may differ from laboratory performance.

Product specifications subject to change without notice.

INSTALLATION



Junction Box Pre-wired junction box, UL/cUL Listed for through-branch wiring maximum 4 No. 12 AWG 90° C branch circuit conductors (2 in, 2 out) • Junction box provided with removable access plate, (5) ½" knockouts, (4) Non-metallic sheathed cable connectors and ground wire • Knockouts equipped with pryout slots.

Housing IC housing, .032" aluminum sealed for Air-Loc Compliance • Remodel springs accommodate up to 1 ½" ceiling thickness.

PRODUCT CODES

Catalog Number	Input Voltage	Lamp Rating (max.)
IC25R	120V	R20/PAR20/BR30/PAR30/PAR30L (See reverse for max. trim rating)

DIMENSIONS

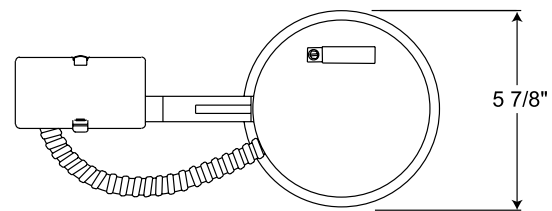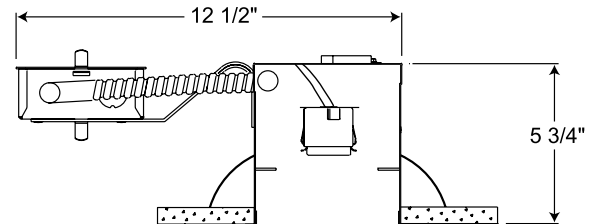

5 1/2" CEILING CUTOUT

ACCESSORIES

Catalog No.	Description
ALG5R	Air-Loc Gasket












To order, specify catalog number.

5" SHALLOW UNIVERSAL IC REMODEL HOUSING

INCANDESCENT LAMPS

IC25R

TRIMS/LAMPS


	Cat. No.	Description	Max. Lamp Rating
	 275B-WH ♦♦ 275W-WH ♦♦	Shallow Baffle - Black Shallow Baffle - White	50W BR30, 50W PAR30, 50W PAR30L
	 276B-WH ♦♦ 276C-WH ♦♦ 276HZ-WH ♦♦ 276WHZ-WH ♦♦ 276W-WH ♦♦	Shallow Cone - Black Alzak® Shallow Cone - Clear Alzak® Shallow Cone - Haze Shallow Cone - Wheat Haze Shallow Cone - White	50W BR30, 50W PAR30, 50W PAR30L
	 208NB-WH 208NW-WH	Eyeball with Black Baffle Eyeball with White Baffle	50W PAR20/R20
	 529-WH 529-SC 529-ABZ	PAR30 Eyeball	50W PAR30
	 209N-WH	Gimbal Ring with Flat Trim	35W PAR30, 35W PAR30L
	 688B-WH 688W-WH	Gimbal Ring with Black Baffle Gimbal Ring with White Baffle	35W PAR30, 35W PAR30L
	 689C-WH 689G-WH 689HZ-WH 689WHZ-WH 689WHZ-ABZ	Gimbal Ring in Clear Cone Gimbal Ring in Gold Cone Gimbal Ring in Haze Cone Gimbal Ring in Wheat Haze Cone Gimbal Ring in Wheat Haze Cone	35W PAR30, 35W PAR30L
	 212N-WH ♦ 212N-SC ♦ 212N-ABZ ♦	Frosted Lens with Clear Center	35W PAR30

Trim Size: 6¼" O.D. (except Cat No. 529 - 6½" O.D.)

Trim Finish: ABZ - Classic Aged Bronze, SC - Satin Chrome, WH - White.

Alzak is a registered trademark of Alcoa Corp.

Note: In Canada when insulation is present, Type IC fixtures must be used.

 JUNO IC housings meet IECC Energy Code requirements per ASTM E283.
Air-Loc® rated trims are pre-gasketed for minimum air leakage with IC housings.

♦ UL Listed for use in wet location.

♦♦ UL Listed for use in wet location with outdoor rated lamp.