



Project: \_\_\_\_\_

Fixture Type: \_\_\_\_\_

Location: \_\_\_\_\_

Contact/Phone: \_\_\_\_\_

# TRAC-MASTER®

Recessed Trac System

## TRAC SECTIONS, CONNECTORS & ACCESSORIES

T14 and T18

### PRODUCT DESCRIPTION

Flanged, single-circuit trac sections for recessing into plaster board or suspended grid ceiling. For straight runs only. Accepts all Trac-Master and Trac-Lites trac fixtures.

### PRODUCT SPECIFICATIONS

**Construction** Extruded aluminum flanged channel • One-piece thermoplastic insulator • Injection molded polycarbonate dead-end with set screw • Standard lengths may be cut-to-length by installer.

**Electrical** Two 12 gauge solid copper conductors • Rated 20 amps at 120 volts • Aluminum channel used as system ground • One-piece insulator insures consistent conductor spacing for reliable electrical contact • Insulating bushings supplied at mounting hole locations to prevent shorts to ground.

**Labels** UL listed, CSA certified.



### PRODUCT INSTALLATION

Debossed polarity line provides visual cue to proper trac, trac connector and fixture alignment • Supplied with toggle bolts • Insulator stays same length as extrusion to simplify field-cutting of trac • Connectors and feeds simply push into trac sections.


### PRODUCT CODE

Catalog Number	Finish	Description	Actual Length
<b>T14WH</b>	White	4" Recessed Trac Section	43 <sup>7</sup> / <sub>8</sub> "
<b>T18WH</b>	White	8" Recessed Trac Section	91 <sup>7</sup> / <sub>8</sub> "


### DIMENSIONS

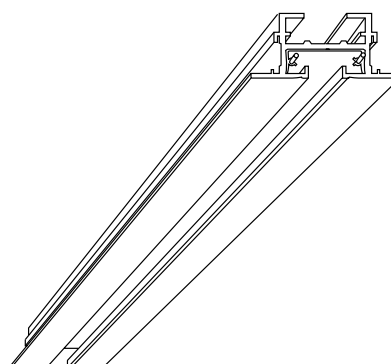

### TRAC CONNECTORS




**T121WH  
End Feed  
Connector.**  
With wiring box for  
electrifying trac.




**T123WH  
Mini Straight Connector**  
Mechanically and electrically joins two  
trac sections end to end.


### ACCESSORIES



**T31WH, T31BL**  
Pendant Adapter. Adapts  
swag or chain-hung fixture to  
trac. Supports up to 25 lbs.  
Not UL Listed.



**T33WH, T33BL**  
Outlet Adapter. Provides  
electrical receptacle.  
Not UL Listed.



**T32WH, T32BL**  
Plant or Utility Hook.  
Supports up to 25 lbs.  
Not UL Listed.

Product specifications subject to change without notice.