



Project: _____

Fixture Type: _____

Location: _____

Contact/Phone: _____

6" DELUXE UNIVERSAL TC REMODEL HOUSING

INCANDESCENT LAMPS

TC2R

PRODUCT DESCRIPTION

TC Remodel Housing for remodel application where back side of ceiling is not accessible • Installs through an opening in the ceiling from below • Secured in place by factory installed remodel springs • Design for use in non-insulated areas • If installed where insulation is present, the insulation must be pulled back 3" from all sides of the TC housing.

PRODUCT SPECIFICATIONS

Lamp Lamp ratings based on trim selected—see reverse.

Socket Medium base porcelain with nickel-plated copper screw shell • Drop socket with spring to accommodate certain trim installation.

Trims Trim selection shown on reverse.

Labels U.L. listed for through-branch wiring, damp locations and IP • Product thermally protected against improper use of lamps or insulation • Union made • UL and cUL listed • Trims 20, 21, 22, 239, 240, 241, 242, 243, 9000 and 9900 are wet location approved for covered ceiling applications • Trims 28, 29 are wet location approved for covered ceiling applications, **when used with outdoor rated lamps.**

Testing All reports are based on published industry procedures; field performance may differ from laboratory performance.

Product specifications subject to change without notice.

INSTALLATION



Junction Box Pre-wired junction box, UL and cUL listed for through-branch wiring, maximum 4 No. 12 AWG 90° C branch circuit conductors (2 in, 2 out) • Junction box provided with removable access plate, (5) ½" knockouts, (4) Non-metallic sheathed cable connectors and ground wire • Knockouts equipped with pryout slots.

Housing TC housing, 22-gauge white painted steel • Double stack adjustable feature enables remodel springs to accommodate up to 1¾" ceiling thickness • Adjusts from 7¼" max. height down to 5¼" min. height.

PRODUCT CODES





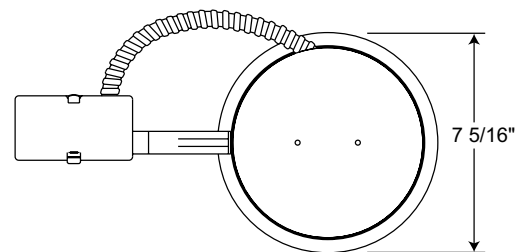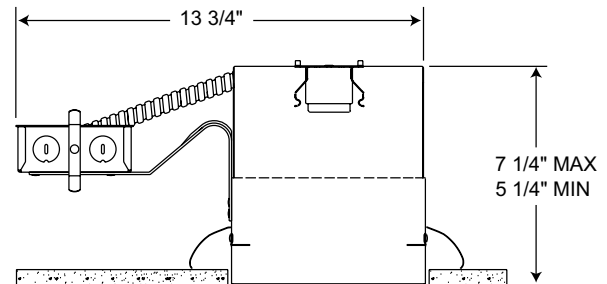

























































Catalog Number	Input Voltage	Lamp Rating (max.)
TC2R	120V	A19/A21/BR30/BR40/MR16/PAR16/PAR20/PAR30/PAR30L/PAR38/R20/R30 (See reverse for max. trim rating)

DIMENSIONS



6 3/4" CEILING CUTOUT

TRIMS/LAMPS

Cat. No.	Description	Max. Lamp Rating	Cat. No.	Description	Max. Lamp Rating
†	 23B-WH	50W PAR20/R20	†	 226B-WH	60W PAR16
	24B-WH Conical Black Baffle	75W PAR30L, 65W BR30	†	 226W-WH	
†	 24B-SC		†	 228-WH	50W PAR20/R20
**	 24B-ABZ		†	 229-WH	75W PAR30L, 65W BR30
	24B-BL Conical Black Baffle		†	 229-SC	
	24W-WH Conical White Baffle		†	 229-ABZ	
	25B-WH Straight Black Baffle	150W PAR38, 120W BR40	†	 229-BL	
**	 25B-SC		†	 248W-WH	50W PAR20/R20
	25B-ABZ Straight Black Baffle		†	 249B-WH	75W PAR30L, 65W BR30
	25B-BL Straight Black Baffle		†	 249W-WH	
	25W-WH Straight White Baffle		†	 264B-WH	75W PAR30
	26C-WH Straight Cone - Clear Alzak®	150W PAR38, 120W BR40	**	 264W-WH	
	26G-WH Straight Cone - Gold Alzak®		†	 267C-WH	75W PAR30
**	 26B-WH		†	 267G-WH	
	26PT-SC Straight Cone - Pewter Alzak®		†	 267B-WH	
	26W-WH Straight Cone - Gloss White		**	 267HZ-WH	
	26HZ-WH Straight Cone - Haze		†	 267WHZ-WH	
	26WHZ-WH Straight Cone - Wheat Haze			 XR30101WH	75W PAR30
	27C-WH Tapered Cone - Clear Alzak®	75W PAR30L, 65W BR30		 XR30101BL	
	27G-WH Tapered Cone - Gold Alzak®			 XR30101GP	
	27B-WH Tapered Cone - Black Alzak®			 XR30101SL	
†	 27PT-SC		†	 20-WH ♦	75W A19
**	 27W-WH		†	 20-PW ♦	
	27HZ-WH Tapered Cone - Haze		†	 240-WH ♦	100W A19
	27WHZ-WH Tapered Cone - Wheat Haze		†	 240-PW ♦	
	27WHZ-ABZ Tapered Cone - Wheat Haze		†	 21-WH ♦	75W A19
	28B-WH ♦♦ Conical Black Baffle	100W A19, 150W A21, 150W PAR38, 75W PAR30, 75W PAR30L, 85W BR30, 120W BR40	†	 21-PW ♦	
	28W-WH ♦♦ Conical White Baffle		†	 241-WH ♦	100W A19
	29C-WH ♦♦ Deep Cone - Clear	100W A19, 150W A21, 100W PAR38, 75W PAR30, 75W PAR30L, 85W BR30, 120W BR40	†	 241-PW ♦	
	29W-WH ♦♦ Deep Cone - White			 242-WH ♦	120W PAR38
	230CB-WH Economy Multiplier - Clear w/Black Baffle	100W A19		 242-SC ♦	
	230CW-WH Economy Multiplier - Clear w/White Baffle			 242-ABZ ♦	
	232C-WH Multiplier - Clear Alzak®	100W A19, 150W A21		 22-WH ♦	75W A19
	232G-WH Multiplier - Gold Alzak®	100W A19, 150W A21		 239-WH ♦	75W A19
	232W-WH Multiplier - Gloss White	100W A19		 261B-WH	75W A19
	232HZ-WH Multiplier - Haze	100W A19, 150W A21		 261W-WH	
	232WHZ-WH Multiplier - Wheat Haze	100W A19, 150W A21		 243-WH ♦	100W A19
	233C-WH Multiplier in Clear Alzak® w/Black Baffle	100W A19, 150W A21	†	 9324-SC	65W BR30
†	 244B-WH	75W PAR30/30L, 65W BR30	†	 9702	75W BR30
**	 244W-WH		†	 9024W-WH	65W BR30
**	 247C-WH	75W PAR30/30L, 65W BR30	†	 9524-SC	65W BR30
**	 247G-WH		†	 9900-WH ♦	75W A19
**	 247B-WH				
	247HZ-WH Shallow Cone - Haze				
	247WHZ-WH Shallow Cone - Wheat Haze				
†	 250-WH	65W BR30			
	250-SC Open Frame				
	250-ABZ Open Frame				
	251-WH Open Frame	120W BR40, 250W R40 Heat Lamp			
**	 254B-WH	75W PAR30, 100W PAR38			
	254W-WH Deep Baffle - White				
**	 257C-WH	75W PAR30, 100W PAR38			
**	 257B-WH				
**	 257G-WH				
**	 257HZ-WH				
**	 257WHZ-WH				
	 224B-WH	150W PAR38/3 Side Prong			
	224W-WH Gimbal in White Baffle				
	Can also be used w/med. screw base lamps				

† Trim may be used with TC2R housing adjusted in lowest (5¼") height position.

♦ UL Listed for use in wet location.

♦♦ UL Listed for use in wet location with outdoor rated lamp.



** NOTE: TR6 Trim Ring compatible with 24, 25, 26, 27, 244, 247, 254, 257, 264, 267, 9900 trims.



1300 S. Wolf Road • Des Plaines, IL 60018 • Phone (847) 827-9880 • Fax (847) 827-2925
 220 Chrysler Drive • Brampton, Ontario • Canada L6S 6B6 • Phone (905) 792-7335 • Fax (905) 792-0064
 Visit us at www.junolightinggroup.com

Trim Size: 7¾" O.D. (except Cat. Nos. 20, 21, 22, 228, 229, 240, 241, 251, 9000, 9024 - 8" O.D., Cat. No. 9702 - 7¾" O.D.).
 Trim Finish: ABZ - Classic Aged Bronze, BL - Black, GP - Graphite, PW - Plastic White (Polycarbonate material shower trim), SC - Satin Chrome, SL - Silver, WH - White.
 * Use dimmers specifically designed for low voltage magnetic transformers.
 Alzak is a registered trademark of Alcoa Corp.
 Note: In Canada when insulation is present, Type IC fixtures must be used.

LOW VOLTAGE TRIMS WITH TRANSFORMER *

 424B-WH	Downlight or Adjustable w/Black Baffle	50W MR16
 427W-WH	White Cylinder w/White Baffle/White Bezel	50W MR16