
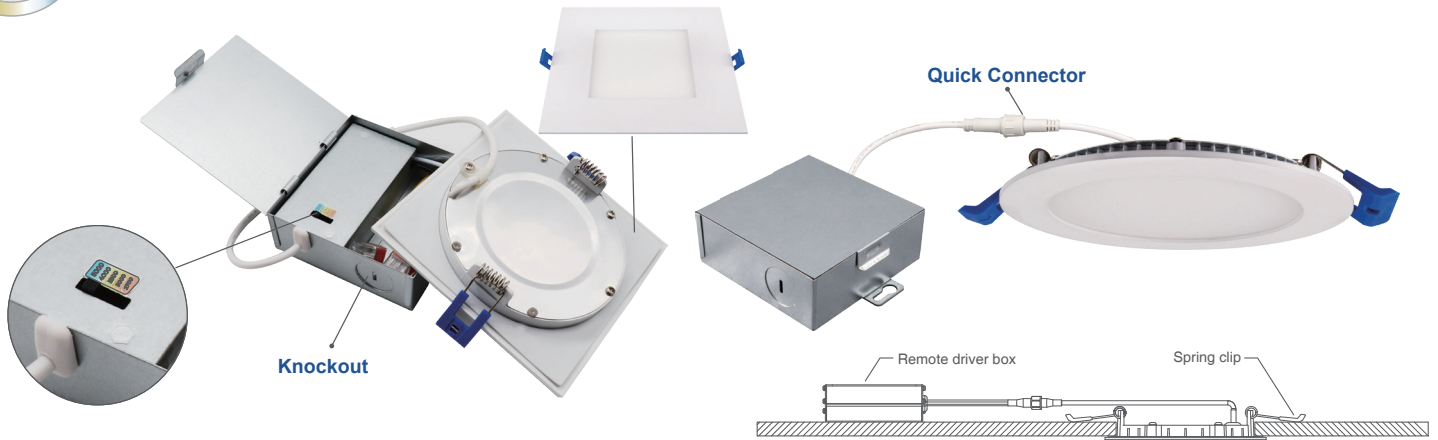


4 Inch


Triac Dimming LED Slim Downlight

- Edge-lit technology, no glare or dark spots, instant-on
- No existing recessed housing or junction box required
- Dimming: TRIAC down to 10%
- I.C. rated for direct contact with insulation
- Suitable for WET LOCATION
- Rated for a long life - over 50,000 hours

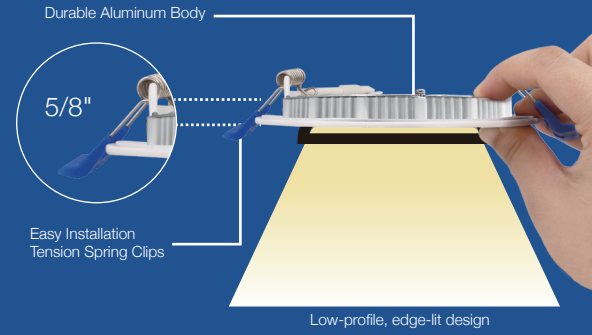


SPECIFICATIONS

Model	L4R-11W-3CCT-D90-MW	LA4R-11W-3CCT-D90-MW	LA4S-11W-3CCT-D90-MW
Shape	Round	Round	Square
Default Driver Input	AC120V, 60Hz	AC120V-277V, 60Hz	AC120V-277V, 60Hz
Size		4in	
Watts		11W	
Light Output(lm)		700lm	
Color Temperature(K)		3CCT Selectable 2700K to 4000K	
CRI		90Ra+	
Dimming		Triac Dimming	
Power Factor		>0.9	
Approved Location		Wet Location	
Air Tight		Yes	
Operating Temp.		(-4°F~104°F) -20~40°C	
Beam Angel		120°	

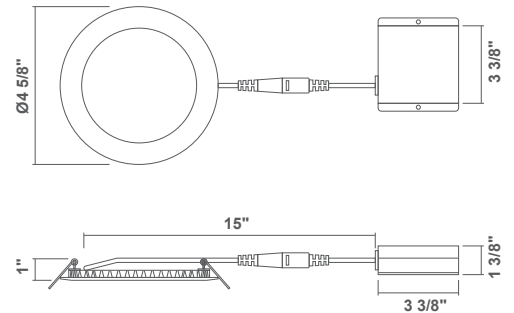

4in Round
Cut Hole Size:Ø4-1/4"

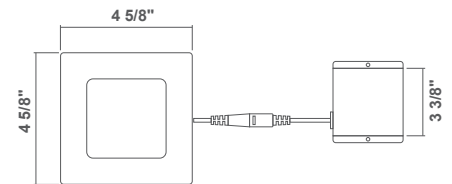

4in Square
Cut Hole Size:Ø4-1/4"

Accessories

<p>Mounting Plate</p> <p>R2.5-4-6-NC See Page 21</p>	<p>Mounting Plate</p> <p>R4-NC See Page 21</p>	<p>Emergency Driver</p> <p>BL-ELD-15W See Page 21</p>
--	--	---