



# Page 1 of 1

# 5" Aperture Lens Free Wet Location Trim

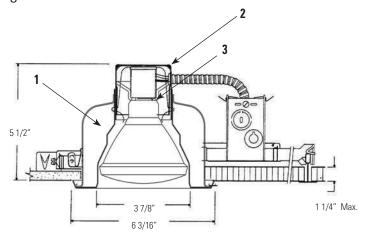

1084/1000 IC Series Incandescent Insulated Ceiling



## 1084/1002P1

Standard Incandescent

Complete Fixture consists of Frame-In Kit & Reflector Trim. Select each separately.

Reflector Trim	Frame-In Kit - See Individual Frame-In Kit Specification Sheets Incandescent			
	Frame-In Kit	Ceiling Type	Lamping	Height
1084WH Gloss White	1002P1	Non IC	75W PAR30L Outdoor Rated* †	5 1/2"
<b>1084CD</b> Clear Diffuse	1003R	Non IC Remodeler	75W PAR30L Outdoor Rated* †	5 1/2"
	1000IC	IC	60W PAR30 Outdoor Rated*	7 5/16"
	1000AICM	AirSeal ® IC	60W PAR30 Outdoor Rated*	7 5/16"
	1004ICX	AirSeal ® IC	60W PAR30 Outdoor Rated*	7 1/4"

<sup>\*</sup> For safe operation, you must use Sylvania outdoor rated lamp. † (Use Socket Extender Accessory with Short Neck)

#### **Features**

- 1. Reflectors: Formed aluminum, .040 minimum thickness; gloss white and
- 2. Frame-In Kit: (1002P1 standard frame shown). Other frames listed above and shown on the right. See Frame-In Kit specification sheets for more details.
- 3. Gasket: Flexible, high temperature sillicone gasket ensure sealing of electrical components.

### **Accessories**

LFG 356 - Replacement Gasket Medium Base Par 30 Socket Extender 1968-For use with Short Neck PAR30 Lamps

U.L. (Suitable for Wet Locations - Covered Ceiling Only)

NEC® is a registered trademark of the National Fire Protection Association.

Job Information	Туре:
Job Name:	
Cat. No.:	
Lamp(s):	
Notes:	

Lightolier a Genlyte company www.lightolier.com 631 Airport Road, Fall River, MA 02720 • (508) 679-8131 • Fax (508) 674-4710 We reserve the right to change details of design, materials and finish. © 2011 Genlyte Group LLC • H0711