

**Ordering Information**

Catalog No.	Finish	Mounting	Lamps
22GR6WH 22GR6BK 22GR6AL	Matte White Matte Black Metallic Aluminum	All Lytespan Track Systems. Does not mount on ProSpec Track.	MR16 Lamp with out Integral lens, 50W Max MR16 Lamp with integral lens 37W Max

**Features**

- Transformer:** Class two electronic transformer for 12v halogen lamps
- Track Attachment Fitting:** Molded polycarbonate; rotates into track
- Brass Contact:** Extends for connection to second circuit  
(Advent Lytespan track only)
- Horizontal Pivot:** Wireless stem profile with infinite horizontal rotation
- Vertical Pivot:** 0-90° vertical adjustment
- Socket:** Bi-pin multipoint contact low voltage halogen socket
- Housing:** Die cast aluminum
- Frosted Glass:** Included; rotate clockwise to attach
- Glass Shield:** Integral; For use with unshielded lamps

**Finish**

All Painted finishes are baked enamel.

**Dimming**

Use only dimmers specifically designed for use with electronic transformers.  
Low voltage fixtures may produce audible sound when dimmed.

**Accessories**

- Accessory Holder:** None  
**Lenses & Louvers:** None  
**Snoot Accessory:** None

Not permissible to use any more than one glass accessory (lens or filter) at any time.

**Labels**

UL, cUL


Job Information	Type:
<b>Job Name:</b>	
<b>Cat. No.:</b>	
<b>Lamp(s):</b>	
<b>Notes:</b>	

**AIMING ANGLE:**

- L** Beam length
- W** Beam Width
- C** Distance to center beam
- D** Distance
- A** Aiming Angle
- FC** Footcandles

L and W are the outer points where the candle power drops to 50% of the maximum. FC are the initial footcandles at the center of the beam.

Lamp data shown is typical. Consult lamp manufacturers for availability and performance. CBCP= Center Beam Candle Power.

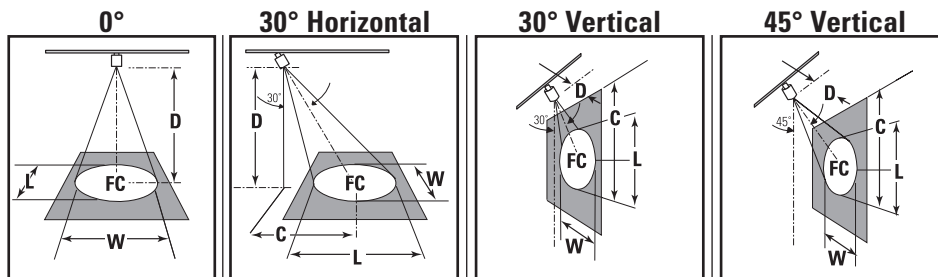

**LAMP**

	Beam Spread (To 50% CBCP)	CBCP	Rated Life (Hrs.)	D	FC	L	W	D	C	FC	L	W	D	C	FC	L	W	D	C	FC	L	W															
20W MR16 VNSP (EXZ)	7°	7400	3000	6'	206	0.7'	0.7'	8'	6.9'	75	1.3'	1.1'	2'	3.5'	231	1.0'	0.5'	4'	4.0'	164	1.0'	0.7'	5'	4.0'	105	1.2'	0.9'	6'	6.0'	73	1.5'	1.0'	7'	7.0'	53	1.7'	1.2'
20W MR16 NSP (ESX)	15°	3750	5000	6'	104	1.6'	1.6'	8'	4.6'	38	2.8'	2.4'	2'	3.5'	117	2.2'	1.1'	4'	4.0'	83	2.1'	1.5'	5'	5.0'	52	3.3'	1.6'	6'	6.0'	37	3.2'	2.2'	7'	7.0'	27	3.8'	2.6'
20W MR16 FL (BAB)	40°	525	5000	2'	131	1.5'	1.5'	2'	1.2'	85	2.0'	1.7'	1'	1.7'	66	4.8'	1.5'	3'	3.0'	21	5.0'	3.1'	4'	4.0'	12	6.7'	4.1'	5'	5.0'	7	8.4'	5.1'					
35W MR16 SP (FRA)	20°	3900	4000	6'	108	2.1'	2.1'	5'	2.9'	101	2.4'	2.0'	2'	3.5'	122	3.1'	1.4'	3'	5.2'	54	4.7'	2.1'	5'	5.0'	55	3.6'	2.5'	7'	7.0'	28	5.1'	3.5'	9'	9.0'	17	6.6'	4.5'
35W MR16 FL (FMW)	40°	1000	5000	5'	40	3.6'	3.6'	5'	2.9'	26	5.1'	4.2'	2'	3.5'	31	9.7'	2.9'	3'	5.2'	14	14.5'	4.4'	4'	6.9'	8	19.3'	5.8'	5'	8.7'	5	24.2'	7.3'					
37W MR16 (IR) NFL	25°	4400	4000	6'	122	2.7'	2.7'	6'	3.5'	79	3.6'	3.1'	2'	3.5'	138	4.2'	1.8'	3'	5.2'	61	6.2'	2.7'	4'	6.9'	34	8.3'	3.5'	5'	8.7'	22	10.4'	4.4'					
37W MR16 (IR) FL	40°	2200	4000	5'	88	3.6'	3.6'	5'	2.9'	57	5.1'	4.2'	2'	3.5'	69	9.7'	2.9'	3'	5.2'	31	14.5'	4.4'	4'	6.9'	17	19.3'	5.8'	5'	8.7'	11	24.2'	7.3'					
42W MR16 VNSP (EZY)	9°	12300	3500	10'	123	1.6'	1.6'	10'	5.8'	80	2.1'	1.8'	2'	3.5'	384	1.3'	0.6'	3'	5.2'	171	1.9'	0.9'	4'	6.9'	96	2.6'	1.3'	5'	8.7'	62	3.2'	1.6'					
50W MR16 NSP (EXT)	10°	8800	3000	8'	138	1.4'	1.4'	8'	4.6'	89	1.9'	1.6'	2'	3.5'	275	1.4'	0.7'	3'	5.2'	122	2.1'	1.0'	4'	6.9'	69	2.9'	1.4'	5'	8.7'	44	3.6'	1.7'					
50W MR16 NFL (EXZ)	24°	2500	3000	6'	69	2.6'	2.6'	6'	3.5'	45	3.5'	2.9'	2'	3.5'	78	3.9'	1.7'	3'	5.2'	35	5.9'	2.6'	4'	6.9'	20	7.9'	3.4'	5'	8.7'	13	9.8'	4.3'					
50W MR16 FL (EXN)	36°	1600	3000	6'	44	3.9'	3.9'	6'	3.5'	29	5.4'	4.5'	2'	3.5'	50	7.6'	2.6'	3'	5.2'	22	11.4'	3.9'	4'	6.9'	13	15.2'	5.2'	5'	8.7'	8	19.0'	6.5'					
50W MR16 WFL (FNV)	60°	1200	4000	3'	128	3.1'	3.1'	3'	1.7'	83	4.6'	3.6'	1'	1.7'	144	22.3'	2.1'	2'	3.5'	36	44.5'	4.2'	3'	4.0'	16	66.8'	6.2'	4'	6.9'	9	89.1'	8.3'					

**MR16 LOW VOLTAGE HALOGEN BI-PIN LAMPS WITH ALUMINIZED (NON-DICHROIC) REFLECTORS**

50W MR16 NSP	10°	10500	4000	8'	164	1.5'	1.5'	7'	4.0'	139	1.8'	1.6'	3'	5.2'	146	2.4'	1.2'	5'	5.0'	148	1.9'	1.4'	7'	7.0'	76	2.7'	1.9'	9'	9.0'	46	3.5'	2.5'	11'	11.0'	31	4.3'	3.0'
50W MR16 NFL	25°	3000	4000	6'	83	2.7'	2.7'	5'	2.9'	78	3.0'	2.6'	2'	3.5'	94	4.2'	1.8'	3'	5.2'	42	6.2'	2.7'	4'	6.9'	23	8.3'	3.5'	5'	8.7'	15	10.4'	4.4'					
50W MR16 FL	35°	1900	4000	4'	119	2.9'	2.9'	3'	1.7'	137	3.0'	2.5'	1'	1.7'	238	4.8'	1.5'	3'	4.0'	26	14.5'	4.4'	4'	4.0'	42	6.7'	4.1'	5'	5.0'	27	8.4'	5.1'	6'	6.0'	19	10.1'	6.2'

**Job Information** **Type:**