

### Ordering Information

Catalog No.	Finish	Mounting	Lamps
22SS2WH	Matte White	All Lytespan Track Systems.	PAR20 50W Max.
22SS2BK	Matte Black	Does not mount on ProSpec Track.	
22SS2AL	Metallic Aluminum		

### Features

- Track Attachment Fitting:** Locking lever for mechanical/electrical connection
- Brass Contact:** Extends for connection to second circuit (Advent Lytespan track only)
- Horizontal Pivot:** Wireless stem profile with 365° horizontal rotation
- Vertical Pivot:** 0-90° vertical adjustment
- Socket:** Porcelain socket, medium base, nickel-plated screw shell
- Housing:** Die cast aluminum
- Accessory Cartridge:** Hinged and captive; retaining ring included.

### Finish

All Painted finishes are baked enamel.

### Dimming

Fixture may be used on a track with a dimmer. Consult dimmer manufacturer for correct dimmer selection.

### Accessories

- Accessory Holder:** Integral
- Accessories:** Accepts two total (1 lens + 1 louver or 2 lenses)
- Lens:** AF25, ADF25. Not compatible with AF25IR
- Louver:** AL25HC

### Labels

UL, cUL

Job Information	Type:
Job Name:	
Cat. No.:	
Lamp(s):	
Notes:	






**AIMING ANGLE:**

- L** Beam length
- W** Beam Width
- C** Distance to center beam
- D** Distance
- A** Aiming Angle
- FC** Footcandles

L and W are the outer points where the candle power drops to 50% of the maximum. FC are the initial footcandles at the center of the beam.

Lamp data shown is typical. Consult lamp manufacturers for availability and performance. CBCP= Center Beam Candle Power.

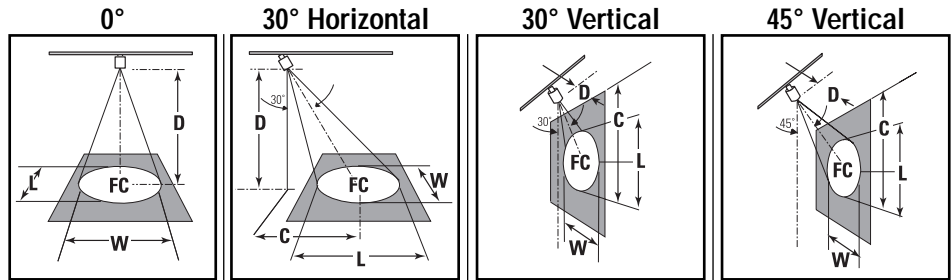

**LAMP**

	Beam Spread (To 50% CBCP)	CBCP	Rated Life (hrs.)	D	FC	L	W	D	C	FC	L	W	D	C	FC	L	W	D	C	FC	L	W
50W PAR20 SP	10°	4,600	2,500	6' 8' 10'	128 72 46	1.0' 1.4' 1.7'	1.0' 1.4' 1.7'	8' 12' 14'	4.6' 6.9' 8.1'	47 21 15	1.9' 2.8' 3.3'	2.4' 2.8' 3.2'	2' 3' 4'	3.5' 5.2' 6.9'	144 64 36	1.4' 2.1' 2.9'	0.7' 1.0' 1.4'	4' 5' 6'	4.0' 5.0' 6.0'	102 65 45	1.4' 1.8' 2.1'	1.0' 1.2' 1.5'
50W PAR20 NFL	25°	1,500	2,500	4' 6' 8' 10'	116 51 29	1.9' 2.9' 3.8'	1.9' 2.9' 3.8'	3' 5' 7' 9'	1.7' 2.9' 4.0'	134 48 25	2.0' 3.3' 4.6'	1.7' 2.8' 3.9'	1' 2' 3'	1.7' 3.5' 5.2'	231 58 26	2.3' 4.6' 7.0'	1.0' 1.9' 2.9'	3' 4' 5' 6'	3.0' 4.0' 5.0'	73 41 26	3.1' 4.1' 5.1'	2.0' 2.7' 3.4'
50W PAR30 FL	35°	1,400	3,000	6' 7' 8' 9'	39 29 22	3.8' 4.4' 5.0'	3.8' 4.4' 5.0'	6' 7' 8' 9'	3.5' 4.0' 4.6'	25 19 14	5.2' 6.1' 7.0'	4.4' 5.1' 5.8'	2' 3' 4'	3.5' 5.2' 6.9'	44 19 11	7.2' 10.8' 14.4'	2.5' 3.8' 5.0'	2' 3' 4'	2.0' 3.0' 4.0'	124 55 31	2.8' 4.2' 5.6'	1.8' 2.7' 3.6'
60W PAR16 NSP	10°	5,000	2,000	6' 8' 10'	139 78 50	1.0' 1.4' 1.7'	1.0' 1.4' 1.7'	6' 7' 8' 10'	2.9' 4.0' 5.2'	130 66 40	1.2' 1.6' 2.1'	1.0' 1.4' 1.8'	2' 3' 4'	3.5' 5.2' 6.9'	156 69 39	1.4' 2.1' 2.9'	0.7' 1.0' 1.4'	3' 5' 7'	3.0' 5.0' 7.0'	196 71 26	1.6' 1.6' 2.5'	1.2' 1.7' 2.2'
60W PAR16 NFL	30°	1,300	2,000	3' 5' 7' 9'	144 52 27	1.6' 2.7' 3.8'	1.6' 2.7' 3.8'	3' 5' 7' 9'	1.7' 2.9' 4.0'	94 34 17	2.2' 3.7' 5.1'	1.9' 3.1' 4.3'	1' 2' 3'	1.7' 3.5' 5.2'	163 41 18	2.7' 5.5' 8.2'	1.1' 2.1' 3.2'	2' 3' 4'	2.0' 3.0' 4.0'	115 51 29	2.3' 3.5' 4.6'	1.5' 2.3' 3.0'
75W PAR30 NSP	10°	13,000	3,000	8' 12' 16' 20'	219 97 55	1.3' 1.9' 2.5'	1.3' 1.9' 2.5'	8' 12' 16' 20'	4.0' 5.8' 7.5'	186 91 54	1.5' 2.1' 2.7'	1.3' 1.8' 2.4'	3' 4' 5'	5.2' 6.9' 8.7'	194 109 70	1.9' 2.6' 3.2'	0.9' 1.3' 1.6'	5' 7' 9'	5.0' 6.1' 7.2'	196 101 61	1.6' 2.2' 2.9'	1.1' 1.6' 2.0'
75W PAR30 NFL	25°	3,800	3,000	6' 8' 10' 12'	106 59 38	2.7' 3.5' 4.4'	2.7' 3.5' 4.4'	6' 8' 10' 12'	3.5' 4.6' 5.8'	69 39 25	3.6' 4.8' 6.0'	3.1' 4.1' 5.1'	2' 3' 4'	3.5' 5.2' 6.9'	119 53 30	4.2' 6.2' 8.3'	1.8' 2.7' 3.5'	4' 6' 7'	4.0' 5.4' 6.5'	84 37 27	3.7' 5.6' 6.5'	2.5' 3.1' 3.8'
90W PAR38 NSP	9°	19,500	2,500	10' 15' 20' 25'	195 87 49	1.6' 2.4' 3.4'	1.6' 2.4' 3.4'	10' 15' 20' 25'	4.6' 6.9' 9.2'	198 88 49	1.7' 2.5' 3.4'	1.5' 2.2' 2.9'	3' 4' 5'	6.9' 9.2' 11.5'	152 60 38	2.6' 3.8' 5.1'	1.3' 1.9' 2.5'	6' 8' 10'	6.0' 8.5' 12.0'	192 85 48	1.9' 2.9' 3.8'	1.3' 2.0' 2.7'
90W PAR38 SP	12°	14,500	2,500	8' 12' 16'	227 101 57	1.7' 2.5' 3.4'	1.7' 2.5' 3.4'	8' 12' 16'	4.0' 5.8' 7.5'	192 94 56	2.0' 3.5' 5.2'	1.7' 2.4' 3.2'	3' 4' 5'	5.2' 7.5' 9.2'	201 113 73	2.6' 3.5' 5.2'	1.3' 1.7' 2.1'	3' 4' 5'	5.0' 6.3' 7.8'	205 105 63	2.1' 3.0' 4.8'	1.5' 2.1' 2.7'
90W PAR38 NFL	28°	4,500	2,500	6' 8' 10' 12'	125 70 45	3.0' 4.0' 5.0'	3.0' 4.0' 5.0'	6' 8' 10' 12'	2.9' 4.0' 5.2'	117 60 36	3.4' 4.8' 6.1'	2.9' 4.0' 5.2'	2' 3' 4'	3.5' 5.2' 6.7'	141 63 23	4.9' 7.4' 12.3'	2.0' 3.0' 5.0'	3' 4' 5'	3.0' 4.4' 6.0'	177 64 20	3.2' 5.3' 7.4'	2.1' 3.5' 4.9'
90W PAR38 WFL	55°	2,250	2,500	6' 7' 8' 9'	63 46 35	6.2' 7.3' 8.3'	6.2' 7.3' 8.3'	6' 7' 8' 9'	3.5' 4.6' 5.2'	41 30 18	9.2' 10.7' 13.7'	7.2' 8.4' 9.6'	2' 3' 4'	3.5' 5.2' 6.9'	70 31 18	44.5' 66.8' 111.3'	4.2' 6.2' 8.3'	2' 3' 4'	2.0' 3.0' 4.0'	199 88 32	5.7' 8.6' 14.3'	2.9' 4.4' 5.9'
120W PAR38 NSP	10°	25,000	3,000	10' 15' 20' 25'	250 111 63	1.7' 2.6' 3.5'	1.7' 2.6' 3.5'	10' 15' 20' 25'	4.6' 6.9' 9.2'	254 113 63	1.9' 2.8' 3.7'	1.6' 2.4' 3.2'	3' 4' 5'	6.9' 9.2' 11.5'	195 87 49	2.9' 4.3' 5.7'	1.4' 2.1' 2.8'	4' 6' 8'	6.0' 8.5' 12.0'	246 109 61	3.1' 4.2' 5.3'	1.5' 2.2' 3.0'
120W PAR38 FL	30°	4,600	3,000	6' 8' 10' 12'	139 78 50	3.2' 4.3' 5.4'	3.2' 4.3' 5.4'	6' 8' 10' 12'	2.9' 4.0' 5.2'	130 66 40	3.7' 5.1' 6.6'	3.1' 4.3' 5.6'	2' 3' 4'	3.5' 5.2' 6.9'	156 69 39	5.5' 10.9' 13.7'	2.1' 3.2' 4.3'	3' 5' 6'	3.0' 5.0' 7.0'	196 71 22	3.5' 5.8' 10.4'	2.3' 3.8' 6.8'
120W PAR38 WFL	55°	2,000	3,000	4' 6' 8' 10'	125 56 31	3.7' 5.6' 7.5'	3.7' 5.6' 7.5'	4' 6' 8' 10'	1.7' 2.9' 4.0'	144 52 27	4.0' 6.7' 9.4'	3.2' 5.4' 7.5'	1' 2' 3'	1.7' 3.5' 5.2'	250 63 28	10.7' 21.5' 32.2'	1.9' 3.7' 5.6'	1' 2' 3'	1.0' 1.9' 2.8'	79 44 28	7.2' 9.5' 11.9'	4.0' 5.3' 6.6'
250W PAR38 SP	10°	46,500	4,500	12' 16' 20'	323 182 116	2.1' 2.8' 3.5'	2.1' 2.8' 3.5'	12' 16' 20'	2.9' 4.0' 5.2'	210 118 76	2.8' 3.7' 4.7'	2.4' 3.2' 4.0'	3' 4' 5'	6.9' 9.2' 11.5'	161 91 58	4.3' 5.7' 7.2'	2.1' 2.8' 3.5'	6' 8' 10'	6.0' 8.5' 12.0'	457 257 164	2.1' 2.8' 3.5'	1.5' 2.0' 2.5'
250W PAR38 FL	30°	9,000	4,500	8' 10' 12'	141 90 63	4.3' 5.4' 6.4'	4.3' 5.4' 6.4'	8' 10' 12'	4.6' 6.9' 9.2'	91 58 41	5.9' 7.3' 8.8'	5.0' 6.2' 7.4'	3' 4' 5'	5.2' 7.5' 9.8'	125 70 45	8.2' 13.7' 16.4'	3.2' 4.3' 5.4'	4' 6' 8'	5.0' 7.0' 9.0'	199 127 88	4.6' 6.8' 9.8'	3.0' 3.8' 4.5'

Job Information  Type:

Lightolier a Genlyte company  
 631 Airport Road, Fall River, MA 02720 • (508) 679-8131 • Fax (508) 674-4710  
 We reserve the right to change details of design, materials and finish.  
 © 2005 Genlyte Group LLC • B0205

**LIGHTOLIER®**

www.lightolier.com