


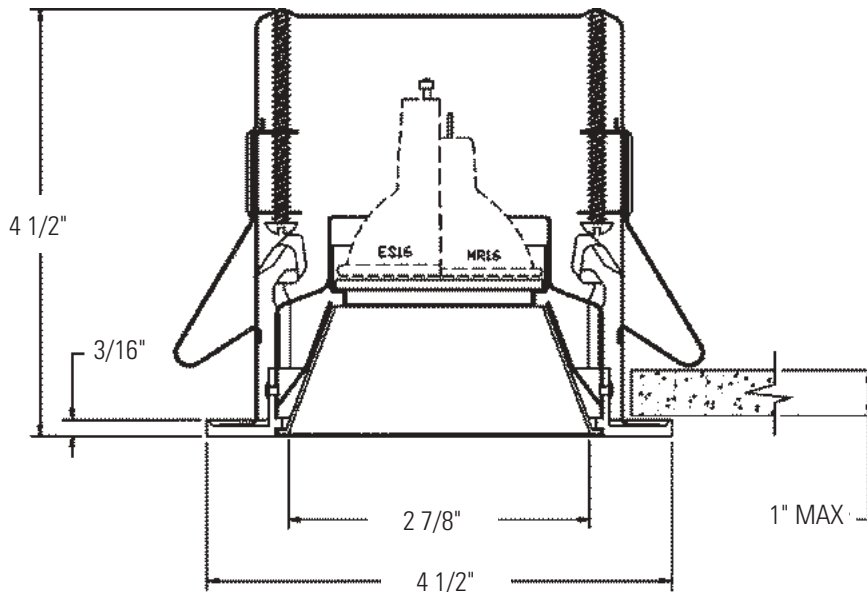

Complete fixture consists of Reflector Trim & Frame-In Kit. Select each separately

Reflector Trim	Frame-In Kit	Lamp
374CHX Chrome and White Flange	Remodeler 300MRSPX	50W MR16
	Remodeler 3401MREX	50W MR16
	Remodeler 300ESX	50W ES/ESD16 (GZ10)
	Non-IC 302MRSPX	50W MR16
	Non-IC 302MREX	50W MR16
	Non-IC 302ESX	50W ES/ESD16 (GZ10)
	IC 302MRIC9SPX	50W MR16
	IC 302ESICX	50W ES/ESD16 (GZ10)
	Air Seal / IC 302MRAICSPX	50W MR16
	Air Seal / IC 302MRAICEX	50W MR16
	Air Seal / IC 302ESAICX	50W ES/ESD16 (GZ10)

Features

- Housing:** 25ga galvanized steel.
- Residence Mounting Clip:** Factory-installed; zinc plated spring steel; free-hand installation.
- Flange:** Die-cast aluminum .060" (1.5mm) thick; white finish.
- Aperture Cone:** 18ga. aluminum.
- Adjustable Lampholder Support:** 27ga. steel; Rotates 358° horizontally and 0° to 25° vertically.
- Mounting Clips (3):** 24ga. spring steel, zinc plated. Provide easy snap-in /snap-out action.
- Lamp Guard:** 1 3/4" (45mm) dia. borosilicate glass.

Frame-In Kit

Note: For complete Frame-In Kit specifications, see 300 frame specification sheets.

Labels

CSA, UL Suitable for damp locations.

Job Information

Type:


Job Name:

Cat. No.:

Lamp(s):

Notes:

Lamp data shown is typical, and is based on bare lamp photometrics. Contact lamp manufacturers for availability and performance.

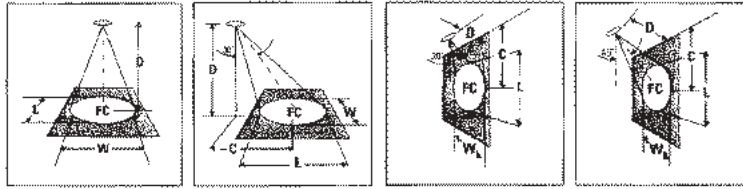

Lamps	Beam Spread (to 50% CDR)	CDR	Beam Life (hrs)	0° AIMING ANGLE					30° AIMING ANGLE					30° AIMING ANGLE					45° AIMING ANGLE				
				D	C	F	L	W	D	C	F	L	W	D	C	F	L	W	D	C	F	L	W
MR-16 LOW VOLTAGE HALOGEN BI-PIN LAMPS																							
 20W MR-16 NESP (ESZ)	7°	6200	3600	7°	161	0.9°	0.9°		8°	3.5°	148	1.3°	0.8°	2°	3.5°	256	1.0°	0.5°	4°	4.0°	181	1.0°	0.7°
				10°	82	1.2°	1.2°		9°	5.7°	66	1.5°	1.3°	3°	5.7°	114	1.5°	0.7°	6°	6.0°	81	1.5°	1.0°
				13°	46	1.6°	1.6°		12°	8.9°	37	2.0°	1.7°	4°	8.0°	54	2.0°	1.0°	8°	8.0°	45	2.0°	1.4°
				16°	32	2.0°	2.0°		15°	8.7°	24	2.5°	2.1°	5°	8.7°	41	2.5°	1.2°	10°	10.0°	29	2.5°	1.7°
 20W MR-16 NESP (ESX)	15°	3800	3600	8°	160	1.4°	1.4°		8°	2.9°	94	1.5°	1.3°	2°	3.5°	112	1.8°	0.9°	3°	3.0°	141	1.4°	1.0°
				9°	58	1.8°	1.8°		7°	4.0°	48	2.1°	1.8°	3°	5.7°	50	2.0°	1.4°	4°	5.0°	51	2.5°	1.7°
				10°	26	2.3°	2.3°		6°	5.7°	25	2.7°	2.4°	4°	6.8°	26	2.5°	1.7°	5°	7.0°	26	3.0°	2.3°
				12°	26	2.7°	2.7°		11°	6.4°	19	3.4°	2.9°	5°	8.7°	18	4.7°	2.3°	5°	9.0°	16	4.2°	2.9°
 20W MR-16 FL (BAG)	40°	525	4600	2°	131	1.5°	1.5°		2°	1.2°	88	2.0°	1.7°	1°	1.7°	66	4.6°	1.5°	2°	2.0°	46	3.4°	2.1°
				3°	58	2.2°	2.2°		3°	1.7°	38	3.0°	2.5°	2°	3.5°	18	9.7°	2.9°	3°	3.0°	21	5.0°	3.1°
				4°	33	2.9°	2.9°		4°	2.3°	21	4.1°	3.4°	3°	5.2°	7	14.5°	4.4°	4°	4.0°	12	9.7°	4.1°
				5°	21	3.6°	3.6°		5°	2.9°	14	5.1°	4.2°	4°	6.9°	4	19.3°	5.8°	5°	5.0°	7	8.4°	5.1°
 20W MR-16 NSP (FSB)	12°	5700	4000	7°	178	1.5°	1.5°		8°	3.9°	157	1.7°	1.5°	2°	3.5°	272	1.7°	0.8°	4°	4.0°	192	1.7°	1.2°
				10°	87	2.1°	2.1°		9°	5.8°	76	2.5°	2.2°	3°	5.2°	127	2.0°	1.3°	6°	6.0°	89	2.6°	1.6°
				13°	51	2.7°	2.7°		12°	8.6°	38	3.4°	2.9°	4°	8.5°	68	3.5°	1.7°	8°	8.0°	54	3.3°	2.1°
				16°	34	3.4°	3.4°		15°	8.7°	25	4.2°	3.8°	5°	9.0°	44	4.9°	2.1°	10°	10.0°	34	4.3°	3.0°
 20W MR-16 SP (FSA)	20°	3900	4000	6°	168	2.1°	2.1°		5°	2.9°	101	2.4°	2.0°	2°	3.5°	122	3.1°	1.4°	3°	3.0°	153	2.7°	1.5°
				8°	81	3.1°	3.1°		7°	4.0°	62	3.3°	2.8°	3°	5.7°	54	4.7°	2.1°	5°	5.0°	55	5.8°	3.5°
				10°	39	3.5°	3.5°		8°	6.2°	31	4.3°	3.7°	4°	6.9°	30	6.2°	2.8°	7°	7.0°	28	9.1°	2.5°
				12°	27	4.2°	4.2°		11°	6.4°	21	5.2°	4.5°	5°	8.7°	20	7.8°	3.5°	9°	9.0°	17	6.6°	4.8°
 30W MR-16 FL (3MW)	40°	7800	4000	4°	100	2.9°	2.9°		3°	1.7°	115	3.0°	2.5°	1°	1.7°	200	4.8°	1.5°	3°	3.0°	95	3.0°	3.1°
				6°	44	4.4°	4.4°		5°	2.8°	42	5.1°	4.2°	2°	3.5°	50	9.7°	2.9°	4°	4.0°	25	9.7°	4.1°
				8°	26	5.8°	5.8°		7°	4.0°	21	7.1°	5.8°	4°	6.9°	12	14.5°	4.4°	5°	5.0°	15	8.4°	5.1°
				10°	16	7.3°	7.3°		9°	5.2°	13	9.1°	7.6°	4°	8.9°	13	19.3°	5.8°	6°	6.0°	16	10.1°	6.1°
 37W MR-16 IR (NSP)	10°	11500	4000	6°	180	1.4°	1.4°		7°	4.0°	152	1.6°	1.4°	3°	5.2°	180	2.1°	1.0°	5°	5.0°	165	1.8°	1.2°
				12°	80	2.1°	2.1°		13°	8.6°	75	2.3°	2.0°	4°	8.5°	90	2.3°	1.4°	6°	6.0°	83	2.5°	1.7°
				16°	45	2.8°	2.8°		18°	7.5°	44	3.3°	2.9°	5°	8.7°	56	3.6°	2.1°	11°	11.0°	50	3.9°	2.2°
				20°	29	3.6°	3.6°		20°	5.2°	29	3.7°	3.2°	6°	10.4°	40	4.3°	2.1°	11°	11.0°	34	3.5°	2.2°
 37W MR-16 NF (NPL)	25°	3500	4000	8°	57	2.7°	2.7°		5°	2.8°	91	3.0°	2.6°	2°	3.5°	108	4.2°	1.8°	3°	3.0°	137	2.8	3.5°
				8°	55	3.5°	3.5°		7°	4.0°	46	4.2°	3.8°	3°	5.2°	49	6.2°	2.7°	5°	5.0°	49	4.7°	3.1°
				10°	35	4.4°	4.4°		9°	5.2°	28	5.6°	4.6°	4°	6.9°	27	8.3°	3.5°	7°	7.0°	25	6.5°	4.4°
				12°	24	5.3°	5.3°		11°	6.4°	19	6.6°	5.6°	5°	8.7°	18°	10.4°	4.4°	5°	5.0°	15	8.4°	5.6°
 37W MR-16 IR (FL)	40°	2050	4000	4°	128	2.8°	2.8°		3°	1.7	148	3.0°	2.5°	1°	1.7°	258	4.8°	1.5°	3°	3.0°	91	5.0°	3.1°
				6°	57	4.4°	4.4°		5°	2.9	93	5.1°	4.2°	2°	3.6	64	9.7°	2.9°	4°	4.0°	46	9.7°	4.1°
				8°	32	5.8°	5.8°		7°	4.0°	27	7.1°	5.8°	3°	6.8	28	14.5°	4.4°	5°	5.0°	25	8.4°	5.1°
				10°	21	7.3°	7.3°		9°	5.2°	18	9.1°	7.6°	4°	8.9°	18	19.3°	5.8°	6°	6.0°	16	10.1°	6.1°
 42W MR-16 NESP (ESZ)	9°	13,100	3500	8°	205	1.3°	1.3°		7°	4.0°	174	1.5°	1.3°	2°	5.2°	180	1.9°	0.9°	3°	3.0°	185	1.6°	1.1°
				12°	91	1.9°	1.9°		10°	5.8°	95	2.3°	1.8°	4°	6.8°	102	2.0°	1.3°	7°	7.0°	96	2.7°	1.6°
				16°	51	2.6°	2.6°		13°	7.5°	50	2.7°	2.4°	5°	8.7°	66	2.2°	1.6°	9°	9.0°	59	2.8°	2.0°
				20°	33	3.1°	3.1°		18°	9.2°	33	3.4°	2.9°	6°	10.4°	46	3.8°	1.9°	11°	11.0°	36	3.5°	2.5°
 42W MR-16 NF (EYS)	22°	2400	4000	4°	150	1.8°	1.8°		3°	1.7°	173	2.0°	1.7°	1°	1.7°	200	2.3°	1.0°	3°	3.0°	94	3.1°	2.0°
				6°	67	2.5°	2.5°		5°	2.8	92	3.3°	2.8°	2°	3.5°	73	4.6°	1.5°	4°	4.0°	53	4.1°	3.1°
				8°	38	3.8°	3.8°		7°	4.0°	52	4.6°	3.9°	3°	5.2°	33	7.8°	2.5°	5°	5.0°	34	5.1°	3.4°
				10°	24	4.8°	4.8°		9°	5.2°	35	5.9°	5.0°	4°	6.9°	18	9.3°	3.6°	6°	6.0°	24	6.1°	4.1°
 50W MR-16 NESP (EXT)	16°	10,200	4000	6°	159	2.0°	2.0°		7°	4.0°	135	2.3°	2.0°	2°	5.2°	142	3.1°	1.5°	3°	3.0°	144	2.5°	1.7°
				8°	71	2.8°	2.8°		9°	5.8°	66	3.3°	2.8°	4°	6.8°	80	4.1°	2.0°	7°	7.0°	74	3.5°	2.4°
				10°	40	3.6°	3.6°		10°	7.5°	40	3.7°	3.3°	5°	8.7°	51	5.1°	2.5°	9°	9.0°	45	4.3°	3.1°
				20°	26	4.8°	4.8°		15°	9.2°	28	5.3°	4.5°	6°	10.4°	35	6.2°	2.9°	11°	11.0°	30	5.5°	3.8°
 50W MR-16 NFL (EKZ)	27°	3400	4100	8°	91	2.8°	2.8°		5°	2.8	88	3.3°	2.8°	2°	3.5°	106	4.6°	1.9°	3°	3.0°	134	3.1°	2.0°
				8°	93	3.8°	3.8°		7°	4.0°	48	4.6°	3.9°	3°	5.2°	47	7.0°	2.9°	5°	5.0°	48	5.1°	3.4°
				10°	34	4.8°	4.8°		8°	5.2°	27	5.3°	5.0°	4°	6.9°	27	9.3°	3.6°	7°	7.0°	25	7.1°	4.7°
				12°	24	5.8°	5.8°		11°	6.4°	18	7.2°	6.1°	6°	8.7°	17	11.6°	4.8°	9°	9.0°	15	9.2°	6.1°
 50W MR-16 FL (EXT)	40°	1850	4000	4°	116	2.8°	2.8°		3°	1.7°	134	3.0°	2.5°	1°	1.7°	231	4.8°	1.5°	3°	3.0°	71	5.0°	3.1°
				6°	51	4.4°	4.4°		5°	2.9	82	5.1°	4.2°	2°	3.6°	58	9.7°	2.9°	4°	4.0°	41	6.7°	4.1°
				8°	26	5.8°	5.8°		7°	4.0°	25	7.1°	5.8°	3°	6.7°	26	14.5°	4.4°	5°	5.0°	26	8.4°	5.1°
				10°	19	7.3°	7.3°		9°	5.2°	15	8.1°	7.0°	4°	8.9°	14	19.3°	5.8°	6°	6.0°	16	10.1°	6.1°
 50W MR-16 VFL (ENV)	55°	1150	4000	3°	128	3.1°	3.1°		3°	1.7°	83	4.6°	3.6°	1°	1.7°	144	7.3°	2.1°	2°	2.0°	102	9.7°	2.9°
				4°	57	4.4°	4.4°		4°	2.9	30	7.6°	6.0°	2°	3.5°	38	14.5°	4.2°	3°	3.0°	45	8.6°	4.4°
				7°	23	7.3°	7.3°		7°	4.0°	15	10.7°	8.4°	3°	5.2°	18	16.6°	6.2°	4°	4.0°	23	11.4°	5.8°
				9°	14	9.4°	9.4°		9°	5.2°	9	12.7°	10.8°	4°	6.9°	9	18.1°	8.2°	5°	5.0°	16	14.3°	7.4°
 73W MR-16 SP	10°	14000	6000	8°	210	1.4°	1.4°		7°	4.0°	186	1.8°	1.4°	3°	5.2°	194	2.1°	1.0°	5°	5.0°	198	1.8°	1.2°
				12°	97	2.1°	2.1°		10°	5.8°	91	2.3°	2.0°	4°	8.8°	106	2.8°	1.4°	7°	7.0°	101	2.5°	1.7°
				16°	55	2.8°	2.8°		13°	7.5°	54	3.0°	2.6°	5°	8.7°	70	3.6°	1.7°	9°	9.0°	61	3.2°	2.3°
				20°	30	3.6°	3.6°		16°	9.2°	36	3.7°	3.2°	6°	10.4°	49	4.3°	2.1°	11°	11.0°	41	3.8°	2.7°
 73W MR-16 FL	58°	2500	4000	4°																			

Job Information	Type:
------------------------	--------------