


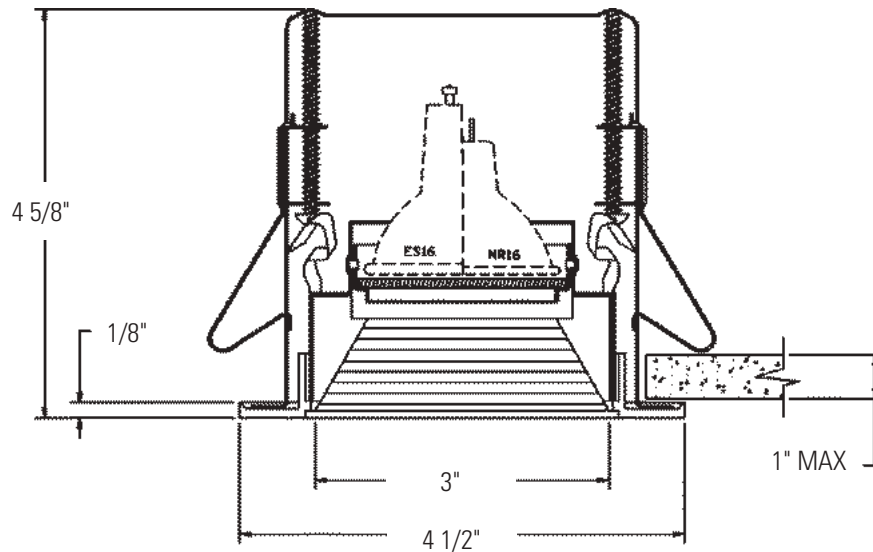

Complete fixture consists of Reflector Trim & Frame-In Kit. Select each separately

Reflector Trim		Frame-In Kit	Lamp
375BKX	Black Phenolic Step Baffle and White Flange	Remodeler 300MRSPX	50W MR16
375WHX	White Phenolic Step Baffle and White Flange	Remodeler 3401MREX	50W MR16
		Remodeler 300ESX	50W ES/ESD16 (GZ10)
		Non-IC 302MRSPX	50W MR16
		Non-IC 302MREX	50W MR16
		Non-IC 302ESX	50W ES/ESD16 (GZ10)
		IC 302MRIC9SPX	50W MR16
		IC 302ESICX	50W ES/ESD16 (GZ10)
		Air Seal / IC 302MRAICSPX	50W MR16
		Air Seal / IC 302MRAICEX	50W MR16
		Air Seal / IC 302ESAICX	50W ES/ESD16 (GZ10)

Features

- Housing:** 25ga. galvanized steel.
- Residence Mounting Clip:** Factory-installed; zinc plated spring steel; free-hand installation.
- Flange:** Die-cast aluminum .060" (1.5mm) thick ; white finish.
- Baffle:** Molded Phenolic. Available in molded black or white.
- Lampholder Support:** 27ga. steel.
- Mounting Clips (3):** 24ga. spring steel, zinc plated. Provide easy snap-in /snap-out action.
- Lamp Guard:** 1 3/4" (45mm) dia. borosilicate glass.

Frame-In Kit

Note: For complete Frame-In Kit specifications, see 300 frame specification sheets.

Labels

CSA, UL Suitable for damp locations.

Job Information

Type:

Job Name:





Cat. No.:

Lamp(s):

Notes:

(FC) is initial footcandles at center of beam.
Beam length (L) and beam width (W) are to
where the candlepower is reduced to 50% of
center beam candlepower.
CBCP is center beam candlepower.
(C) is distance to the center of the beam.

Lamp data shown is typical, and is based on bare
lamp photometrics. Contact lamp manufacturers for
availability and performance.



Lamps	Beam Spread (% NOM. CBCP)	CBCP	Approx. Size (ft.)	0° AIMING ANGLE				30° AIMING ANGLE				30° AIMING ANGLE				45° AIMING ANGLE						
				D	FC	L	W	D	FC	L	W	D	FC	L	W	D	FC	L	W			
MR-16 LOW VOLTAGE HALOGEN BI-PIN LAMPS																						
21W MR-16 VNSP (E2X)	7°	8200	3000	7'	167	6.9'	0.8'	6'	3.5'	146	1.3'	0.8'	2'	3.5'	256	1.0'	0.5'	4'	4.0'	161	1.0'	0.7'
				8'	52	1.2'	1.2'	9'	5.2'	86	1.5'	1.3'	3'	5.2'	114	1.5'	0.7'	8'	8.0'	61	1.5'	1.0'
				12'	46	1.6'	1.6'	12'	6.3'	37	2.0'	1.7'	4'	6.3'	94	2.0'	1.0'	10'	10.0'	45	2.0'	1.4'
29W MR-16 NSP (ESX)	13°	3800	3000	6'	100	1.4'	1.4'	5'	2.9'	84	1.5'	1.3'	2'	3.5'	112	1.3'	0.9'	8'	8.0'	41	1.4'	1.0'
				9'	56	1.8'	1.8'	7'	4.8'	48	2.1'	1.8'	3'	5.2'	50	2.0'	1.4'	8'	8.0'	51	2.2'	1.5'
				10'	36	2.3'	2.3'	9'	5.7'	29	2.7'	2.4'	4'	6.9'	28	1.8'	1.8'	7'	7.0'	26	3.2'	2.3'
29W MR-16 FL (SAB)	40°	525	4000	12'	25	3.7'	3.7'	11'	6.4'	19	3.4'	2.8'	5'	6.9'	18	4.7'	2.3'	9'	9.0'	18	4.2'	2.9'
				2'	133	1.5'	1.5'	2'	1.2'	85	2.3'	1.7'	1'	1.1'	66	4.6'	1.3'	2'	2.2'	48	3.4'	2.1'
				3'	58	2.2'	2.2'	3'	1.1'	38	3.0'	2.5'	2'	2.5'	16	9.7'	2.9'	2'	3.0'	41	9.0'	3.0'
30W MR-16 NSP (FRB)	12°	9300	4000	4'	32	2.9'	2.9'	4'	2.3'	21	4.1'	3.4'	3'	5.2'	7	14.5'	4.4'	4'	4.0'	12	8.7'	4.9'
				5'	21	3.6'	3.6'	5'	2.9'	14	5.1'	4.2'	4'	6.9'	4	19.3'	5.8'	5'	5.0'	7	8.4'	5.1'
				7'	178	1.5'	1.5'	6'	3.5'	157	1.7'	1.5'	2'	3.5'	272	1.7'	0.8'	4'	4.0'	182	1.7'	1.2'
30W MR-16 SP (FRA)	20°	7900	4000	10'	87	2.1'	2.1'	9'	5.2'	70	2.5'	2.2'	3'	5.2'	121	2.6'	1.3'	6'	6.0'	85	2.6'	1.8'
				13'	51	2.7'	2.7'	12'	8.9'	38	3.4'	2.9'	4'	6.9'	86	3.5'	1.7'	8'	8.0'	48	3.4'	2.4'
				16'	34	2.4'	2.4'	15'	8.7'	25	4.2'	3.6'	5'	6.7'	44	4.3'	2.1'	10'	10.0'	31	4.3'	3.0'
30W MR-16 FL (FNA)	40°	1600	4000	8'	108	2.1'	2.1'	6'	2.9'	181	2.4'	2.0'	2'	3.5'	122	3.1'	1.4'	3'	3.0'	153	2.2'	1.5'
				8'	61	2.5'	2.5'	7'	4.0'	92	3.3'	2.8'	4'	6.9'	54	4.3'	2.1'	5'	5.0'	55	3.6'	2.5'
				10'	39	3.5'	3.5'	9'	5.2'	11	4.7'	3.7'	4'	6.9'	36	6.2'	2.9'	7'	7.0'	28	6.1'	3.5'
30W MR-16 MR (VSP)	10°	11500	4000	12'	27	4.2'	4.2'	11'	6.4'	21	5.2'	4.5'	5'	8.7'	26	7.8'	3.5'	9'	9.0'	17	6.6'	4.6'
				4'	180	2.9'	2.9'	3'	1.7'	115	3.0'	2.5'	1'	1.7'	202	4.8'	1.9'	3'	3.0'	65	5.0'	3.1'
				5'	44	4.4'	4.4'	5'	2.9'	42	8.1'	4.2'	2'	3.5'	50	9.7'	2.9'	4'	4.0'	35	9.7'	4.1'
30W MR-16 FL (FNA)	40°	1600	4000	8'	26	5.8'	5.8'	7'	4.0'	21	7.1'	5.8'	3'	5.2'	22	14.5'	4.4'	5'	5.0'	23	8.4'	5.1'
				10'	16	7.3'	7.3'	9'	5.2'	13	9.1'	7.0'	4'	6.9'	13	19.3'	5.8'	5'	5.0'	16	10.1'	6.2'
				8'	180	1.4'	1.4'	7'	4.0'	152	1.6'	1.4'	3'	5.2'	160	2.1'	1.9'	8'	8.0'	193	1.8'	1.2'
30W MR-16 MR (VSP)	10°	11500	4000	12'	80	1.3'	1.3'	18'	5.6'	75	2.3'	2.0'	4'	6.9'	90	2.3'	1.4'	7'	7.0'	63	2.3'	1.7'
				18'	45	2.8'	2.8'	12'	9.5'	44	3.0'	2.6'	4'	6.9'	36	6.2'	2.9'	7'	7.0'	28	6.1'	3.5'
				28'	29	3.5'	3.5'	18'	5.2'	28	3.7'	3.2'	6'	18.4'	40	4.3'	2.1'	11'	11.0'	34	3.9'	2.7'
30W MR-16 MR (VSP)	25°	3500	4000	8'	91	2.7'	2.7'	9'	2.9'	91	3.0'	2.6'	2'	3.5'	105	4.2'	1.8'	3'	3.0'	131	7.6'	1.6'
				8'	55	3.5'	3.5'	7'	4.0'	46	4.2'	3.8'	3'	5.2'	49	6.2'	2.7'	5'	5.0'	49	4.7'	3.1'
				10'	35	4.4'	4.4'	8'	5.2'	28	5.4'	4.6'	4'	6.9'	27	8.3'	2.5'	7'	7.0'	25	6.5'	4.4'
30W MR-16 MR (VSP)	25°	3500	4000	12'	21	5.3'	5.3'	11'	6.4'	19	6.6'	5.6'	5'	8.7'	18	10.4'	4.4'	9'	9.0'	15	8.4'	5.6'
				4'	128	2.9'	2.9'	3'	1.7'	148	3.0'	2.5'	1'	1.7'	258	4.8'	1.5'	3'	3.0'	61	5.0'	3.1'
				6'	57	4.4'	4.4'	5'	2.9'	53	5.1'	4.2'	2'	3.5'	84	9.7'	2.9'	4'	4.0'	15	6.7'	4.1'
30W MR-16 MR (VSP)	40°	2050	4000	8'	32	5.8'	5.8'	7'	4.0'	23	7.1'	5.8'	3'	5.2'	28	14.5'	4.4'	5'	5.0'	25	8.4'	5.1'
				10'	21	7.3'	7.3'	9'	5.2'	18	9.1'	7.0'	4'	6.9'</								