




**2022LV/2000LV Series**  
Standard MR16

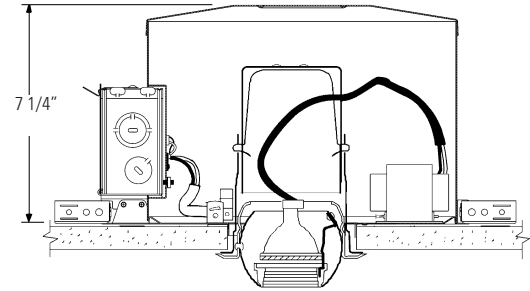

**2022LV/2004ICV/N**  
LyteSeal™ AirSeal® Insulated Ceiling

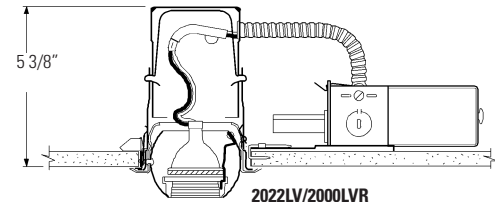

**2022LV/2000LVR**  
Remodeler/Non-IC

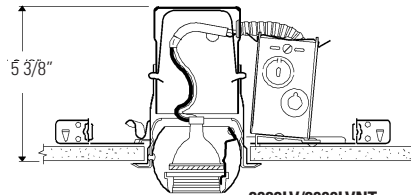

**2022LV/2000LVNT**  
Remote Transformer  
Low Voltage

Complete Fixture consists of Reflector Trim & Frame-In Kit. Select each separately.

| Reflector Trim                    | Frame-In Kit — See Individual Frame-In Kit Specification Sheets |                                    |              |         |
|-----------------------------------|---|------------------------------------|--------------|---------|
|                                   | Low Voltage   |                                    |              |         |
|                                   | Frame-In Kit  | Installation Type                  | Lamping      | Height  |
| 2022LV Matte White w/Black Baffle | 2000LV  | Standard Non-IC                    |              | 5 3/8"  |
|                                   | 2000LVR   | Remodeler Non-IC                   |              | 5 3/8"  |
|                                   | 2000LVRE1   | Remodeler Non-IC                   |              | 5 3/8"  |
|                                   | 2000LVE1  | Electronic Low Voltage Non-IC 120V | 20W-50W MR16 | 5 3/8"  |
|                                   | 2000LVE2  | Electronic Low Voltage Non-IC 277V |              | 5 3/8"  |
|                                   | 2004ICV/N   | LyteSeal AirSeal® IC               | 20W-37W MR16 | 7 1/4"  |
|                                   | 2000LVNT  | Low Voltage Remote Transformer     | 20W-42W MR16 | 5 3/8"  |
|                                   | 2000AICV  | AirSeal® IC                        | 20W-35W MR16 | 7 5/16" |

### Features

- Housing:** Hydroformed aluminum, .040" thick (18 ga.).
- Eyeball Housing:** Die-formed, one piece, aluminum, .040" thick (18 ga.). Provides 358° horizontal rotation and 0° to 45° vertical adjustment; matte white or polished brass finish.
- Step Baffle:** Die-cast aluminum with stepped conical surface for low brightness; precision-fitted into eyeball housing; matte black finish.
- Trim Flange:** Die-formed, aluminum .040" thick (18 ga.). Matte white or polished brass finish.
- Frame-In Kit:** (2000LV standard frame shown) Other frames shown on the right. See Frame-In Kit specification sheets for more details.

### Options & Accessories

**Retaining Clips:** 1955 - For Installing in Existing Ceiling

### Labels

UL (Suitable for Damp Locations), I.B.E.W

| Job Information  | Type: |
|------------------|-------|
| <b>Job Name:</b> |       |
| <b>Cat. No.:</b> |       |
| <b>Lamp(s):</b>  |       |
| <b>Notes:</b>    |       |

631 Airport Road, Fall River, MA 02720 • (508) 679-8131 • Fax (508) 674-4710  
 We reserve the right to change details of design, materials and finish.  
 www.lightolier.com © 2011 Philips Group • J0911