


LINESCAPES

PENDANT HORIZONTAL

Pendant lamp with an efficient highly versatile linear luminous output. Body in extruded aluminum and opal white polycarbonate diffuser.

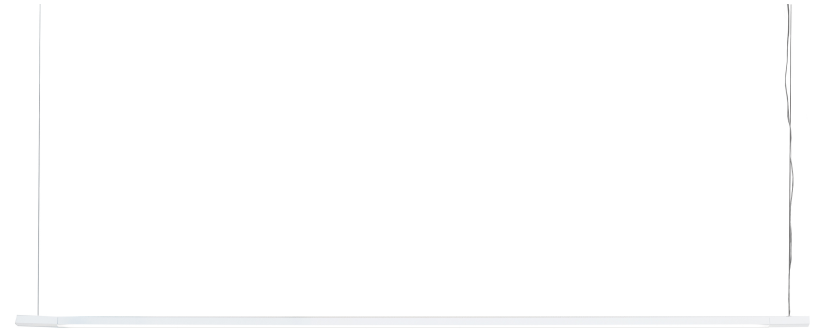

L51 2700K

LAMPING

Source	Linear LED
Total power	32W
Emission	diffused orientable
Switching	dimnable 0-10V
Tension	120V
Color temperature	2700K
Luminous flux	1020lm (luminous output)
Typ CRI	85
IP class	44
Dimensions	51.2 x 0.8
Materials	Aluminum + PC + ABS
Notes	metal cable length 9.9', electrical cable length 16.4', orientable 360°, decentralized canopy, 3500K and 4000K available on request, square cover plate included

Codes

LIN LW2 5D
LIN LN2 5D



Structure

white
black

PACKAGE

Package 01	Dimension: 25.6 x 7.1 x 9.1 inches / Gross weight: 5.5 lbs
Package 02	Dimension: 43.4 x 2 x 2 inches / Gross weight: 2.2 lbs

Certificazioni

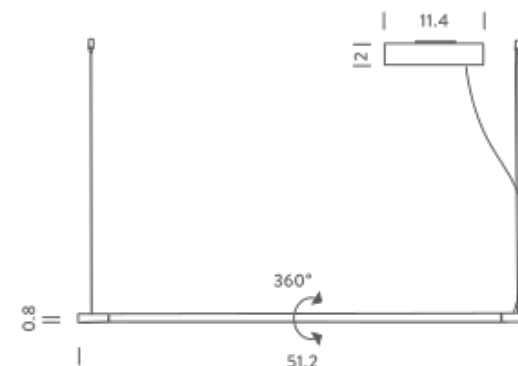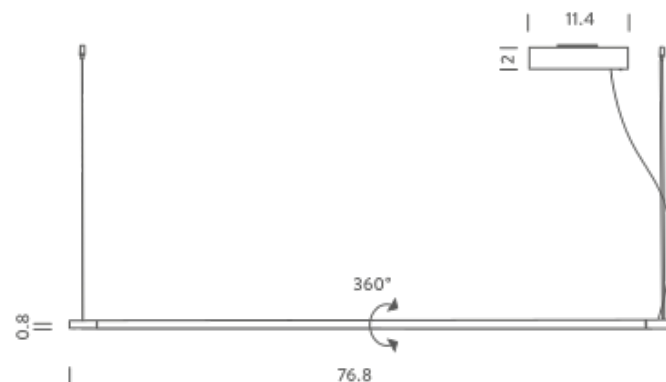

L51 3000K

LAMPING

Source	Linear LED
Total power	32W
Emission	diffused orientable
Switching	dimnable 0-10V
Tension	120V
Color temperature	3000K
Luminous flux	1020lm
Typ CRI	85
IP class	44
Dimensions	51.2 x 0.8
Materials	Aluminium + PC + ABS
Notes	metal cable length 9.9', electrical cable length 16.4', orientable 360°, decentralized canopy, 3500K and 4000K available on request, square cover plate included

Codes

LIN LWW 5D

LIN LNN 5D

Structure

white

black

PACKAGE



Package 01

Dimension: 25.6 x 7.1 x 9.1 inches / Gross weight: 5.5 lbs

Package 02

Dimension: 43.4 x 2 x 2 inches / Gross weight: 2.2 lbs

Certificazioni

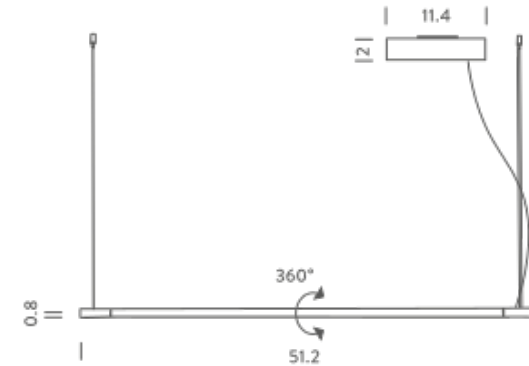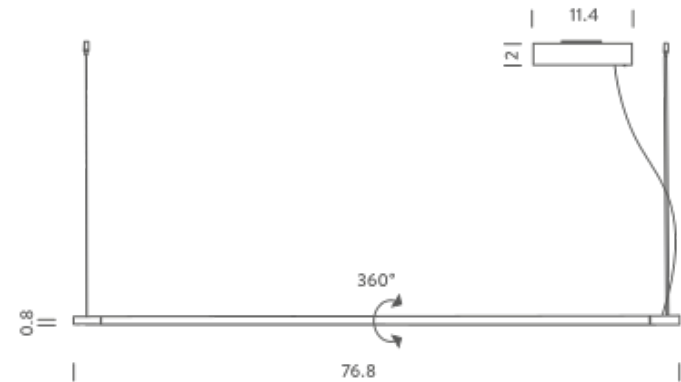

L77 2700K

LAMPING

Source	Linear LED
Total power	48W
Emission	diffused orientable
Switching	dimnable 0-10V
Tension	120V
Color temperature	2700K
Luminous flux	1580lm
Typ CRI	85
IP class	44
Dimensions	76.8 x 0.8
Materials	Aluminium + PC + ABS
Notes	metal cable length 9.9', electrical cable length 16.4', orientable 360°, decentralized canopy, 3500K and 4000K available on request, square cover plate included

Codes

LIN LW2 5E

LIN LN2 5E

Structure

white

black

PACKAGE



Package 01

Dimension: 25.6 x 7.1 x 9.1 inches / Gross weight: 5.5 lbs

Package 02

Dimension: 68.9 x 2 x 2 inches / Gross weight: 2.2 lbs

Certificazioni

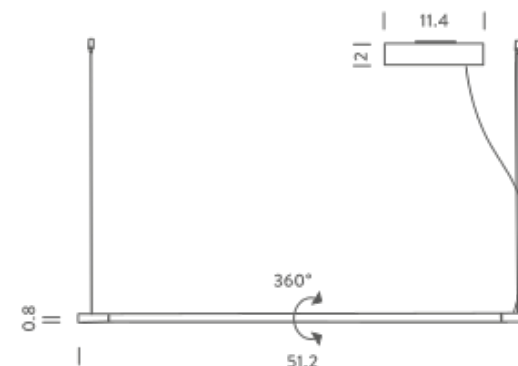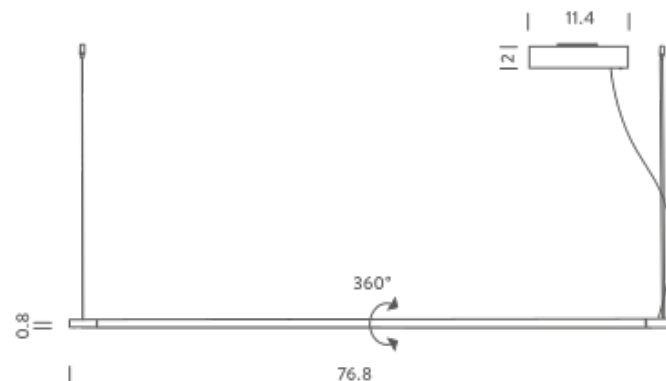

L77 3000K

LAMPING

Source	Linear LED
Total power	48W
Emission	diffused orientable
Switching	dimnable 0-10V
Tension	120V
Color temperature	3000K
Luminous flux	1580lm
Typ CRI	85
IP class	44
Dimensions	76.8 x 0.8
Materials	Aluminium + PC + ABS
Notes	metal cable length 9.9', electrical cable length 16.4', orientable 360°, decentralized canopy, 3500K and 4000K available on request, square cover plate included

Codes

LIN LWW 5E
LIN LNN 5E

Structure

white
black

PACKAGE

Package 01	Dimension: 25.6 x 7.1 x 9.1 inches / Gross weight: 5.5 lbs
Package 02	Dimension: 68.9 x 2 x 2 inches / Gross weight: 2.2 lbs

Certificazioni

