



Volume 1

Basic devices and single-space systems

Specification guide to wallbox dimmers, switches, sensors and accessories for commercial and residential applications

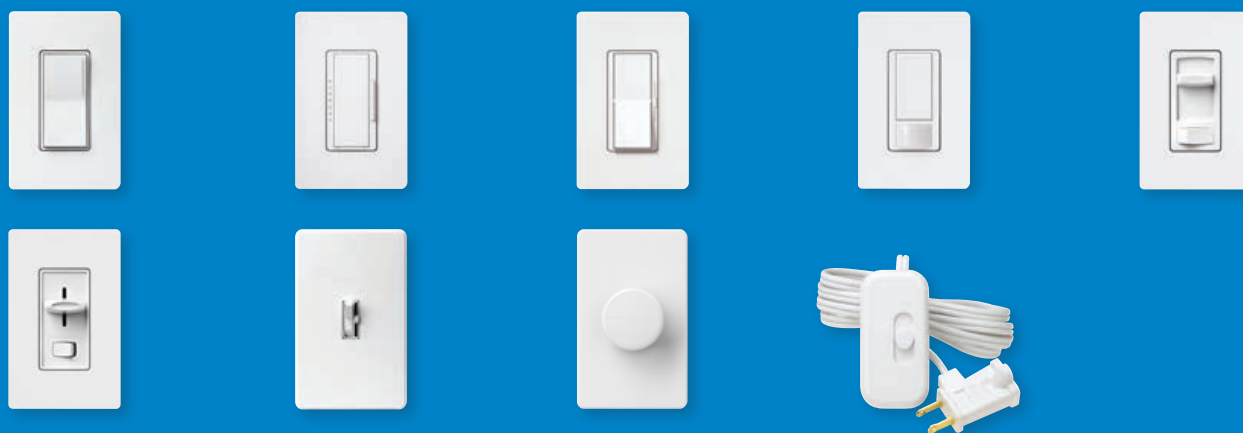

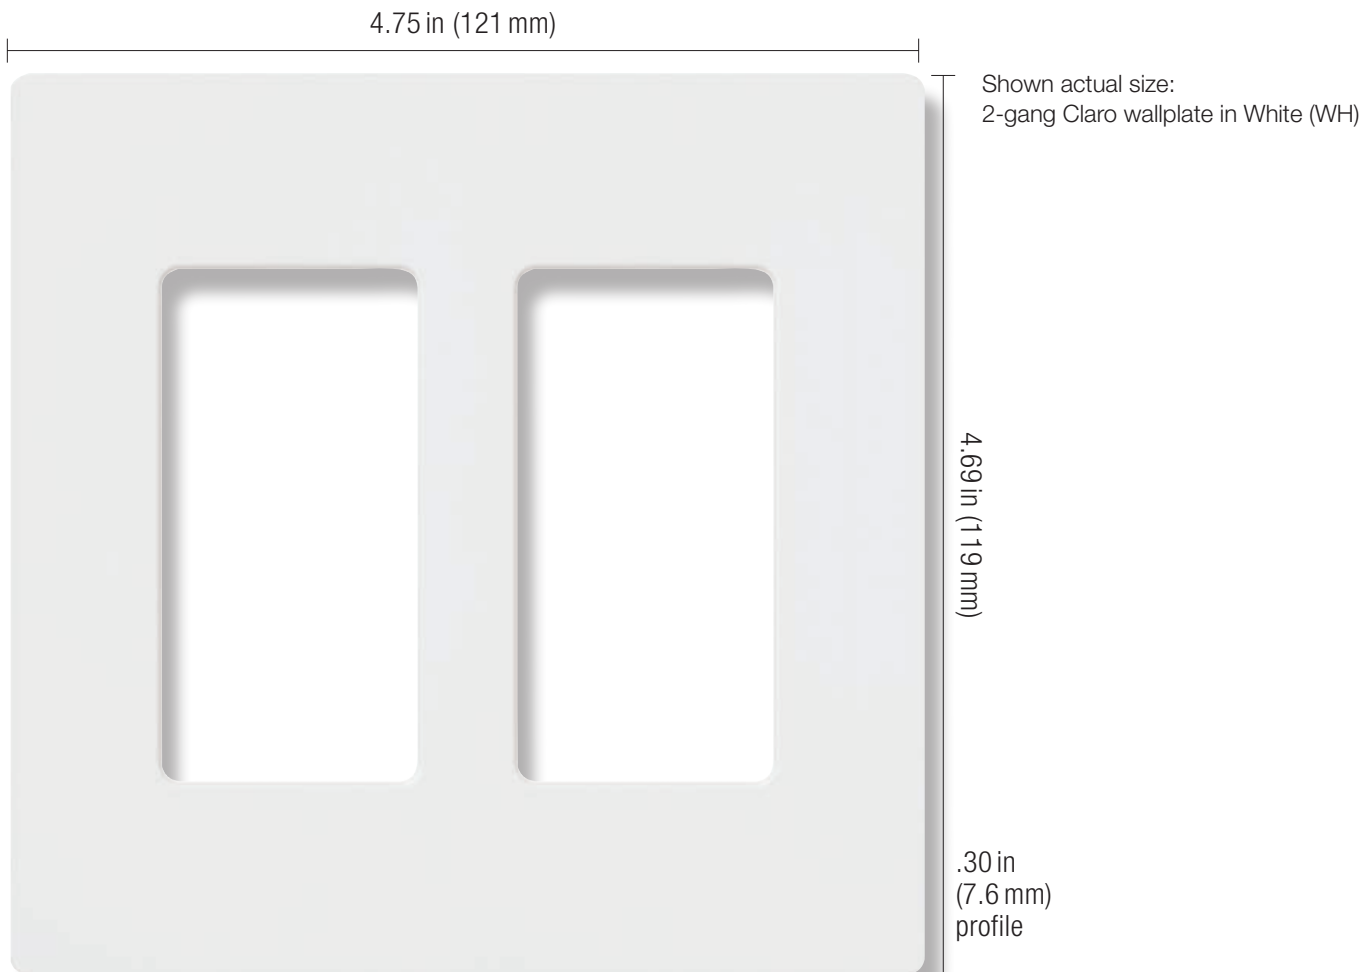

Product family features

- Can be used in conjunction with the following dimmer(s), switch(es), sensor(s), and accessories: Caséta Wireless, Diva, Luméa, Maestro, Pico wireless, Skylark, Skylark Contour, Sunnata, Vive Maestro Wireless controls, and Vive accessories
- All Lutron wallplates are screwless, seamless, and have no visible hardware; the front plate securely snaps into the alignment adapter plate
- Full line of wiring devices in Designer style opening
- Blank inserts available for Gloss (DV-BI-) and Satin Finishes (SC-BI-)
- Customize your designer wallplate with engraving; visit lutron.com/engraving to get started

Ganging and derating

- Designer wallplates use standard ganging
- Requires fins to be removed from dimmers for proper spacing
- May require derating (i.e., reduction of dimmer capacity due to fin removal)

Available finishes

Use **BOLD** color code in model number (Example: SC-1-**SL**)


Gloss



WH
White



LA
Light Almond



AL
Almond



IV
Ivory



GR
Gray



BR
Brown



BL
Black

Satin Finishes**



BW
Brilliant White



GL
Glacier White



SW
Snow White



RW
Architectural
White



LG
Lunar Gray



MI
Mist



PB
Pebble



CS
Cobblestone



SL
Slate



MN
Midnight



BI
Biscuit



SD
Sand



TP
Taupe



PM
Pumice

Metal wallplate*



CY
Clay



SA
Sage



EP
Espresso



TF
Truffle



DE
Deep Sea



SR
Signal Red




SS
Stainless Steel

* Stainless Steel metal wallplates include black plastic trim/adaptor, visible from side. Match with separate Black (BL) or Midnight (MN) controls and accessories.

** Old Satin Colors are available while supplies last. To view, visit lutron.com/claro

Wallplates for Caséta Wireless, Diva, Luméa, Maestro, Maestro Wireless, Pico wireless, Skylark, Skylark Contour, Sunnata, Vive Maestro Wireless controls, and Vive accessories

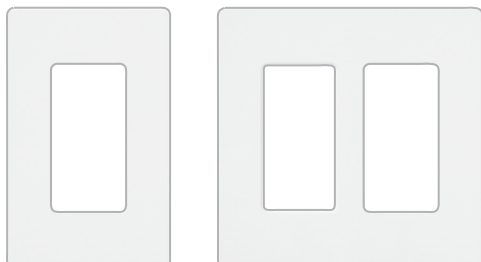


1-gang ^{*,**}	CW-1- XX ¹
W: 2.94 in (75 mm)	SC-1- XX ²
2-gang ^{*,**}	CW-2- XX ¹
W: 4.75 in (121 mm)	SC-2- XX ²
3-gang ^{*,**}	CW-3- XX ¹
W: 6.56 in (167 mm)	SC-3- XX ²
4-gang ^{*,**}	CW-4- XX ¹
W: 8.37 in (213 mm)	SC-4- XX ²
5-gang [*]	CW-5- XX ¹
W: 10.18 in (259 mm)	SC-5- XX ²
6-gang [*]	CW-6- XX ¹
W: 12 in (305 mm)	SC-6- XX ²

Important note

Multiple devices with line and low-voltage can be mounted behind a common wallplate using a standard barrier backbox. For more information consult Lutron Application Note #213, Combining Low-Voltage and Line Voltage Wiring Devices in a Multi-Gang Box, at lutron.com/applicationnotes.

XX¹: Gloss and metal color codes
XX²: Satin colors codes
XX³: Gloss color codes
XX⁴: Available in Snow (SW), Biscuit (BI), Midnight (MN), Taupe (TP), Mist (MI), and Signal Red (SR)



Custom engraving available for all Designer, Traditional, New Architectural, and Architectural style wallplates (except Stainless Steel). For wallplate engraving schedules, go to lutron.com/engraving.

Cable jacks



- F-style, 75-Ohm coaxial cable
- Wallplate sold separately

Single cable jack

CA-CJ-**XX**³
 SC-CJ-**XX**⁴

Telephone jacks



- 6-conductor telephone jack, RJ11
- Wallplate sold separately

Single telephone jack

CA-PJ-**XX**³
 SC-PJ-**XX**⁴

6-port frame



- Shipped with six blanks in matching colors
- Connectors sold separately
- Connectors snap in (no tools required)
- Connectors available in White (WH), unless noted

Field customizable 6-port frame

6-port frame	CA-6PF- XX ¹ SC-6PF- XX ⁴
--------------	--

Connectors for 6-port frame



Telephone/network jacks

8-conductor, RJ45 category 5e	CON-1P-C5E- XX ³
8-conductor, RJ45 category 6	CON-1P-C6- XX ³

Fiber jacks



MT-RJ feed through	CON-1F-MTRJ-WH
--------------------	----------------



SC simplex	CON-1F-SC-WH
------------	--------------



LC non-flush mount	CON-1F-LC-WH
--------------------	--------------



ST-style	CON-1F-ST-WH
----------	--------------



Cable jack

F-style, 75-Ohm coaxial cable	CON-1C- XX ³
----------------------------------	--------------------------------



BNC jack

BNC connector, 50-Ohm	CON-1B-WH
-----------------------	-----------

Connectors only for use with 6-port frame.

Receptacles



- Tamper-resistant receptacles include tamper-resistant shutter mechanism (shutters are white)

Receptacles

15 A 125V	CAR-15- XX ¹ SCR-15- XX ²
20 A 125V	SCR-20- XX ²

Tamper-resistant receptacles

15 A 125V	CARS-15-TR- XX ¹ SCRS-15-TR- XX ²
20 A 125V	SCRS-20-TR- XX ²

USB receptacles



- Includes two USB ports
- Ports are rated for a minimum of 10,000 insertions and removals

Tamper-resistant USB receptacles

15 A 125V	CAR-15-UBTR- XX ¹ SCR-15-UBTR- XX ²
-----------	--

XX¹: Gloss color codes

XX²: Satin color codes

XX³: Available in White (WH) and Black (BL)

XX⁴: Available in Snow (SW), Biscuit (BI),
Midnight (MN), Taupe (TP), Mist (MI),
and Signal Red (SR)

Wallplates not included. Order separately.