


# PORTCULLIS

Not just a fan, the Portcullis FanDelight is framed within a woven metal grate pattern in a rich Bronze Gilt finish. The interior gold finish adds warmth to the candelabras that are shielded with a curved reflector backplate not to be disrupted by the circulating fan blades behind it. With a full range of fan control and Wifi-enabled, this fixture is not only attractive, but full of functional features.

- Forged iron woven metal shade
- Bronze Gilt finish with coordinating reflector shades on candelabra
- DC Motor
- LED bulbs included
- Wifi-enabled FanDelight



**61016BZGT**  
Fandelight  
A

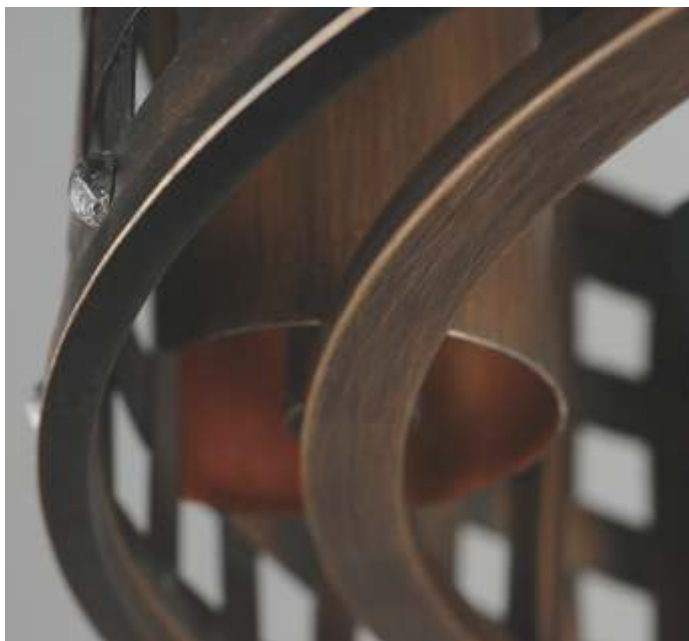

WALL CONTROL

### Energy Information at High Speed

ITEM#	Airflow	Electricity Use (excludes lights)	Airflow Efficiency
61016	2600 CFM	27.3W	95 CFM / W

**Compare:** 49" to 60" ceiling fans have airflow efficiencies ranging from approximately 51 to 176 cubic feet per minute per watt at high speed.

ITEM#	LAMPING	VOLTAGE	DIMENSION	BLADES	SPEED	LUMENS			Additional Info.
						CRI	INIT.	DEL.	
A 61016	6 x 4W E12 LED 3000K (Incl.)	DC 120V	32.75"W x 18"H	3 x 22"	6 Speed	80+	1988	1988	

Finish: Bronze (BZ) Gilt (GT)