


LEE BROOM

ORION TUBE LIGHT

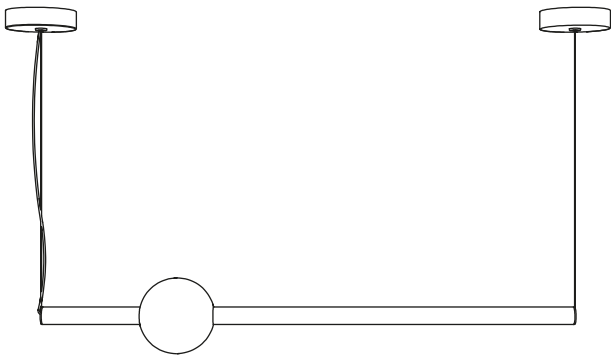


ATTENTION! BEFORE YOU START

- Orion must be installed by a qualified electrician
- Ensure power supply is disconnected prior to installation
- This product is for interior use only and should be installed in a dry environment only
- Please read the instructions carefully before you commence install
- Orion can be suspended either horizontally or vertically
- Orion is supplied ready for horizontal suspension
- To convert to vertical suspension options, please see next section

ASSEMBLY - please see associated diagrams overleaf

- TERMINATE ALL MAINS WIRES BEFORE INSTALLATION
 - DO NOT REMOVE THE DRIVER SUPPLIED
1. Create one suitable hole in the ceiling positioned exactly where the electrical power supply is located for the pendant light. The hole in ceiling is to house the LED driver. Ensure hole is big enough to fit LED driver but not so big that ceiling plate cannot be securely fixed.
 2. Separate back plate from ceiling plate cover by unscrewing end nut.
 3. Open cover on connector block junction box to access terminals.
 4. Connect mains power to connector block terminals. Use the cable insulation sleeve provided.
 5. Close cover on the connector block junction box.
 6. Position junction box and LED driver in the hole in the ceiling.
 7. Mount back plate to required position on ceiling. Always use the appropriate fixings for the ceiling material.
 8. Set desired drop height of the pendant. Pass tensile wire up through cable glider to raise the pendant light. To adjust pendant light lower, support full weight of pendant light, depress the nozzle of cable glider and pass the tensile wire down.
 9. To adjust length of electrical cord, loosen screw on cord restraint and pass electrical cord through cord restraint. Tighten screw on cord restraint at desired length. Allow some slack in electrical cord so that full weight of pendant light is supported by the tensile wire.
 10. Reattach ceiling plate cover by threading end nut into the back plate.
 11. For horizontal suspension, position the second ceiling plate 87.5cm away centre to centre of each ceiling plate.

CONTENTS

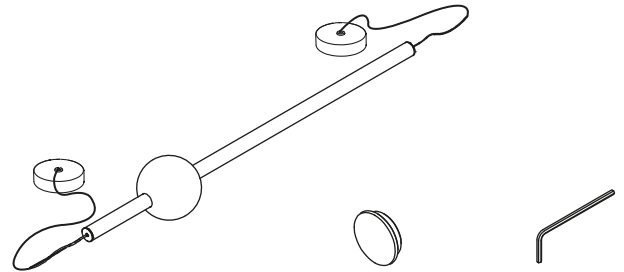

1 x Orion Tube Light

1 x Spare End Cap

1 x Allen Key

HORIZONTAL TO VERTICAL SUSPENSION

1. Unscrew and remove the caps at both ends.
2. At end with the tensile wire only, pull out the internal LED fixture by approximately 10 cm / 4 inches.
3. Peel back LED tape by 5 cm / 2 inches.
4. Unscrew the two grub screws and remove the end coupler.
5. Push the tensile wire through the end coupler remove.

SKIP STEP 6-8 IF VERTICAL SUSPENSION IS AS DESIRED

6. Slide tube and globe assembly off internal LED fixture.
7. Flip tube and globe assembly.
8. Slide tube and globe assembly back over internal LED fixture.
9. Replace end coupler and grub screws.
10. Reapply LED tape. If tape loses self-adhesive backing, secure with supplied transparent cable tie.
11. Screw cap back onto electrical cord end.
12. Screw spare cap supplied without hole onto end with no cord and wire.

CARE AND CLEANING

- Only clean when Orion is switched off
- Please allow a suitable cooling period before cleaning
- Only use a non-abrasive, soft, dry cloth when cleaning Orion

For more information please contact:

US & Canada Inquiries: +1 212 804 8477 - 34 Greene Street, New York, NY 10013 - sales@leebroom.com


UK & Global Inquiries: +44 207 820 0742 - 95 Rivington Street, London, EC2A 3AY - info@leebroom.com

WWW.LEEBROOM.COM




ASSEMBLY


1.




2.




3.

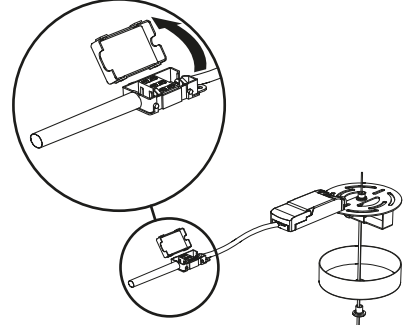


4.

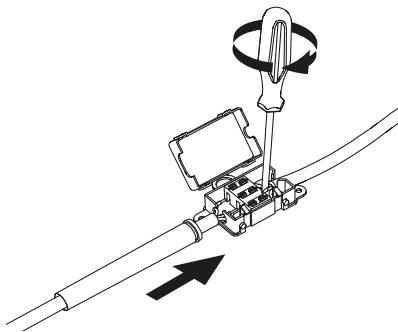


5.

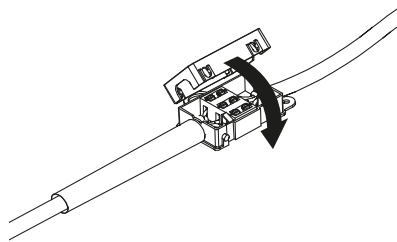


6.

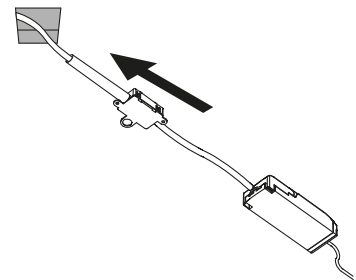


7.

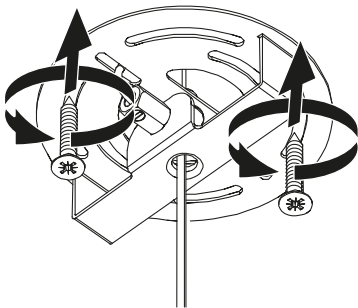


8.




9.



10.




11.

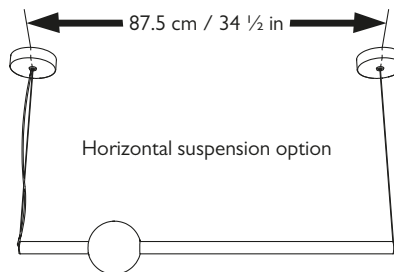

See next section to convert Orion from horizontal suspension to either of the vertical suspension options below:

Vertical Option 1 Vertical Option 2



For more information please contact:

US & Canada Inquiries: +1 212 804 8477 - 34 Greene Street, New York, NY 10013 - sales@leebrook.com


UK & Global Inquiries: +44 207 820 0742 - 95 Rivington Street, London, EC2A 3AY - info@leebrook.com

WWW.LEEBROOM.COM




CONVERSION FROM HORIZONTAL SUSPENSION TO VERTICAL SUSPENSION


1.

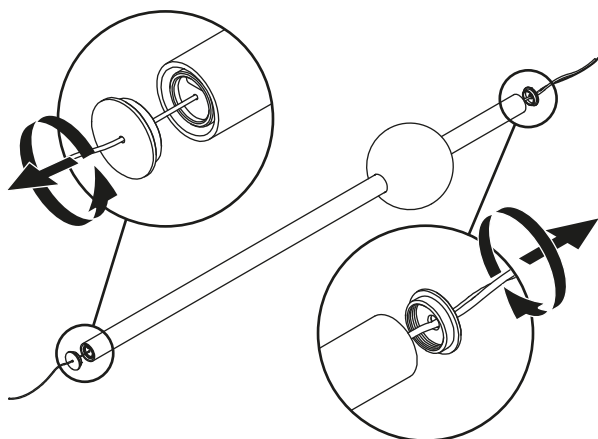


2.

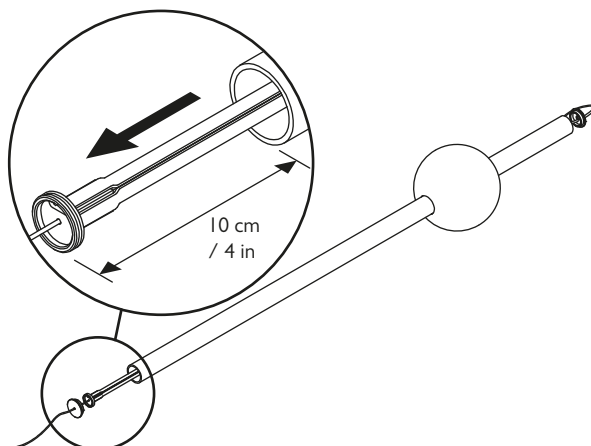


3.

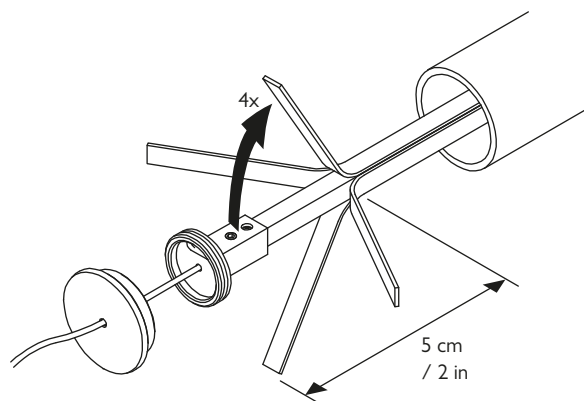


4.

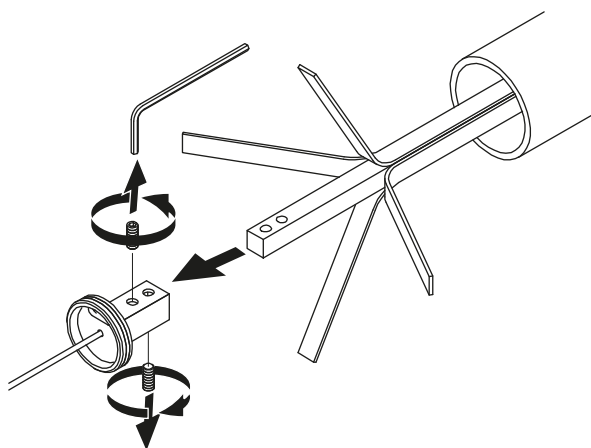

5.

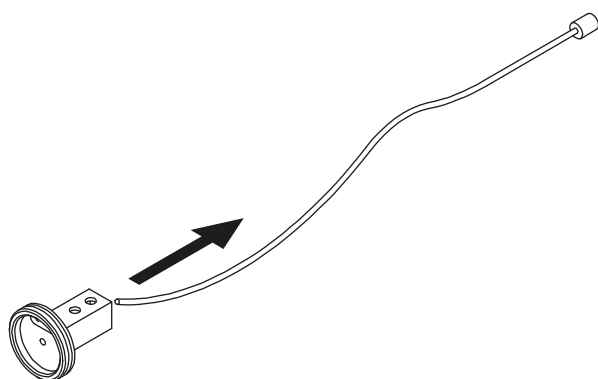

6.

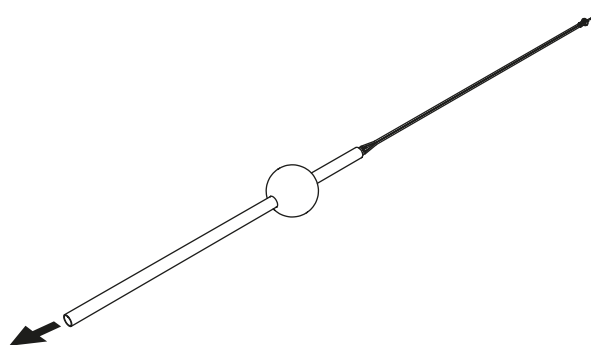


For more information please contact:

US & Canada Inquiries: +1 212 804 8477 - 34 Greene Street, New York, NY 10013 - sales@leebroom.com


UK & Global Inquiries: +44 207 820 0742 - 95 Rivington Street, London, EC2A 3AY - info@leebroom.com

WWW.LEEBROOM.COM


7.

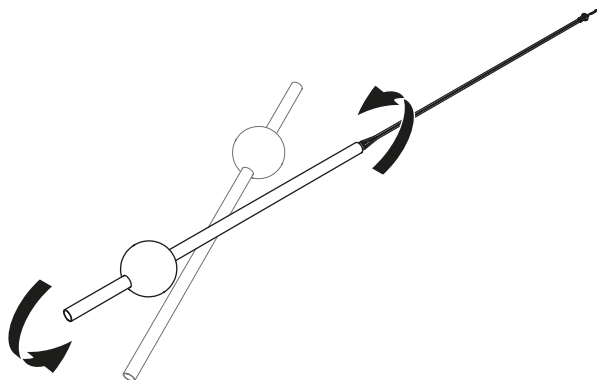


8.

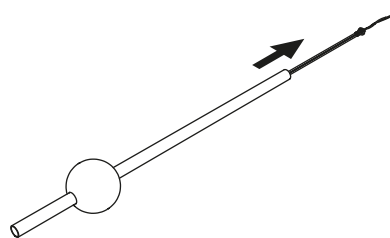


9.

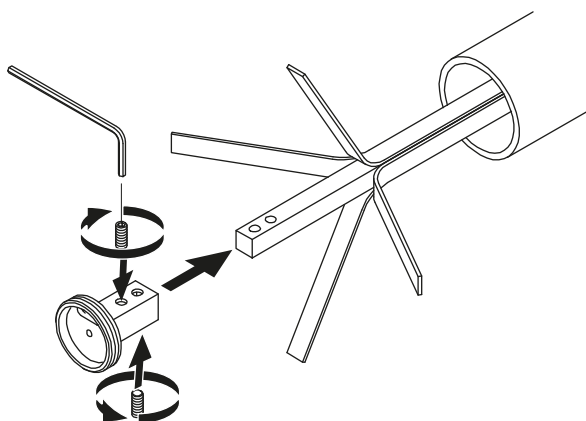


10.

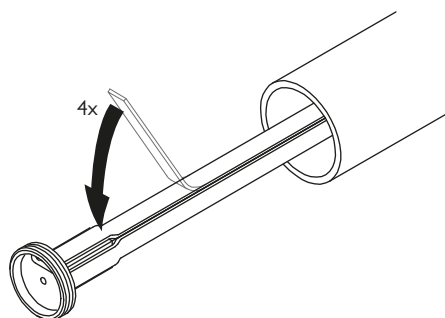

11.

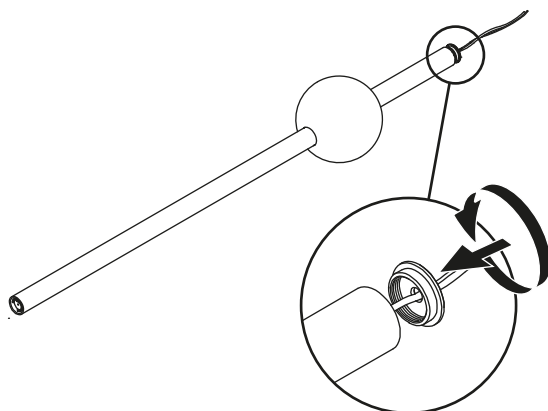

12.

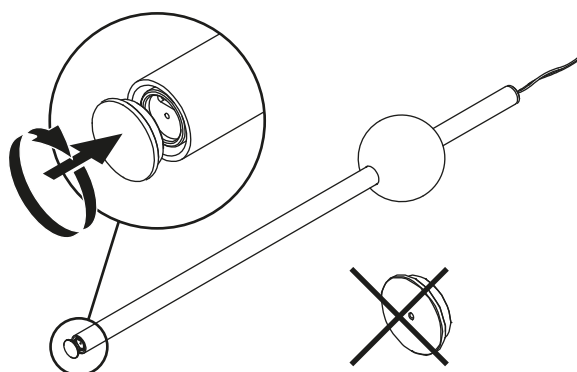

For more information please contact:

US & Canada Inquiries: +1 212 804 8477 - 34 Greene Street, New York, NY 10013 - sales@leebrook.com

UK & Global Inquiries: +44 207 820 0742 - 95 Rivington Street, London, EC2A 3AY - info@leebrook.com

WWW.LEEBROOM.COM

