

# LUSTRE Chandelier

## 3-24-xx

oxygen

FIXTURE TYPE \_\_\_\_\_

LOCATION \_\_\_\_\_

PROJECT \_\_\_\_\_

DATE \_\_\_\_\_




-15 Black (stems included)



-40 Aged Brass (flush mount hardware included)

<b>LIGHT SOURCE</b>	(6x) 5.3W LED Arrays, 3000K, CRI 90
<b>LUMINAIRE POWER</b>	31.7W at 120V
<b>RATED LIFE</b>	30000 hr RL
<b>OPTIONAL COLOR TEMPERATURES</b>	3000K Only
<b>LUMEN OUTPUT</b>	Delivered: 1129 lm (LM-79)
<b>INPUT VOLTAGE</b>	120V AC, 50/60Hz
<b>DRIVER OUTPUT</b>	900mA, 32.4W max power
<b>DIMMING</b>	TRIAC Dimming
<b>CONSTRUCTION</b>	Cold Rolled Steel Housing and Canopy
<b>DIFFUSER</b>	- Clear Bubble Glass
<b>FINISHES</b>	Black (-15), Aged Brass (-40)
<b>MOUNTING</b>	4" Octagonal J-Box
<b>STANDARDS</b>	cETL Damp listed, Conforms to UL STD 1598, Certified CAN/CSA STD C22.2 No 250.0.

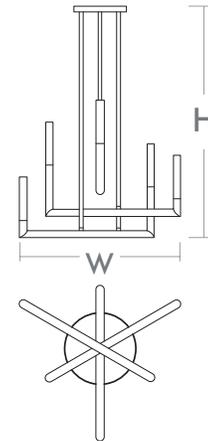

### DIMENSIONS

**W. Fixture:** 25.25"

**H. Fixture:** 33.00"\*

**Supplied with 2-8", 2-12", and 3-16" stems to customize hanging height**  
**Flush mount hardware included**

\*Height measured using flush mount hardware

Note: Canopy swivel allows up to a 45° slope

Order example for standard fixture:  
**3-24-15** (x- Voltage - xxx-Sequence # - xx-Finish)  
**3:** 120V Only

