

DARIO Wall Sconce
3-400-xxxx

oxygen

FIXTURE TYPE _____


LOCATION _____

PROJECT _____

DATE _____



-1541 Black/Weathered Oak



-640 White/Aged Brass




-1524 Black/Satin Nickel



-1540 Black/Aged Brass

- LIGHT SOURCE** (2x) 3W LED Arrays, 3000K, CRI 90
- LUMINAIRE POWER** 7.3W Input Power
- RATED LIFE** 60000 hr RL
- OPTIONAL COLOR TEMPERATURES** 2700K, 3500K, 4000K
- LUMEN OUTPUT** Delivered: 270 lm (LM-79)
- INPUT VOLTAGE** 120V to 277V AC, 50/60Hz
- DRIVER OUTPUT** 180mA, 7.6W max power
- DIMMING** TRIAC and ELV dimming at 120V AC;
0-10V dimming, 100% to 10% current output
- CONSTRUCTION** Cold Rolled Steel Housing
- DIFFUSER** - Matte White Acrylic
- FINISHES** White/Aged Brass (-640), Black/Satin Nickel (-1524),
Black/Aged Brass (-1540), Black/Weathered Oak (-1541)
- MOUNTING** 4" Octagonal J-Box*, 4" Square J-Box*,
4" Square J-Box* with a single device mud ring
*Deep J-Box (Required to house driver)
- STANDARDS** cUL Damp Listed, ADA Compliant, Conforms to
UL STD 1598, Certified CAN/CSA STD C22.2 No 250.0.

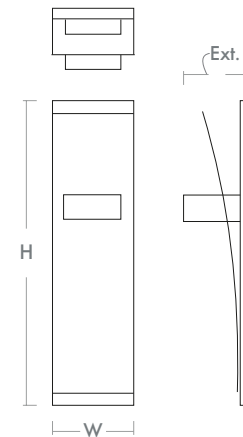

DIMENSIONS

- W:** 4.25"
- H:** 16.00"
- Ext:** 3.25"
- M.C:** 8.00" From top of fixture

Order example for standard fixture:

3-400-640 (x-xxx: LED Sequence # / -xx: Finish)

Order example for optional color temperatures: **3-400-27640**

27: 2700K, **35:** 3500K, **40:** 4000K

