

**ZORA Wall Sconce**  
**3-50-xxxx**

oxygen

FIXTURE TYPE \_\_\_\_\_

LOCATION \_\_\_\_\_


PROJECT \_\_\_\_\_

DATE \_\_\_\_\_



-650 White/Industrial Brass

<b>LIGHT SOURCE</b>	(1x) 12.5W LED Array, 3000K, CRI 90
<b>LUMINAIRE POWER</b>	12.4W Input Power
<b>RATED LIFE</b>	30000 hr RL
<b>OPTIONAL COLOR TEMPERATURES</b>	3000K Only
<b>LUMEN OUTPUT</b>	Delivered: 564 lm (LM-79)
<b>INPUT VOLTAGE</b>	120V AC, 50/60Hz
<b>DRIVER OUTPUT</b>	300mA, 10.8W max power
<b>DIMMING</b>	TRIAC Dimming
<b>CONSTRUCTION</b>	Cold Rolled Steel Housing and Aluminum
<b>DIFFUSER</b>	- Matte White Acrylic
<b>FINISHES</b>	White/Industrial Brass (-650), Black/Industrial Brass (-1550)
<b>MOUNTING</b>	4" Octagonal J-Box
<b>STANDARDS</b>	cETL Damp listed, ADA Compliant, Conforms to UL STD 1598, Certified CAN/CSA STD C22.2 No 250.0.

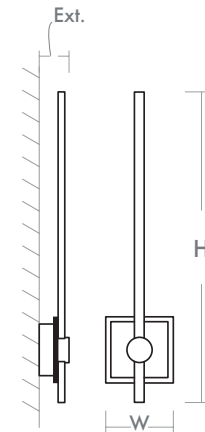

**DIMENSIONS**

<b>W:</b>	<b>5.13"</b>
<b>H:</b>	<b>23.88"</b>
<b>Ext:</b>	<b>2.19"</b>
<b>M.C:</b>	<b>19.81" From top of fixture</b>

Fixture can swivel/rotate 45 degrees

Order example for standard fixture:  
**3-50-650** (x- Voltage - xxx-Sequence # - xx-Finish)  
**3:** 120V Only

