

APOLLO Vanity

120v : **3-524-xx**

277v : **37-524-xx**

oxygen

FIXTURE TYPE _____ LOCATION _____

PROJECT _____ DATE _____



-22 Oiled Bronze



Alternative position



-14 Polished Chrome




-24 Satin Nickel



-40 Aged Brass

LIGHT SOURCE	2 x 10.1W LED, 3000K, CRI 90
LUMINAIRE POWER	26.1W at 120V
RATED LIFE	60000 hr RL
OPTIONAL COLOR TEMPERATURES	2700K, 3500K, 4000K
LUMEN OUTPUT	Delivered: 1727 lm (LM-79)
INPUT VOLTAGE	120V or 277V
DRIVER OUTPUT	2 x 350mA, 12W
DIMMING	0-10v & Phase (ELV) Dimming - 50/60Hz 100% to 10% Dimming
CONSTRUCTION	Plated Steel and Acrylic
DIFFUSER	- Matte White Acrylic
FINISHES	Polished Chrome (-14), Oiled Bronze (-22), Satin Nickel (-24), Aged Brass (-40)
MOUNTING	2"x 3" J-Box
STANDARDS	ETL Dry/Damp listed, ADA compliant, CEC Title 24 Compliant, Conforms to UL STD 1598, Certified CAN/CSA, STD C22.2 No 250.0.

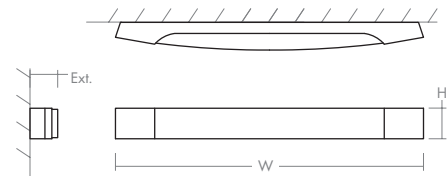

DIMENSIONS

W: 27.75"

H: 2.75"

Ext: 2.50"

M.C: 1.38" From top of fixture

Order example for standard fixture:

3-524-24 (x- Voltage - xxx-Sequence # - xx-Finish)

3: 120v, 37: 277v

Order example for optional color temperatures: **3-524-2724**

27: 2700K, 35: 3500K, 40: 4000K



APOLLO Vanity


120v : **3-525-xx**

277v : **37-525-xx**

oxygen

FIXTURE TYPE _____ LOCATION _____

PROJECT _____ DATE _____

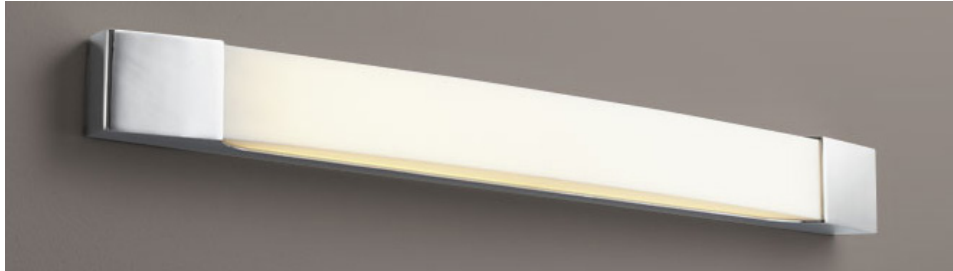

-14 Polished Chrome



Alternative position



-22 Oiled Bronze




-24 Satin Nickel



-40 Aged Brass

LIGHT SOURCE	2 x 10.1W LED, 3000K, CRI 90
LUMINAIRE POWER	25.9W at 120V
RATED LIFE	60000 hr RL
OPTIONAL COLOR TEMPERATURES	2700K, 3500K, 4000K
LUMEN OUTPUT	Delivered: 1751 lm (LM-79)
INPUT VOLTAGE	120V or 277V
DRIVER OUTPUT	2 x 350mA, 12W
DIMMING	0-10v & Phase (ELV) Dimming - 50/60Hz 100% to 10% Dimming
CONSTRUCTION	Plated Steel and Acrylic
DIFFUSER	- Matte White Acrylic
FINISHES	Polished Chrome (-14), Oiled Bronze (-22), Satin Nickel (-24), Aged Brass (-40)
MOUNTING	2"x 3" J-Box
STANDARDS	ETL Dry/Damp listed, ADA compliant, CEC Title 24 Compliant, Conforms to UL STD 1598, Certified CAN/CSA, STD C22.2 No 250.0.

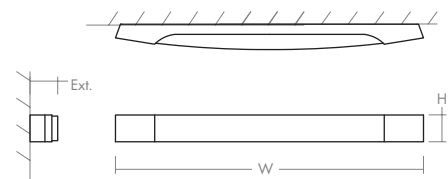

DIMENSIONS

W: 32.00"

H: 2.75"

Ext: 2.50"

M.C: 1.38" From top of fixture

Order example for standard fixture:

3-525-24 (x- Voltage - xxx-Sequence # - xx-Finish)

3: 120v, 37: 277v

Order example for optional color temperatures: **3-525-2724**

27: 2700K, 35: 3500K, 40: 4000K



APOLLO Vanity

120v : **3-526-xx**

277v : **37-526-xx**

oxygen

FIXTURE TYPE _____ LOCATION _____

PROJECT _____ DATE _____



-14 Polished Chrome



Alternative position



-22 Oiled Bronze




-24 Satin Nickel



-40 Aged Brass

LIGHT SOURCE	2 x 11.6W LED, 3000K, CRI 90
LUMINAIRE POWER	29.5W at 120V
RATED LIFE	60000 hr RL
OPTIONAL COLOR TEMPERATURES	2700K, 3500K, 4000K
LUMEN OUTPUT	Delivered: 2370 lm (LM-79)
INPUT VOLTAGE	120V or 277V
DRIVER OUTPUT	2 x 350mA, 12W
DIMMING	0-10v & Phase (ELV) Dimming - 50/60Hz 100% to 10% Dimming
CONSTRUCTION	Plated Steel and Acrylic
DIFFUSER	- Matte White Acrylic
FINISHES	Polished Chrome (-14), Oiled Bronze (-22), Satin Nickel (-24), Aged Brass (-40)
MOUNTING	2"x 3" J-Box
STANDARDS	ETL Dry/Damp listed, ADA compliant, Conforms to UL STD 1598, Certified CAN/CSA, STD C22.2 No 250.0.

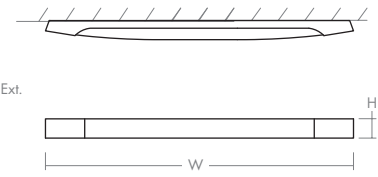

DIMENSIONS

W: 54.00"

H: 2.75"

Ext: 2.50"

M.C: 1.38" From top of fixture

Order example for standard fixture:

3-526-24 (x- Voltage - xxx-Sequence # - xx-Finish)

3: 120v, 37: 277v

Order example for optional color temperatures: **3-526-2724**

27: 2700K, 35: 3500K, 40: 4000K

