

BALANCE Vanity

120v : **3-547-xx-BPxx**

277v : **37-547-xx-BPxx**

oxygen

FIXTURE TYPE _____ LOCATION _____

PROJECT _____ DATE _____




-24 Satin Nickel



-20 Polished Nickel

LIGHT SOURCE	1 x 11.9W LED, 3000K, CRI 90
LUMINAIRE POWER	14.5W at 120V
RATED LIFE	60000 hr RL
OPTIONAL COLOR TEMPERATURES	2700K, 3500K, 4000K
LUMEN OUTPUT	Delivered: 1020 lm (LM-79)
INPUT VOLTAGE	120V or 277V
DRIVER OUTPUT	350mA, 12W
DIMMING	0-10v & Phase (ELV) Dimming - 50/60Hz 100% to 10% Dimming
CONSTRUCTION	Plated Steel and Acrylic
DIFFUSER	- Matte White Acrylic
FINISHES	Polished Nickel (-20), Satin Nickel (-24)
MOUNTING	4" Octagonal J-Box, 2" x 3" J-Box
STANDARDS	ETL Dry/Damp listed, ADA Compliant, CEC Title 24 Compliant, Conforms to UL STD 1598, Certified CAN/CSA, STD C22.2 No 250.0.

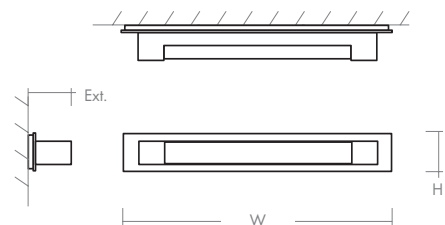

DIMENSIONS

W:	28.75"
H:	4.50"
Ext:	4.00"
M.C:	2.25" From top of fixture

Order example for standard fixture:

3-547-24-BP24

(x- Voltage - xxx-Sequence # - xx-Finish - BPxx- Backplate Finish)

3: 120v, 37: 277v

Order example for optional color temperatures: **3-547-2724-BP24**

27: 2700K, 35: 3500K, 40: 4000K



BALANCE Vanity

120v : **3-549-xx-BPxx**

277v : **37-549-xx-BPxx**

oxygen

FIXTURE TYPE _____ LOCATION _____

PROJECT _____ DATE _____




-20 Polished Nickel



-24 Satin Nickel

LIGHT SOURCE	2 x 11.9W LED, 3000K, CRI 90
LUMINAIRE POWER	28.6W at 120V
RATED LIFE	60000 hr RL
OPTIONAL COLOR TEMPERATURES	2700K, 3500K, 4000K
LUMEN OUTPUT	Delivered: 2022 lm (LM-79)
INPUT VOLTAGE	120V or 277V
DRIVER OUTPUT	2 x 350mA, 12W
DIMMING	0-10v & Phase (ELV) Dimming - 50/60Hz 100% to 10% Dimming
CONSTRUCTION	Plated Steel and Acrylic
DIFFUSER	- Matte White Acrylic
FINISHES	Polished Nickel (-20), Satin Nickel (-24)
MOUNTING	4" Octagonal J-Box with optional backplate, 2" x 3" J-Box
STANDARDS	ETL Dry/Damp listed, ADA Compliant, Conforms to UL STD 1598, Certified CAN/CSA, STD C22.2 No 250.0.

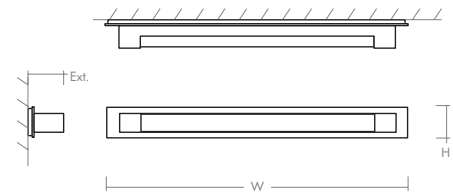

DIMENSIONS

W: 52.75"

H: 4.50"

Ext: 4.00"

M.C: 2.25" From top of fixture

Order example for standard fixture:

3-549-24-BP24

(x- Voltage - xxx-Sequence # - xx-Finish - BPxx- Backplate Finish)

3: 120v, 37: 277v

Order example for optional color temperatures: **3-549-2724-BP24**

27: 2700K, 35: 3500K, 40: 4000K

