

CHAMELEON Wall Sconce

120v : **3-514-xx**

277v : **37-514-xx**

oxygen

FIXTURE TYPE _____ LOCATION _____

PROJECT _____ DATE _____



-40 Aged Brass



-14 Polished Chrome




-24 Satin Nickel



-22 Oiled Bronze

LIGHT SOURCE	1 x 11.9W LED, 3000K, CRI 90
LUMINAIRE POWER	13.1W at 120V
RATED LIFE	60000 hr RL
OPTIONAL COLOR TEMPERATURES	2700K, 3500K, 4000K
LUMEN OUTPUT	Delivered: 832 lm (LM-79)
INPUT VOLTAGE	120V or 277V
DRIVER OUTPUT	350mA, 12W
DIMMING	0-10v & Phase (ELV) Dimming - 50/60Hz 100% to 10% Dimming
CONSTRUCTION	Plated Steel and Acrylic
DIFFUSER	- Matte White Acrylic
FINISHES	Polished Chrome (-14), Oiled Bronze (-22), Satin Nickel (-24), Aged Brass (-40)
MOUNTING	4" Octagonal J-Box
STANDARDS	ETL Dry/Damp listed, ADA compliant, Conforms to UL STD 1598, Certified CAN/CSA, STD C22.2 No 250.0.

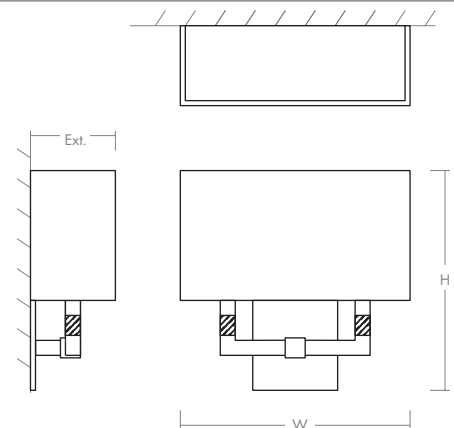

DIMENSIONS

W: 11.44"

H: 10.94"

Ext: 4.00"

M.C: 4.19" From top of fixture

Order example for standard fixture:

3-514-24 (x- Voltage - xxx-Sequence # - xx-Finish)

3: 120v, **37:** 277v

Order example for optional color temperatures: **3-514-2724**

27: 2700K, **35:** 3500K, **40:** 4000K

