

ECHO Ceiling Mount

120v: **3-694-xx**

277v: **37-694-xx**

oxygen

FIXTURE TYPE _____

LOCATION _____



PROJECT _____

DATE _____



-24 Satin Nickel

LIGHT SOURCE	2 x 10.1W LED, 3000K, CRI 90
LUMINAIRE POWER	25.7W at 120V
RATED LIFE	60000 hr RL
OPTIONAL COLOR TEMPERATURES	2700K, 3500K, 4000K
LUMEN OUTPUT	Delivered: 1277 lm (LM-79)
INPUT VOLTAGE	120V or 277V
DRIVER OUTPUT	2 x 350mA, 12W
DIMMING	0-10v & Phase (ELV) Dimming - 50/60Hz 100% to 10% Dimming
CONSTRUCTION	Plated Steel and Acrylic / Fabric
DIFFUSER	- White Grass and Matte White Acrylic
FINISHES	Satin Nickel (-24)
MOUNTING	4" Octagonal J-Box
STANDARDS	ETL Dry/Damp listed, Conforms to UL STD 1598, Certified CAN/CSA, STD C22.2 No 250.0.

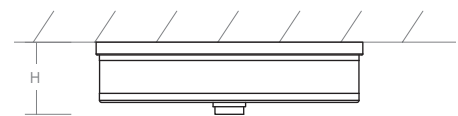

DIMENSIONS
Dia: 14.50"
H: 4.00"

Order example for standard fixture:

3-694-24 (x- Voltage - xxx-Sequence # - xx-Finish)

3: 120v, 37: 277v

Order example for optional color temperatures: **3-694-2724**

27: 2700K, 35: 3500K, 40: 4000K



ECHO Ceiling Mount

120v: **3-695-xx**

277v: **37-695-xx**

oxygen

FIXTURE TYPE _____

LOCATION _____

PROJECT _____

DATE _____





-22 Oiled Bronze



-24 Satin Nickel

LIGHT SOURCE	2 x 10.1W LED, 3000K, CRI 90
LUMINAIRE POWER	26.6W at 120V
RATED LIFE	60000 hr RL
OPTIONAL COLOR TEMPERATURES	2700K, 3500K, 4000K
LUMEN OUTPUT	Delivered: 1405 lm (LM-79)
INPUT VOLTAGE	120V or 277V
DRIVER OUTPUT	2 x 350mA, 12W
DIMMING	0-10v & Phase (ELV) Dimming - 50/60Hz 100% to 10% Dimming
CONSTRUCTION	Plated Steel and Acrylic / Fabric
DIFFUSER	- White Grass and Matte White Acrylic
METAL FINISHES	Oiled Bronze (-22), Satin Nickel (-24)
MOUNTING	4" Octagonal J-Box
STANDARDS	ETL Dry/Damp listed, Conforms to UL STD 1598, Certified CAN/CSA, STD C22.2 No 250.0.

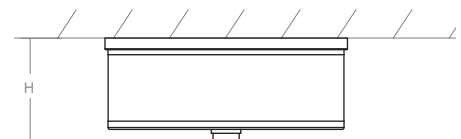

DIMENSIONS
Dia: 14.50"
H: 6.88"

Order example for standard fixture:

3-695-24 (x- Voltage - xxx-Sequence # - xx-Finish)

3: 120v, **37:** 277v

Order example for optional color temperatures: **3-695-2724**

27: 2700K, **35:** 3500K, **40:** 4000K

