

EPOCH Wall Sconce

120v : **3-564-xxx**

277v : **37-564-xxx**

oxygen

FIXTURE TYPE _____

LOCATION _____

PROJECT _____

DATE _____



-40 Aged Brass



-22 Oiled Bronze




-24 Satin Nickel

Diffusers:




-1 White Cotton

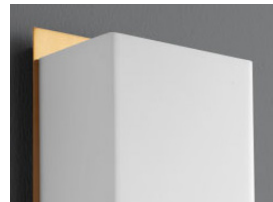

-2 Matte White Acrylic

- LIGHT SOURCE** 1 x 8.2W LED, 3000K, CRI 90
- LUMINAIRE POWER** 10.4W at 120V
- RATED LIFE** 60000 hr RL
- OPTIONAL COLOR TEMPERATURES** 2700K, 3500K, 4000K
- LUMEN OUTPUT** Delivered: (-1) Fabric: 763 lm (LM-79)
(-2) Acrylic: 1m (LM-79)
- INPUT VOLTAGE** 120V or 277V
- DRIVER OUTPUT** 350mA, 12W
- DIMMING** 0-10v & Phase (ELV) Dimming - 50/60Hz 100% to 10% Dimming
- CONSTRUCTION** Plated Steel and Acrylic / Fabric
- DIFFUSER / METAL FINISHES** (-122) White Cotton / Oiled Bronze
(-124) White Cotton / Satin Nickel
(-140) White Cotton / Aged Brass
(-222) Matte White Acrylic / Oiled Bronze
(-224) Matte White Acrylic / Satin Nickel
(-240) Matte White Acrylic / Aged Brass
- MOUNTING** 4" Octagonal J-Box
- STANDARDS** ETL Dry/Damp listed, ADA compliant, Conforms to UL STD 1598, Certified CAN/CSA, STD C22.2 No 250.0.

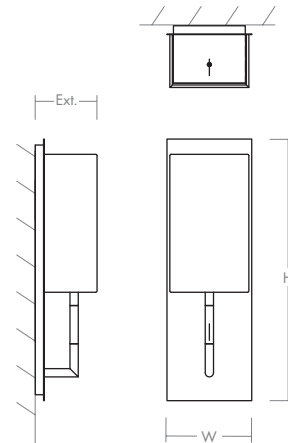

DIMENSIONS

- W:** 5.13"
- H:** 15.81"
- Ext:** 3.73"
- M.C:** 6.42" From top of fixture

Order example for standard fixture:

3-564-224 (x- Voltage - xxx-Sequence # - x-Diffuser - xx-Finish)

3: 120v, 37: 277v

Order example for optional color temperatures: **3-564-27224**

27: 2700K, 35: 3500K, 40: 4000K

