

# Pyxis Wall Sconce / Ceiling Mount

120v: **3-610-xx**

277v: **37-610-xx**


# oxygen

FIXTURE TYPE \_\_\_\_\_

LOCATION \_\_\_\_\_

PROJECT \_\_\_\_\_

DATE \_\_\_\_\_

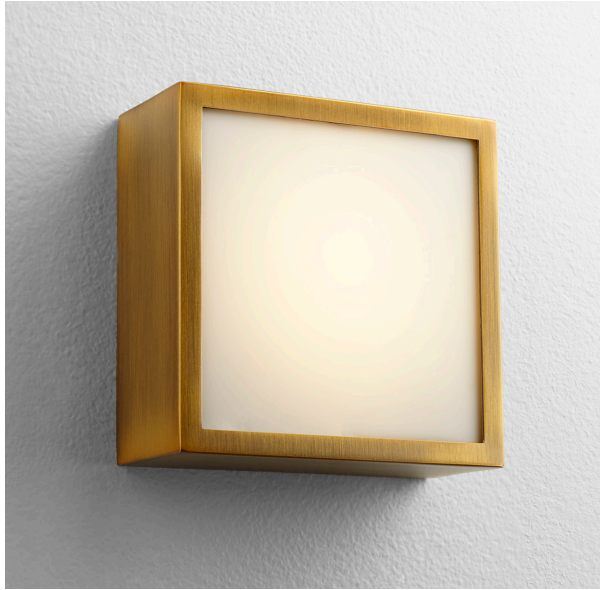

-40 Aged Brass




-22 Oiled Bronze



-24 Satin Nickel

<b>LIGHT SOURCE</b>	1 x 8.2W LED, 3000K, CRI 90
<b>LUMINAIRE POWER</b>	10.3W at 120V
<b>RATED LIFE</b>	60000 hr RL
<b>OPTIONAL COLOR TEMPERATURES</b>	2700K, 3500K, 4000K
<b>LUMEN OUTPUT</b>	Delivered: 518 lm (LM-79)
<b>INPUT VOLTAGE</b>	120V or 277V
<b>DRIVER OUTPUT</b>	350mA, 12W
<b>DIMMING</b>	0-10v & Phase (ELV) Dimming - 50/60Hz 100% to 10% Dimming
<b>CONSTRUCTION</b>	Plated Steel and Acrylic
<b>DIFFUSER</b>	- Matte White Acrylic
<b>FINISHES</b>	Oiled Bronze (-22), Satin Nickel (-24), Aged Brass (-40)
<b>MOUNTING</b>	4" Octagonal J-Box *, 2"x3" J-Box * *Deep J-Box
<b>STANDARDS</b>	ETL Dry/Damp listed, ADA compliant, CEC Title 24 Compliant, Conforms to UL STD 1598, Certified CAN/CSA, STD C22.2 No 250.0.



#### DIMENSIONS

**W:** 4.75"

**L:** 4.75"

**H:** 2.00"

**M.C:** 2.38" From top of fixture

Order example for standard fixture:

**3-610-22** (x- Voltage - xxx-Sequence # - xx-Finish)

**3:** 120v, **37:** 277v

Order example for optional color temperatures: **3-610-2722**

**27:** 2700K, **35:** 3500K, **40:** 4000K



# Pyxis Wall Sconce / Ceiling Mount

Universal Voltage: **32-612-xx**

# oxygen

FIXTURE TYPE \_\_\_\_\_

LOCATION \_\_\_\_\_

PROJECT \_\_\_\_\_

DATE \_\_\_\_\_



-40 Aged Brass



-20 Polished Nickel



-24 Satin Nickel

**LIGHT SOURCE** 1 x 22.2W LED, 3000K, CRI 90

**LUMINAIRE POWER** 26.1W at 120V

**RATED LIFE** 60000 hr RL

**OPTIONAL COLOR TEMPERATURES** 2700K, 3500K, 4000K

**LUMEN OUTPUT** Delivered: 1329 lm (LM-79)

**INPUT VOLTAGE** Universal Voltage 120V-277V

**DRIVER OUTPUT** 600mA

**DIMMING** 0-10v - 50/60Hz 100%  
to 10% Dimming


**CONSTRUCTION** Plated Steel and Acrylic

**DIFFUSER** - Matte White Acrylic

**FINISHES** Polished Nickel (-20), Satin Nickel (-24), Aged Brass (-40)

**MOUNTING** 4" Octagonal J-Box, 2"x3" J-box

**STANDARDS** ETL Dry/Damp listed, ADA compliant, Conforms to UL STD 1598, Certified CAN/CSA, STD C22.2 No 250.0.



#### DIMENSIONS

**W:** 10.25"

**L:** 10.25"

**H:** 3.25"

**M.C:** 5.13" From top of fixture

Order example for standard fixture:

**32-612-24** (x- Voltage - xxx-Sequence # - xx-Finish)

**32:** Universal Voltage

Order example for optional color temperatures: **32-612-2724**

**27:** 2700K, **35:** 3500K, **40:** 4000K

