

RHYTHM Wall Sconce / Ceiling Mount

120v: **3-648-xx**

277v: **37-648-xx**

oxygen


FIXTURE TYPE _____ LOCATION _____

PROJECT _____ DATE _____



-6 White

LIGHT SOURCE	1 x 8.2W LED, 3000K, CRI 90
LUMINAIRE POWER	10.3W at 120V
RATED LIFE	60000 hr RL
OPTIONAL COLOR TEMPERATURES	2700K, 3500K, 4000K
LUMEN OUTPUT	Delivered: 803 lm (LM-79)
INPUT VOLTAGE	120V or 277V
DRIVER OUTPUT	350mA, 12W
DIMMING	0-10v & Phase (ELV) Dimming - 50/60Hz 100% to 10% Dimming
CONSTRUCTION	Plated Steel and Acrylic
DIFFUSER	- Matte White Acrylic
FINISHES	White (-6)
MOUNTING	4" Octagonal J-Box
STANDARDS	ETL Dry/Damp listed, ADA compliant, Conforms to UL STD 1598, Certified CAN/CSA, STD C22.2 No 250.0.



DIMENSIONS
Dia: 10.00"
H: 3.00"

Order example for standard fixture:

3-648-6 (x- Voltage - xxx-Sequence # - xx-Finish)

3: 120v, 37: 277v

Order example for optional color temperatures: **3-648-276**

27: 2700K, 35: 3500K, 40: 4000K



RHYTHM Wall Sconce / Ceiling Mount

120v: **3-649-xx**

277v: **37-649-xx**

oxygen

FIXTURE TYPE _____

LOCATION _____



PROJECT _____

DATE _____



-6 White

LIGHT SOURCE	2 x 10.1W LED, 3000K, CRI 90
LUMINAIRE POWER	25.8W at 120V
RATED LIFE	60000 hr RL
OPTIONAL COLOR TEMPERATURES	2700K, 3500K, 4000K
LUMEN OUTPUT	Delivered: 1866 lm (LM-79)
INPUT VOLTAGE	120V or 277V
DRIVER OUTPUT	2 x 350mA, 12W
DIMMING	0-10v & Phase (ELV) Dimming - 50/60Hz 100% to 10% Dimming
CONSTRUCTION	Plated Steel and Acrylic
DIFFUSER	- Matte White Acrylic
FINISHES	White (-6)
MOUNTING	4" Octagonal J-Box
STANDARDS	ETL Dry/Damp listed, ADA compliant, Conforms to UL STD 1598, Certified CAN/CSA, STD C22.2 No 250.0.

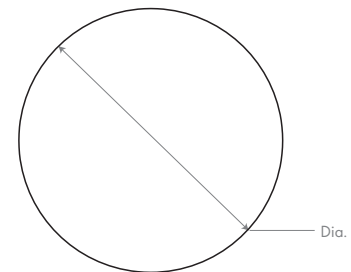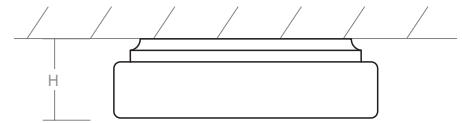

DIMENSIONS
Dia: 14.00"
H: 3.00"

Order example for standard fixture:

3-649-6 (x- Voltage - xxx-Sequence # - xx-Finish)

3: 120v, 37: 277v

Order example for optional color temperatures: **3-649-276**

27: 2700K, 35: 3500K, 40: 4000K

