

# ZENITH II Vanity


120v : **3-557-xx**

277v : **37-557-xx**


# oxygen

FIXTURE TYPE \_\_\_\_\_ LOCATION \_\_\_\_\_

PROJECT \_\_\_\_\_ DATE \_\_\_\_\_

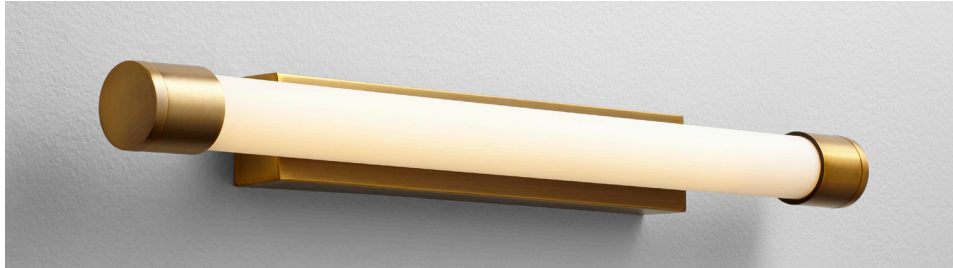


-40 Aged Brass



-14 Polished Chrome



-22 Oiled Bronze



-24 Satin Nickel

<b>LIGHT SOURCE</b>	1 x 11.1W LED, 3000K, CRI 901
<b>LUMINAIRE POWER</b>	14.5W at 120V
<b>RATED LIFE</b>	60000 hr RL
<b>OPTIONAL COLOR TEMPERATURES</b>	2700K, 3500K, 4000K
<b>LUMEN OUTPUT</b>	Delivered: 969 lm (LM-79)
<b>INPUT VOLTAGE</b>	120V or 277V
<b>DRIVER OUTPUT</b>	350mA, 12W
<b>DIMMING</b>	0-10v & Phase (ELV) Dimming - 50/60Hz 100% to 10% Dimming
<b>CONSTRUCTION</b>	Plated Steel and Acrylic
<b>DIFFUSER</b>	- Matte White Acrylic
<b>FINISHES</b>	Polished Chrome (-14), Oiled Bronze (-22), Satin Nickel (-24), Aged Brass (-40)
<b>MOUNTING</b>	2"x 3" J-Box
<b>STANDARDS</b>	ETL Dry/Damp listed, ADA compliant, Conforms to UL STD 1598, Certified CAN/CSA, STD C22.2 No 250.0.



## DIMENSIONS

**W:** 24.33"

**H:** 2.50"

**Ext:** 3.32"

**M.C:** 1.20" From top of fixture

Order example for standard fixture:

**3-557-24** (x- Voltage - xxx-Sequence # - xx-Finish)

3: 120v, 37: 277v

Order example for optional color temperatures: **3-557-2724**

27: 2700K, 35: 3500K, 40: 4000K



# ZENITH II Vanity

120v : **3-559-xx**

277v : **37-559-xx**

# oxygen

FIXTURE TYPE \_\_\_\_\_ LOCATION \_\_\_\_\_

PROJECT \_\_\_\_\_ DATE \_\_\_\_\_



-22 Oiled Bronze



-14 Polished Chrome



-24 Satin Nickel



-40 Aged Brass

LIGHT SOURCE	2 x 11.6W LED, 3000K, CRI 901
LUMINAIRE POWER	29.4W at 120V
RATED LIFE	60000 hr RL
OPTIONAL COLOR TEMPERATURES	2700K, 3500K, 4000K
LUMEN OUTPUT	Delivered: 2223 lm (LM-79)
INPUT VOLTAGE	120V or 277V
DRIVER OUTPUT	2 x 350mA, 12W
DIMMING	0-10v & Phase (ELV) Dimming - 50/60Hz 100% to 10% Dimming
CONSTRUCTION	Plated Steel and Acrylic
DIFFUSER	- Matte White Acrylic
FINISHES	Polished Chrome (-14), Oiled Bronze (-22), Satin Nickel (-24), Aged Brass (-40)
MOUNTING	2"x 3" J-Box
STANDARDS	ETL Dry/Damp listed, ADA compliant, CEC Title 24 Compliant, Conforms to UL STD 1598, Certified CAN/CSA, STD C22.2 No 250.0.



## DIMENSIONS

W: 48.82"  
H: 2.50"  
Ext: 3.32"  
M.C: 1.20" From top of fixture

Order example for standard fixture:

**3-559-24** (x- Voltage - xxx-Sequence # - xx-Finish)

3: 120v, 37: 277v

Order example for optional color temperatures: **3-559-2724**

27: 2700K, 35: 3500K, 40: 4000K

