

ZEPP Pendant

Universal Voltage: **32-632-xx**

oxygen

FIXTURE TYPE _____ LOCATION _____

PROJECT _____ DATE _____



-20 Polished Nickel




-24 Satin Nickel



-15 Black

LIGHT SOURCE	2 x 16W LED, 3000K, CRI 90
LUMINAIRE POWER	38.3W at 120V
RATED LIFE	60000 hr RL
OPTIONAL COLOR TEMPERATURES	2700K, 3500K, 4000K
LUMEN OUTPUT	Delivered: 635 lm (LM-79)
INPUT VOLTAGE	Universal Voltage 120V-277V
DRIVER OUTPUT	1000mA, 33W
DIMMING	0-10v - 50/60Hz 100% to 10% Dimming
CONSTRUCTION	Plated Steel and Acrylic
DIFFUSER	- Matte White Acrylic
FINISHES	Black (-15), Polished Nickel (-20), Satin Nickel (-24)
MOUNTING	4" Octagonal J-Box, 2"x 3" J-Box
STANDARDS	ETL Dry/Damp listed, Conforms to UL STD 1598, Certified CAN/CSA

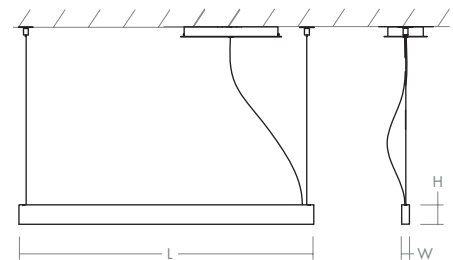

DIMENSIONS

Canopy: 13.00" L, 5.50" W, 1.375" H

Fixture: 38.00" L, 1.00" W, 2.50" H

Suspension Length: Up to 60"

Order example for standard fixture:

32-632-24 (x- Voltage - xxx-Sequence # - xx-Finish)

32: Universal Voltage

Order example for optional color temperatures: **32-632-2724**

27: 2700K, **35:** 3500K, **40:** 4000K



ZEPP Pendant

Universal Voltage: **32-633-xx**

oxygen

FIXTURE TYPE _____ LOCATION _____

PROJECT _____ DATE _____



-20 Polished Nickel



-24 Satin Nickel



-15 Black

LIGHT SOURCE 2 x 25W LED, 3000K, CRI 90

LUMINAIRE POWER 56.1W at 120V

RATED LIFE 60000 hr RL

OPTIONAL COLOR TEMPERATURES 2700K, 3500K, 4000K

LUMEN OUTPUT Delivered: 863 lm (LM-79)

INPUT VOLTAGE Universal Voltage 120V-277V

DRIVER OUTPUT 1400mA, 50W

DIMMING 0-10v - 50/60Hz 100% to 10% Dimming


CONSTRUCTION Plated Steel and Acrylic

DIFFUSER - Matte White Acrylic

FINISHES Black (-15), Polished Nickel (-20), Satin Nickel (-24)

MOUNTING 4" Octagonal J-Box, 2"x 3" J-Box

STANDARDS ETL Dry/Damp listed, Conforms to UL STD 1598, Certified CAN/CSA

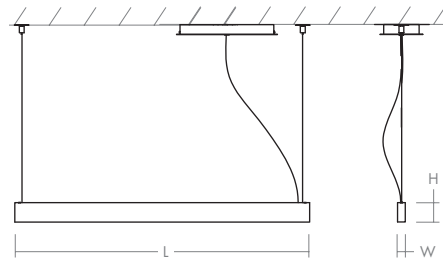

DIMENSIONS

Canopy: 13.00" L, 5.50" W, 1.375" H

Fixture: 50.00" L, 1.00" W, 2.50" H

Suspension Length: Up to 60"

Order example for standard fixture:

32-633-24 (x- Voltage - xxx-Sequence # - xx-Finish)

32: Universal Voltage

Order example for optional color temperatures: **32-633-2724**

27: 2700K, **35:** 3500K, **40:** 4000K

